




- Ideal for LAN Applications
- For use with 10Base-T, Token Ring and 100 MBPS
- High Frequency Choke for EMI Reduction


Electrical Parameters @ 25° C

| OCL (μ H Min.) | Turns Ratio ($\pm 1\%$) | DCR (Ω Max.) | Hipot (Vrms) |
|------------------------|------------------------------|-------------------------|-----------------|
| @ 100 KHz, 100m Vrms | | | for 1 minute |
| 40 | 1:1 | 0.6 | 500 |


Schematic

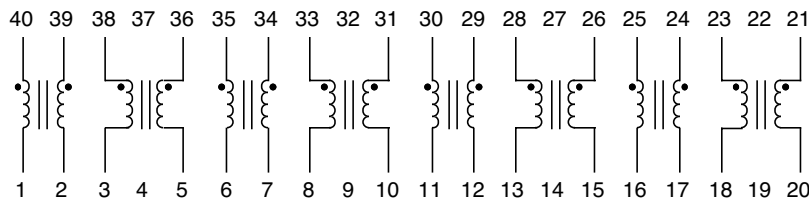

Package

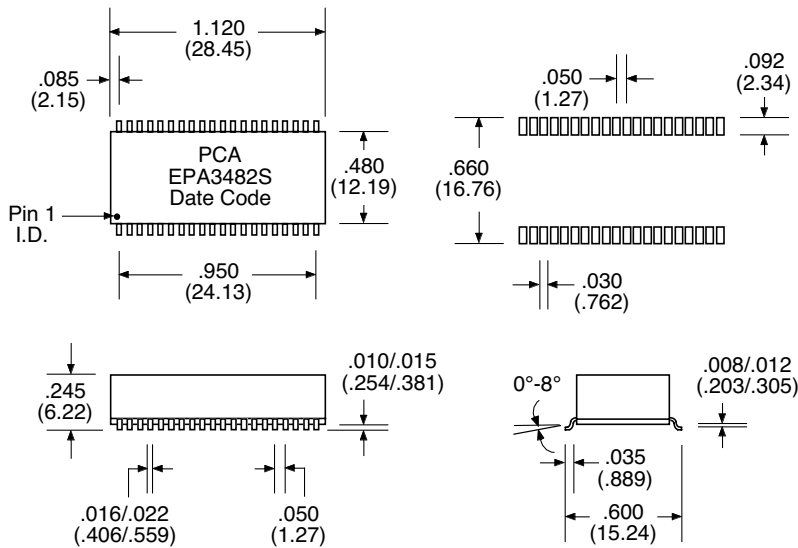

Impedance Vs. Frequency

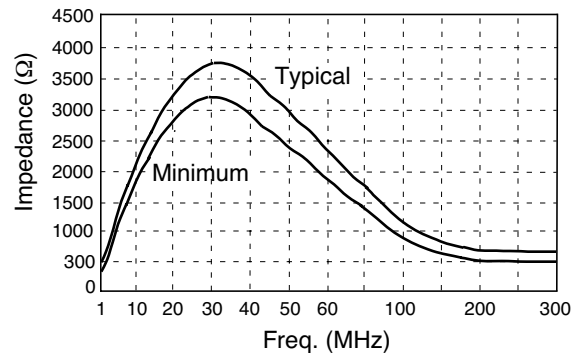

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$