
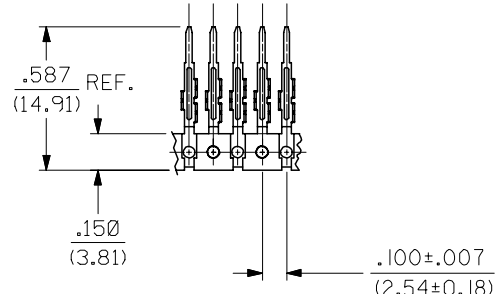


PART NO.	ENG. NO.	FINISH
40-08-0858	40258-1	.000100 HOT TIN DIP (PREPLATE)
40-15-0821	40258-2	SELECT GOLD: 0.38 MICROMETERS MIN. SELECT TIN UNDERPLATE: 2.54 MICROMETERS MIN. SELECT NICKEL UNDERPLATE: 1.27 MICROMETERS MIN.

NOTES:

1. MATERIAL: PHOSPHOR BRONZE
2. FINISH: SEE CHART
3. TERMINAL CAPABLE OF MOUNTING TO .032/(0.81) THRU .125/(3.18) THICK P.C. BOARDS.
4. TERMINAL TO BE USED WITH .005/(0.13) TO .011/(0.28) THICK MYLAR (OR EQUIVALENT) WITH SILVER INK CONDUCTORS .040/(1.02) TO .065/(1.65) WIDE ON .100/(2.54) CENTERS OR .012/(0.30) MAX. THICK FLAT FLEX CABLE WITH .063±.003/(1.60±0.08) WIDE COPPER CONDUCTORS ON .100/(2.54) CENTERS.

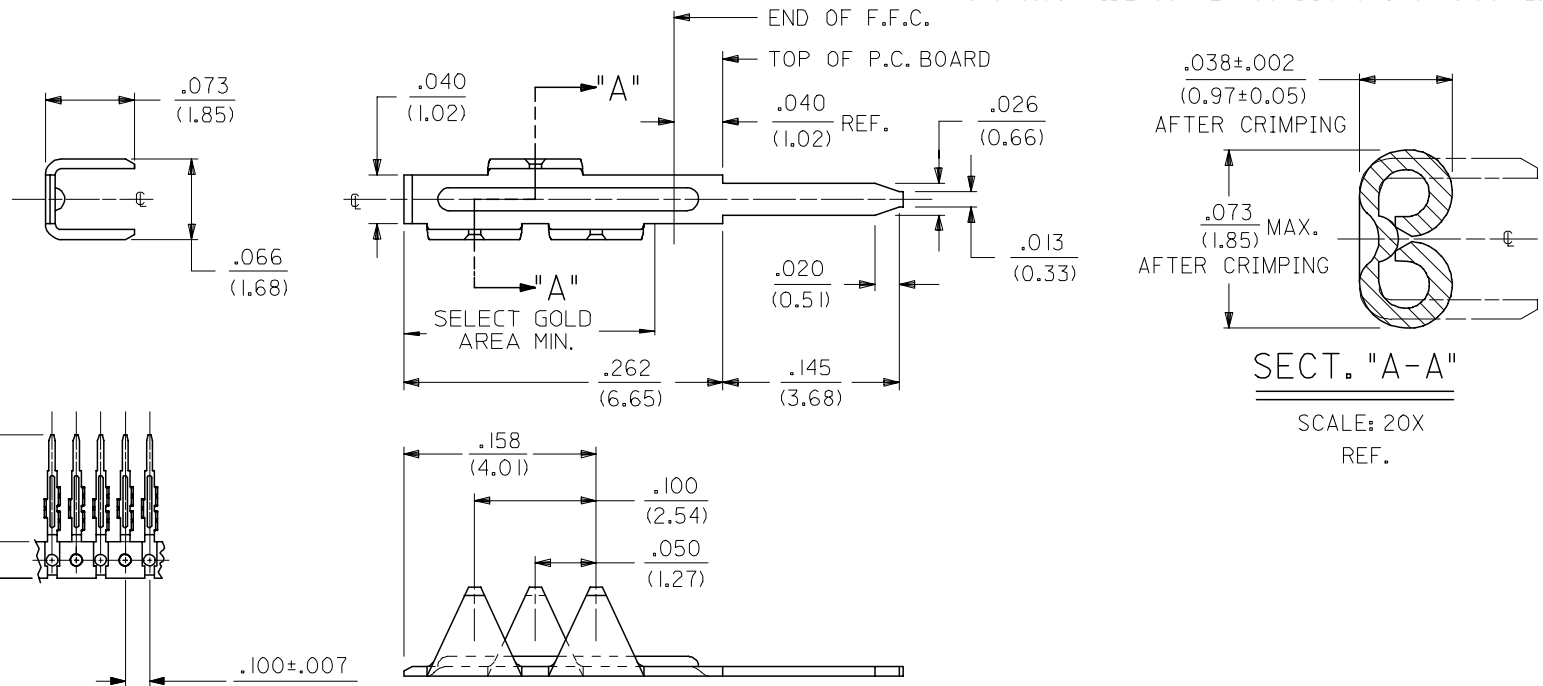

ME10, UPDATE CHART EC NO: UCP2005-0739 DRWN: JSCHAFFER 2005/02/11 CHKD: 2005/02/16 APPR: YMARGULI 2005/02/17	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		mm	INCH	IN/MM	10:1	INCH	
		4 PLACES ± --- ± ---		DRAWN BY	DATE	TITLE	
		3 PLACES ± --- ± .010		GEP	11/11/91	TERMINAL, F.F.C., P.C.BOARD MOUNT	
		2 PLACES ± 0.25 ± .014		CHECKED BY	DATE		
		1 PLACE ± 0.35 ± ---		KBP	11/11/91		
		ANGULAR ±1/2°		APPROVED BY	DATE		
				RAS	11/11/91		
				MATERIAL NO.		DOCUMENT NO.	
				SEE CHART		SD-40258-**	
				SIZE			SHEET NO.
				B			1 OF 1
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			