

## FEATURES

- Fully differential 4:1 PECL/ECL multiplexer
- Guaranteed AC-parameters over temp/voltage:
  - > 3GHz Fmax (toggle)
  - < 220ps rise/fall Time
  - < 520ps propagation delay (D-to-Q)
- Flexible power supply: 3.0V to 5.5V
- Wide operating temp range: -40°C to +85°C
- $V_{BB}$  reference for AC-coupled and single-ended applications
- 100k PECL/ECL compatible logic
- Available in 20-pin TSSOP package



ECL Pro™


## DESCRIPTION

The SY100EP57V is a high-speed, low-skew, fully differential PECL/ECL 4:1 multiplexer in a 20-pin TSSOP package. This device is a pin-for-pin, plug-in replacement to the MC10100EP57DT. The signal-path inputs (D0:D3) accept differential signals as low as 150mVpk-pk. All I/O pins are 100K EP PECL/ECL logic compatible.

AC-performance is guaranteed over the industrial -40°C to +85°C temperature range and 3.0V to 5.5V supply voltage range. This device will operate in PECL/LVPECL or ECL/LVECL mode. The SY100EP57 propagation delay is less than 520ps, and the Select-to-valid output delay is less than 575ps over temperature and voltage. For clock applications, the high-speed design combined with an extremely fast rise/fall time of less than 220ps produces a toggle frequency as high as 3GHz (400mVpk-pk swing). Two  $V_{BB}$  output reference pins (approx equal to  $V_{CC}-1.4V$ ) are available for AC-coupled or single-ended applications.

The SY100EP57V is part of Micrel's high-speed, Precision Edge timing and distribution family. For applications that require a different I/O combination, consult the Micrel website at [www.micrel.com](http://www.micrel.com), and choose from a comprehensive product line of high-speed, low skew fanout buffers, translators, and clock dividers.

## PIN CONFIGURATION/BLOCK DIAGRAM

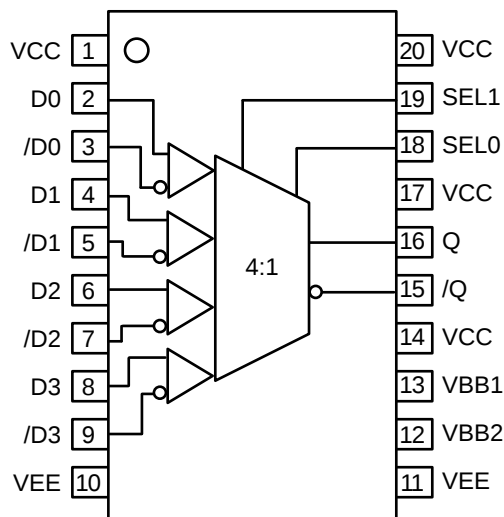

20-pin TSSOP Package

## CROSS REFERENCE TABLE

| Micrel Semiconductor | ON Semiconductor |
|----------------------|------------------|
| SY100EP57VK4I        | MC100EP57DT      |
| SY100EP57VK4ITR      | MC100EP57DTR2    |

## PIN DESCRIPTION

| Pin                | Pin Number               | Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| D0: D3<br>/D0: /D3 | 2, 4, 6, 8<br>3, 5, 7, 9 | Input Channels 0-3 PECL/ECL differential signal inputs. Multiplexing of these 4 differential inputs is controlled by SEL0, SEL1. The signal inputs include internal 75k $\Omega$ pull-down resistors. Default condition is LOW when left floating. The input signal should be terminated externally. See “ <i>Termination</i> ” section                                                                                                                                                                                                                                                                                                                                                                                                 |
| VEE                | 10, 11                   | Negative Power Supply: For PECL/LVPECL applications, connect to Ground. Both V <sub>EE</sub> pins must be connected together, externally on the PCB, for proper operation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| VBB1, VBB2         | 13, 12                   | Reference output voltage. This reference is typically used to bias the unused inverting input for single-ended input applications, or as the termination point for AC-coupled differential input applications. V <sub>BB</sub> reference value is approximately V <sub>CC</sub> –1.4V, and tracks V <sub>CC</sub> 1:1. Maximum sink/source capability for each V <sub>BB</sub> reference pin is 0.50mA. For single ended PECL inputs, connect to the unused input through a 50 $\Omega$ resistor. Decouple the V <sub>BB</sub> pin with a 0.01 $\mu$ F capacitor. For PECL/LVPECL inputs, the decoupling capacitor is connected to V <sub>CC</sub> , since PECL signals are referenced to V <sub>CC</sub> . Leave floating if not used. |
| /Q, Q              | 15, 16                   | 100KEP PECL/ECL compatible differential output. PECL/ECL termination is with a 50 $\Omega$ resistor to V <sub>CC</sub> –2V. Unused single-ended outputs must have a balanced load. For AC-coupled applications, the output stage emitter follower must have a DC current path to ground. See “ <i>Termination</i> ” section.                                                                                                                                                                                                                                                                                                                                                                                                            |
| SEL0, SEL1         | 18, 19                   | 100KEP PECL/ECL compatible 4:1 MUX select control. See “ <i>MUX Select Truth Table</i> .” Each pin includes an internal 75k $\Omega$ pull-down resistor. Default condition when left floating is LOW.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| VCC                | 1, 14, 17, 20            | Positive Power Supply. All V <sub>CC</sub> pins must be connected to the same power supply externally. Bypass with 0.1 $\mu$ F//0.01 $\mu$ F low ESR capacitors.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## MUX SELECT TRUTH TABLE

| SEL1 | SEL0 | DATA OUT |
|------|------|----------|
| L    | L    | D0, /D0  |
| L    | H    | D1, /D1  |
| H    | L    | D2, /D2  |
| H    | H    | D3, /D3  |

**ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>**

| Symbol            | Rating                                                                                                                                                   | Value                  | Unit   |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|--------|
| $V_{CC} - V_{EE}$ | Power Supply Voltage                                                                                                                                     | 6.0                    | V      |
| $V_{IN}$          | Input Voltage ( $V_{CC} = 0V$ , $V_{IN}$ not more negative than $V_{EE}$ )<br>Input Voltage ( $V_{EE} = 0V$ , $V_{IN}$ not more positive than $V_{CC}$ ) | -6.0 to 0<br>+6.0 to 0 | V<br>V |
| $I_{OUT}$         | Output Current<br>-Continuous<br>-Surge                                                                                                                  | 50<br>100              | mA     |
| $I_{BB}$          | $V_{BB}$ Sink/Source Current <sup>(2)</sup>                                                                                                              | ±0.5                   | mA     |
| $T_A$             | Operating Temperature Range                                                                                                                              | -40 to +85             | °C     |
| $T_{store}$       | Storage Temperature Range                                                                                                                                | -65 to +150            | °C     |
| $\theta_{JA}$     | Package Thermal Resistance (Junction-to-Ambient)<br>-Still-Air (single-layer PCB)<br>-Still-Air (multi-layer PCB)<br>-500lfpm (multi-layer PCB)          | 115<br>75<br>65        | °C/W   |
| $\theta_{JC}$     | Package Thermal Resistance (Junction-to-Case)                                                                                                            | 21                     | °C/W   |

**Note 1.** Permanent device damage may occur if ABSOLUTE MAXIMUM RATINGS are exceeded. This is a stress rating only and functional operation is not implied at conditions other than those detailed in the operational sections of this data sheet. Exposure to ABSOLUTE MAXIMUM RATING conditions for extended periods may affect device reliability.

**Note 2.** Due to the limited drive capability, the  $V_{BB}$  reference should only be used for inputs from the same package device (i.e., do not sue for other devices).

**DC ELECTRICAL CHARACTERISTICS<sup>(1)</sup>**

| Symbol   | Parameter                                                      | $T_A = -40^\circ\text{C}$  |                          |                            | $T_A = +25^\circ\text{C}$  |                          |                            | $T_A = +85^\circ\text{C}$  |                          |                            | Unit | Condition         |
|----------|----------------------------------------------------------------|----------------------------|--------------------------|----------------------------|----------------------------|--------------------------|----------------------------|----------------------------|--------------------------|----------------------------|------|-------------------|
|          |                                                                | Min.                       | Typ.                     | Max.                       | Min.                       | Typ.                     | Max.                       | Min.                       | Typ.                     | Max.                       |      |                   |
| $V_{CC}$ | Power Supply Voltage<br>(PECL)<br>(LVPECL)<br>(ECL)<br>(LVECL) | 4.5<br>3.0<br>-5.5<br>-3.8 | 5.0<br>—<br>-5.0<br>-3.3 | 5.5<br>3.8<br>-4.5<br>-3.0 | 4.5<br>3.0<br>-5.5<br>-3.8 | 5.0<br>—<br>-5.0<br>-3.3 | 5.5<br>3.8<br>-4.5<br>-3.0 | 4.5<br>3.0<br>-5.5<br>-3.8 | 5.0<br>—<br>-5.0<br>-3.3 | 5.5<br>3.8<br>-4.5<br>-3.0 | V    |                   |
| $I_{EE}$ | Supply Current                                                 | —                          | 35                       | 50                         | —                          | 35                       | 50                         | —                          | 35                       | 50                         | mA   | No Load           |
| $I_{IH}$ | Input HIGH Current                                             | —                          | —                        | 75                         | —                          | —                        | 75                         | —                          | —                        | 80                         | μA   | $V_{IN} = V_{IH}$ |
| $I_{IL}$ | Input LOW Current<br>All Inputs                                | 0.5                        | —                        | —                          | 0.5                        | —                        | —                          | 0.5                        | —                        | —                          | μA   | $V_{IN} = V_{IL}$ |
| $C_{IN}$ | Input Capacitance (TSSOP)                                      | —                          | —                        | —                          | —                          | 1.0                      | —                          | —                          | —                        | —                          | pF   |                   |

**Note 1.** 100KEP circuits are designed to meet the DC specifications shown in the above table after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and traverse airflow greater than 500lfpm is maintained.

**(100KEP) LVPECL DC ELECTRICAL CHARACTERISTICS<sup>(1)</sup>** $V_{CC} = 3.3V \pm 10\%$ ,  $V_{EE} = 0V$ 

| Symbol      | Parameter                                           | $T_A = -40^\circ C$ |      |          | $T_A = +25^\circ C$ |      |          | $T_A = +85^\circ C$ |      |          | Unit | Condition                 |
|-------------|-----------------------------------------------------|---------------------|------|----------|---------------------|------|----------|---------------------|------|----------|------|---------------------------|
|             |                                                     | Min.                | Typ. | Max.     | Min.                | Typ. | Max.     | Min.                | Typ. | Max.     |      |                           |
| $V_{IL}$    | Input LOW Voltage (Single-Ended)                    | 1355                | —    | 1675     | 1355                | —    | 1675     | 1355                | —    | 1675     | mV   |                           |
| $V_{IH}$    | Input HIGH Voltage (Single-Ended)                   | 2075                | —    | 2420     | 2075                | —    | 2420     | 2075                | —    | 2420     | mV   |                           |
| $V_{OL}$    | Output LOW Voltage                                  | 1355                | 1480 | 1605     | 1355                | 1480 | 1605     | 1355                | 1480 | 1605     | mV   | $50\Omega$ to $V_{CC}-2V$ |
| $V_{OH}$    | Output HIGH Voltage                                 | 2155                | 2280 | 2405     | 2155                | 2280 | 2405     | 2155                | 2280 | 2405     | mV   | $50\Omega$ to $V_{CC}-2V$ |
| $V_{BB}$    | Output Reference Voltage                            | 1775                | 1875 | 1975     | 1775                | 1875 | 1975     | 1775                | 1875 | 1975     | mV   |                           |
| $V_{IHCMR}$ | Input HIGH Voltage <sup>(2)</sup> Common Mode Range | 2.0                 | —    | $V_{CC}$ | 2.0                 | —    | $V_{CC}$ | 2.0                 | —    | $V_{CC}$ | V    |                           |

**Note 1.** 100KEP circuits are designed to meet the DC specifications shown in the above table after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and traverse airflow greater than 500lfpm is maintained. Input and output parameters are at  $V_{CC} = 3.3V$ . They vary 1:1 with  $V_{CC}$ .

**Note 2.** The  $V_{IHCMR}$  range is referenced to the most positive side of the differential input signal.

**(100KEP) PECL DC ELECTRICAL CHARACTERISTICS<sup>(1)</sup>** $V_{CC} = 5.0V \pm 10\%$ ,  $V_{EE} = 0V$ 

| Symbol      | Parameter                                           | $T_A = -40^\circ C$ |      |          | $T_A = +25^\circ C$ |      |          | $T_A = +85^\circ C$ |      |          | Unit | Condition                 |
|-------------|-----------------------------------------------------|---------------------|------|----------|---------------------|------|----------|---------------------|------|----------|------|---------------------------|
|             |                                                     | Min.                | Typ. | Max.     | Min.                | Typ. | Max.     | Min.                | Typ. | Max.     |      |                           |
| $V_{IL}$    | Input LOW Voltage (Single-Ended)                    | 3055                | —    | 3375     | 3055                | —    | 3375     | 3055                | —    | 3375     | mV   |                           |
| $V_{IH}$    | Input HIGH Voltage (Single-Ended)                   | 3775                | —    | 4120     | 3775                | —    | 4120     | 3775                | —    | 4120     | mV   |                           |
| $V_{OL}$    | Output LOW Voltage                                  | 3055                | 3180 | 3305     | 3055                | 3180 | 3305     | 3055                | 3180 | 3305     | mV   | $50\Omega$ to $V_{CC}-2V$ |
| $V_{OH}$    | Output HIGH Voltage                                 | 3855                | 3980 | 4105     | 3855                | 3980 | 4105     | 3855                | 3980 | 4105     | mV   | $50\Omega$ to $V_{CC}-2V$ |
| $V_{BB}$    | Output Reference Voltage                            | 3475                | 3575 | 3675     | 3475                | 3575 | 3675     | 3475                | 3575 | 3675     | mV   |                           |
| $V_{IHCMR}$ | Input HIGH Voltage <sup>(2)</sup> Common Mode Range | 2.0                 | —    | $V_{CC}$ | 2.0                 | —    | $V_{CC}$ | 2.0                 | —    | $V_{CC}$ | V    |                           |

**Note 1.** 100KEP circuits are designed to meet the DC specifications shown in the above table after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and traverse airflow greater than 500lfpm is maintained. Input and output parameters are at  $V_{CC} = 3.3V$ . They vary 1:1 with  $V_{CC}$ .

**Note 2.** The  $V_{IHCMR}$  range is referenced to the most positive side of the differential input signal.

**(100KEP) ECL/LVECL DC ELECTRICAL CHARACTERISTICS<sup>(1)</sup>** $V_{CC} = 0V$ ,  $V_{EE} = -5.5V$  to  $-3.0V$ 

| Symbol      | Parameter                                              | $T_A = -40^{\circ}C$ |       |       | $T_A = +25^{\circ}C$ |       |       | $T_A = +85^{\circ}C$ |       |       | Unit | Condition                 |
|-------------|--------------------------------------------------------|----------------------|-------|-------|----------------------|-------|-------|----------------------|-------|-------|------|---------------------------|
|             |                                                        | Min.                 | Typ.  | Max.  | Min.                 | Typ.  | Max.  | Min.                 | Typ.  | Max.  |      |                           |
| $V_{IL}$    | Input LOW Voltage                                      | -1945                | —     | -1625 | -1945                | —     | -1625 | -1945                | —     | -1625 | mV   |                           |
| $V_{IH}$    | Input HIGH Voltage                                     | -1225                | —     | -880  | -1225                | —     | -880  | -1225                | —     | -880  | mV   |                           |
| $V_{OL}$    | Output LOW Voltage                                     | -1945                | -1820 | -1695 | -1945                | -1820 | -1695 | -1945                | -1820 | -1695 | mV   | $50\Omega$ to $V_{CC}-2V$ |
| $V_{OH}$    | Output HIGH Voltage                                    | -1145                | -1020 | -895  | -1145                | -1020 | -895  | -1145                | -1020 | -895  | mV   | $50\Omega$ to $V_{CC}-2V$ |
| $V_{BB}$    | Output Reference Voltage                               | -1525                | -1425 | -1325 | -1525                | -1425 | -1325 | -1525                | -1425 | -1325 | mV   |                           |
| $V_{IHCMR}$ | Input HIGH Voltage <sup>(2)</sup><br>Common Mode Range | $V_{EE} + 2.0$       |       | 0.0   | $V_{EE} + 2.0$       |       | 0.0   | $V_{EE} + 2.0$       |       | 0.0   | V    |                           |

**Note 1.** 100KEP circuits are designed to meet the DC specifications shown in the above table after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and traverse airflow greater than 500lfpm is maintained. Input and output parameters are at  $V_{CC} = 3.3V$ . They vary 1:1 with  $V_{CC}$ .

**Note 2.** The  $V_{IHCMR}$  range is referenced to the most positive side of the differential input signal.

**AC ELECTRICAL CHARACTERISTICS** $V_{CC} = 0V$ ;  $V_{EE} = -3.0V$  to  $-5.5V$  or  $V_{CC} = 3.0V$  to  $5.5V$ ,  $V_{EE} = 0V$ 

| Symbol                 | Parameter                                                      | $T_A = -40^{\circ}C$ |            |            | $T_A = +25^{\circ}C$ |            |            | $T_A = +85^{\circ}C$ |            |            | Unit                | Condition     |
|------------------------|----------------------------------------------------------------|----------------------|------------|------------|----------------------|------------|------------|----------------------|------------|------------|---------------------|---------------|
|                        |                                                                | Min.                 | Typ.       | Max.       | Min.                 | Typ.       | Max.       | Min.                 | Typ.       | Max.       |                     |               |
| $f_{MAX}$              | Max. Toggle Frequency <sup>(1)</sup>                           | 3                    | —          | —          | 3                    | —          | —          | 3                    | —          | —          | GHz                 |               |
| $t_{PLH}$<br>$t_{PHL}$ | Propagation Delay (Differential)<br>D to Q, /Q<br>SEL to Q, /Q | 250<br>300           | 310<br>370 | 450<br>500 | 250<br>300           | 315<br>380 | 475<br>520 | 250<br>300           | 320<br>390 | 520<br>575 | ps<br>ps            |               |
| $t_{SKEW}$             | Part-to-Part Skew <sup>(2)</sup>                               | —                    | —          | 200        | —                    | —          | 200        | —                    | —          | 200        | ps                  |               |
| $t_{JITTER}$           | Cycle-to-Cycle Jitter (rms)                                    | —                    | 0.2        | < 1        | —                    | 0.2        | < 1        | —                    | 0.2        | < 1        | ps <sub>rms</sub>   |               |
|                        | Random Jitter                                                  | —                    | —          | —          | —                    | <1         | —          | —                    | —          | —          | ps <sub>rms</sub>   | <b>Note 3</b> |
|                        | Deterministic Jitter<br>@1.25Gbps<br>@2.5Gbps                  | —                    | —          | —          | —                    | <25<br><50 | —          | —                    | —          | —          | ps <sub>pk-pk</sub> | <b>Note 4</b> |
| $V_{DIFF}$             | Input Voltage (Differential)                                   | 150                  | 800        | 1200       | 150                  | 800        | 1200       | 150                  | 800        | 1200       | mV                  |               |
| $t_r$ , $t_f$          | Output Rise/Fall Time Q, /Q<br>(20% to 80%)                    | —                    | 120        | 170        | —                    | 140        | 200        | —                    | 150        | 220        | ps                  |               |

**Note 1.** Measured with 750mV input signal, 50% duty cycle. Output swing  $\geq 400mV$ . All loading with a  $50\Omega$  to  $V_{CC} - 2.0V$ .

**Note 2.** Skew is measured between outputs under identical transitions. Duty cycle skew is defined only for differential operation when the delays are measured from the cross point of the inputs to the cross point of the outputs.

**Note 3.** RJ is measured with a K28.7 comma detect character pattern, measured at 1.25Gbps and 2.5Gbps.

**Note 4.** DJ is measured at 1.25Gbps and 2.5Gbps, with both K28.5 and  $2^{23}-1$  PRBS pattern

**PRODUCT ORDERING CODE**



| Ordering Code                  | Package Type | Operating Range | Package Marking | Ordering Code                    | Package Type | Operating Range | Package Marking |
|--------------------------------|--------------|-----------------|-----------------|----------------------------------|--------------|-----------------|-----------------|
| SY100EP57VK4C                  | K4-20-1      | Commercial      | XEP57V          | SY100EP57VK4I <sup>(2)</sup>     | K4-20-1      | Industrial      | XEP57V          |
| SY100EP57VK4CTR <sup>(1)</sup> | K4-20-1      | Commercial      | XEP57V          | SY100EP57VK4ITR <sup>(1,2)</sup> | K4-20-1      | Industrial      | XEP57V          |

**Note 1.** Tape and Reel.


**Note 2.** Recommended for new designs.

## TYPICAL OPERATING CHARACTERISTICS

$V_{CC} = 3.3V$ ,  $V_{EE} = GND$ ,  $T_A = 25^\circ C$ , unless otherwise stated.

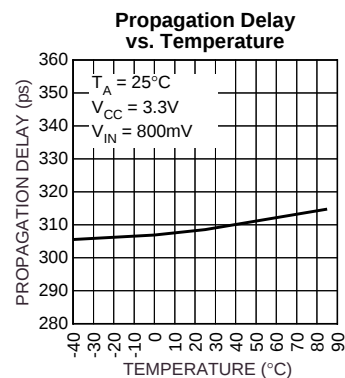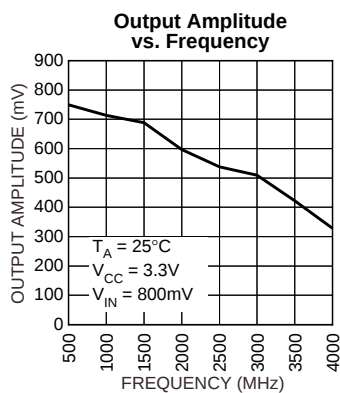


500MHz Output

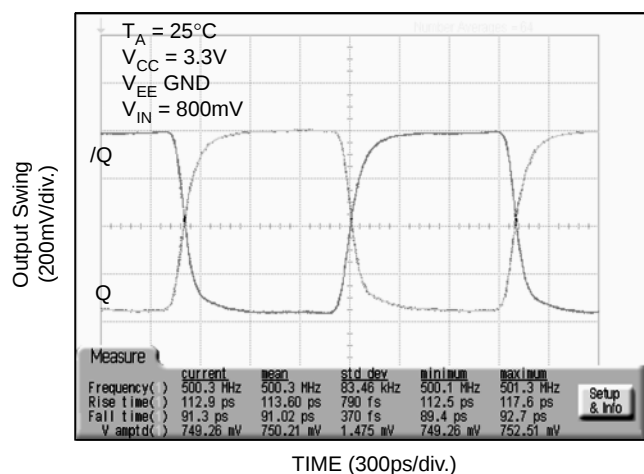


TIME (300ps/div.)

1.5GHz Output

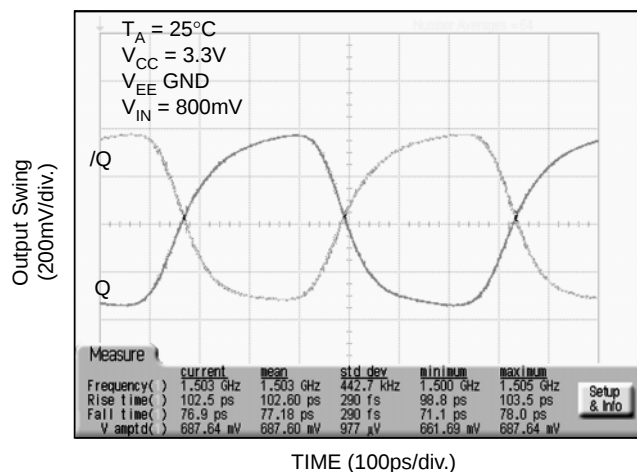


TIME (100ps/div.)

2.5GHz Output

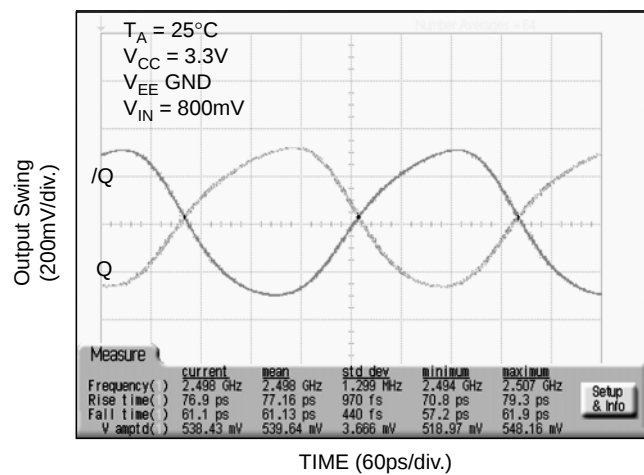


TIME (60ps/div.)

3.0GHz Output

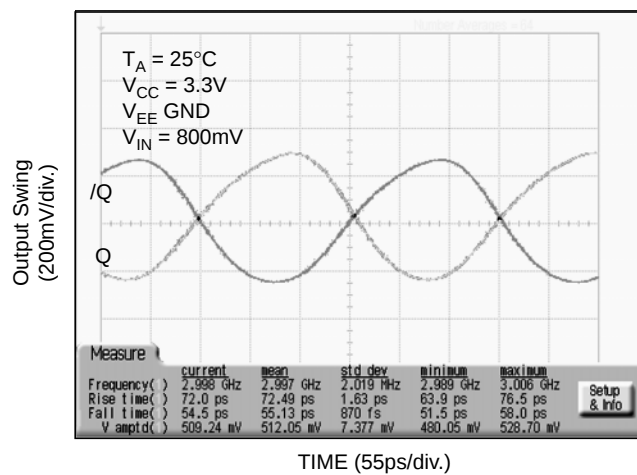


TIME (55ps/div.)

## TERMINATION RECOMMENDATIONS

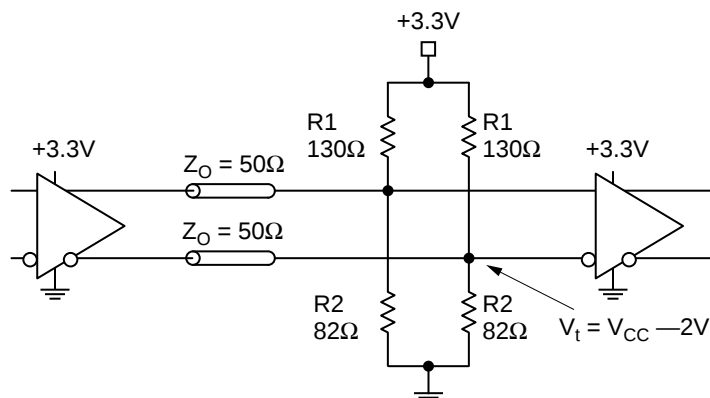

**Figure 1. Parallel Termination–Thevenin Equivalent**

**Note 1.** For +5.0V systems:  $R_1 = 82\Omega$ ,  $R_2 = 130\Omega$ .

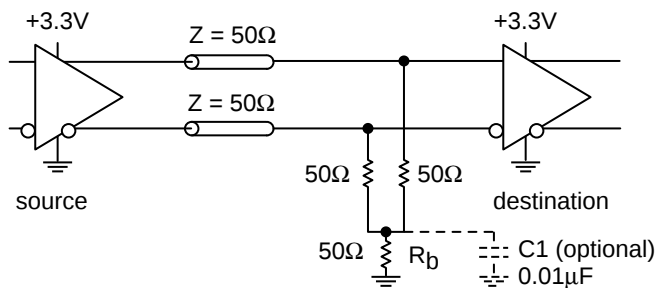


**Figure 2. Three-Resistor "Y-Termination"**

**Note 1.** Power-saving alternative to Thevenin termination.

**Note 2.** Place termination resistors as close to destination inputs as possible.

**Note 3.**  $R_b$  resistor sets the DC bias voltage, equal to  $V_t$ . For +3.3V systems  $R_b = 46\Omega$  to  $50\Omega$ . For +5V systems,  $R_b = 110\Omega$ .

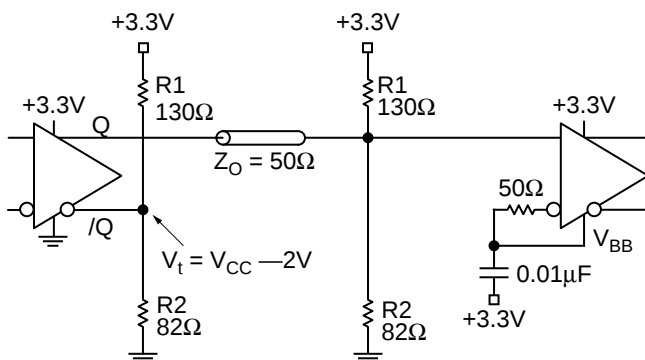


**Figure 3. Terminating Unused I/O**

**Note 1.** Unused output ( $I/Q$ ) must be terminated to balance the output.


**Note 2.** Micrel's differential I/O logic devices include a  $V_{BB}$  reference pin.

**Note 3.** Connect unused input through  $50\Omega$  to  $V_{BB}$ . Bypass with a  $0.01\mu F$  capacitor to  $V_{CC}$ , not GND.



**Note 4.** For +2.5V systems:  $R_1 = 250\Omega$ ,  $R_2 = 62.5\Omega$ .

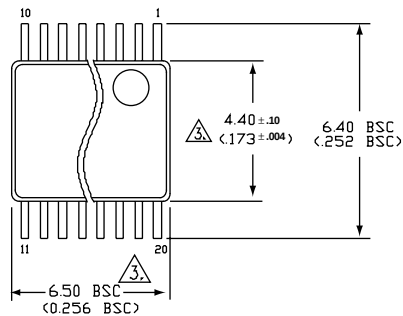**20 LEAD TSSOP (K4-20-1)**

TOP VIEW



END VIEW

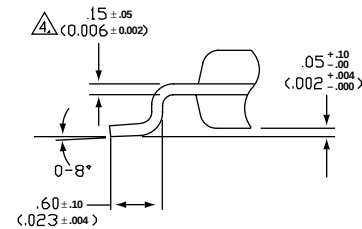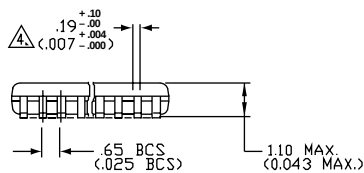DETAIL 'A'  
(VIEW ROTATED 90° C.W.)

SIDE VIEW

## NOTES:

1. DIMENSIONS ARE IN MM(INCHES).
2. CONTROLLING DIMENSION: MM.
3. DIMENSION DOES NOT INCLUDE MOLD FLASH OF 0.254(0.010) MAX.
4. THIS DIMENSION INCLUDES LEAD FINISH.

Rev.01

**MICREL, INC. 1849 FORTUNE DRIVE SAN JOSE, CA 95131 USA**TEL + 1 (408) 944-0800 FAX + 1 (408) 944-0970 WEB <http://www.micrel.com>

The information furnished by Micrel in this datasheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2003 Micrel, Incorporated.