



CELEBRATING 40 YEARS IN BUSINESS

# SURGE ABSORBERS



**THIS PAGE WAS INTENTIONALLY LEFT BLANK.**

**Table of Contents**

Standard Series . . . . . 2  
1pF Series Specifications . . . . . 3  
3pF Series Specifications . . . . . 3  
12pF Series Specifications . . . . . 3  
Reliability and Test Conditions . . . . . 4  
Labeling . . . . . 5  
Test . . . . . 5  
Tape Dimensions . . . . . 6  
Leader and Blank Portion . . . . . 6  
Reel Dimensions . . . . . 7  
Top Cover Tape Strength . . . . . 7  
Soldering Profile . . . . . 8

## Standard Series

### Features

1. Fast response time.
2. Low capacitance.
3. Excellent solderability.
4. Nickel Barrier.

### Applications

1. Protection from ESD.
2. Car radio, Antenna.

### Part Number System

**WPSSA**    **D**    **0603** - **101** - **01** - **T**  
 (1)        (2)        (3)        (4)        (5)        (6)

**(1) Series**

**WPSSA:** IEC-61000-4-2, ESD  
(1/30ns, HBM) protection.

**(2) Material & Design**

B, D

**(3) Dimensions (inches)\***

First two digits: length (inches)  
Last two digits: width (inches)

**(4) Maximum continuous working voltage**

First two digits are integral with  
the third digit being the number of zeros

**(5) Capacitance**

**01:** Max. 1 pF  
**03:** Max. 3 pF  
**12:** Max. 12 pF

**(6) Packaging**



**B:** Bulk Package  
**T:** Tape & Reel (Ø 178mm [ 7 inches])  
**L:** Tape & Reel (Ø 254mm [10 inches])

\* 0603(inches) is equivalent to 1608(mm).  
0805(inches) is equivalent to 2012(mm).  
1206(inches) is equivalent to 3216 (mm).

## Shape & Dimensions

unit : mm [inches]

Size	L	W	T	C1
<b>0603</b>	1.6 ± 0.15 [.063 ± .006]	0.8 ± 0.15 [.031 ± .006]	0.6 ± 0.2 [.024 ± .008]	0.30 ± 0.20 [.012 ± .008]
<b>0805</b>	2.0 ± 0.2 [.079 ± .008]	1.25 ± 0.2 [.049 ± .008]	0.8 ± 0.2 [.031 ± .008]	0.50 ± 0.30 [.020 ± .012]

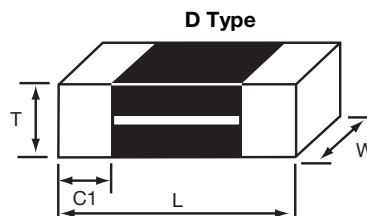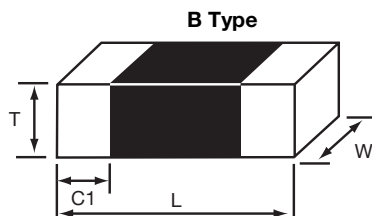

### 1pF Series Specifications

Part Number	Maximum Ratings		Electrical Characteristics		
	Working Voltage	Leakage Current	Varistor Voltage @ 1mA DC		Maximum Capacitance
	DC	Maximum Leakage Current	Min.	Max.	@1MHz
	Volts	µA	Volts	Volts	pF
	V <sub>WDC</sub>	I <sub>L</sub>	V <sub>V</sub>		C
WPSSAD0805-101-01	100	50	115	150	1.0
WPSSAD0805-201-01	200		230	288	
WPSSAD0805-301-01	300		345	431	
WPSSAD0805-401-01	400		460	574	
WPSSAD0805-501-01	500		576	716	

### 3pF Series Specifications



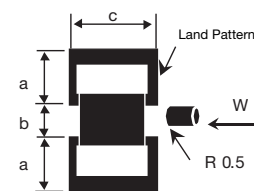
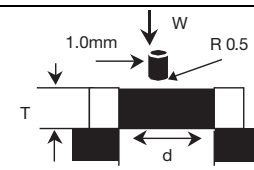
Part Number	Maximum Ratings		Electrical Characteristics		
	Working Voltage	Leakage Current	Varistor Voltage @ 1mA DC		Maximum Capacitance
	DC	Maximum Leakage Current	Min.	Max.	@1MHz
	Volts	µA	Volts	Volts	pF
	V <sub>WDC</sub>	I <sub>L</sub>	V <sub>V</sub>		C
WPSSAB0603-101-03	100	50	115	150	3.0
WPSSAB0603-201-03	200		230	288	
WPSSAB0603-301-03	300		345	431	
WPSSAB0805-101-03	100		115	150	
WPSSAB0805-151-03	150		173	216	
WPSSAB0805-201-03	200		230	288	
WPSSAB0805-301-03	300		345	431	
WPSSAB0805-401-03	400		460	574	
WPSSAB0805-501-03	500		576	716	

### 12pF Series Specifications

Part Number	Maximum Ratings		Electrical Characteristics		
	Working Voltage	Leakage Current	Varistor Voltage @ 1mA DC		Maximum Capacitance
	DC	Maximum Leakage Current	Min.	Max.	@1MHz
	Volts	µA	Volts	Volts	pF
	V <sub>WDC</sub>	I <sub>L</sub>	V <sub>V</sub>		C
WPSSAB0805-101-12	100	50	115	150	12
WPSSAB0805-201-12	200		230	288	

Please note: Parts with other electrical characteristics available upon request.

## Reliability and Test Conditions

ITEM	Requirements				Test Condition
	0402	0603	0805	1206	
Operating temp. Range	-55 ~ +125°C				-
Storage temp. & humidity	40°C max, 70% RH max.				Packed Condition
Resistance to solder heat	1. No damage such as cracks should be visible in chip element. 2. More than 75% of the terminal electrode shall be covered with new solder.				Preheat Temperature: 100 to 150°C Preheat time: 1 min. Solder temperature: 260 ± 10°C Dipping time: 10 ± 0.5 sec.
Solderability	1. More than 90% of the terminal electrode shall be covered with new solder.  $S \geq T * 0.5$				Preheat Temperature: 100 to 150°C Preheat time: 1 min. Solder temperature: 260 ± 10°C Dipping time: 3 ± 1 sec.
Re-flow Soldering	1. More than 50% of the terminal electrode shall be covered with new solder. 2. Varistor voltage change: Within ±10%				Preheat Temperature: 150°C Preheat time: 1 min. Solder temperature: 260°C Soldering time: 10 sec. max. (re-flow soldering profile)
Tensile strength	1. The terminal electrode shall break off not the chip element. Unit: Kgf(W)				
	W	-	0.7	1.2	2.0
Flexure Strength	1. No mechanical damage. Unit: mm (a,b,c), key f (W)				
	a	-	1.0	1.0	1.3
	b	-	0.8	1.0	1.5
	c	-	1.3	1.3	3.0
	W	-	1.0	4.0	5.0
Bending strength	Body shall not be damaged by forces applied as shown on right. Unit: mm (d), kgf(W)				
	d	-	1.3	1.3	2.0
	W	-	2.0	3.0	4.0
Drop	1. No mechanical damage.				Drop 10 times on a concrete floor from a height of 91cm.
Vibration	1. No mechanical damage.				Frequency: 10~55~10Hz Amplitude: 1.52mm Direction and time: X,Y, Z directions for 1 hour
Thermal Shock (Temperature cycle)	1. No mechanical damage. 2. Varistor Voltage change: within ±10%				Temperature: -40 ± 3°C, 85 ± 3°C Cycle: 30 ± 3 min. each 100 cycles then measured at ambient temperature after 24 hours
Heat Load Resistance	1. No mechanical damage. 2. Varistor Voltage change: within ±10%				Temperature: 85 ± 2°C Applied Voltage: Rated Voltage Time: 1000 hours measured at ambient temperature after 24 hours
Low Temperature Resistance	1. No mechanical damage. 2. Varistor Voltage change: within ±10%				Temperature: -40 ± 5°C Time: 1000 hours measured at ambient temperature after 24 hours
Humidity Resistance	1. No mechanical damage. 2. Varistor Voltage change: within ±10%				Temperature: 40 ± 2°C Humidity: 90 ~95% RH Time: 500 hours measured at ambient temperature after 24 hours
Humidity Load Resistance	1. No mechanical damage. 2. Varistor Voltage change: within ±10%				Temperature: 40 ± 2°C Humidity: 90 ~95% RH Applied Voltage: Rated Voltage Time: 500 hours measured at ambient temperature after 24 hours

## Labeling

Label



- a) Part name
- b) Lot No.
- c) Quantity

## Standard quantity for packaging

Type (EIA)	Reel Size	Tape & Reel			Bulk
		Reel	Inner box	Carton box	Vinyl or Cassette
0603	7 inch	4,000	40,000	160,000	As requested
	10 inch	8,000	80,000	320,000	
0805	7 inch	3,000	30,000	120,000	
	10 inch	7,000	70,000	280,000	

Please note: Packing method can be changed upon request.


## Test

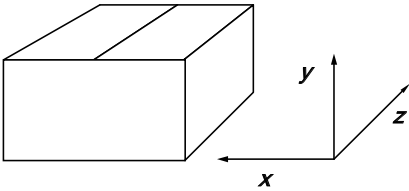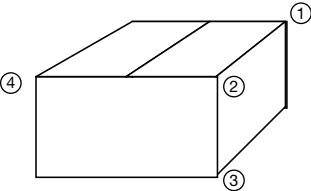Item	Requirement	Test Condition
<b>Package Drop Test</b>	<p>1. No mechanical damage</p> 	<p>Height: 76.0 cm                      10 times: 6 faces-3 edge-1 corner,                      free drop</p>
<b>Package Vibration Test</b>	<p>1. No mechanical damage</p> 	<p>5~150Hz – 1G sweep time                      5 min. each x, y, z axis</p>

## Tape Dimensions

### Embossing 8mm


Unit: mm

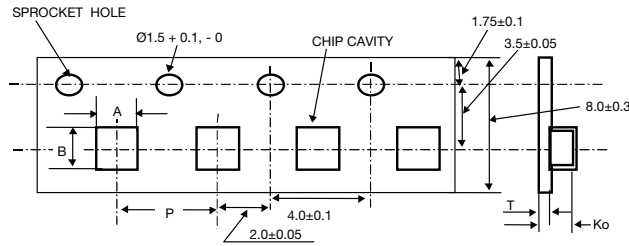

Type	A ± 0.1	B ± 0.1	P ± 0.1	K0 ± 0.1	T (max.)
0603	1.00	1.80	4.0	0.95	0.3
0805	1.45	2.25	4.0	1.00	0.3


## Paper

Unit: mm

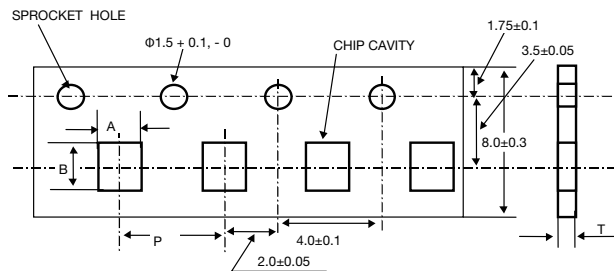


Type	A ± 0.1	B ± 0.1	P ± 0.1	T (max.)
0603	1.00	1.80	2.0	1.1

## Leader and Blank Portion

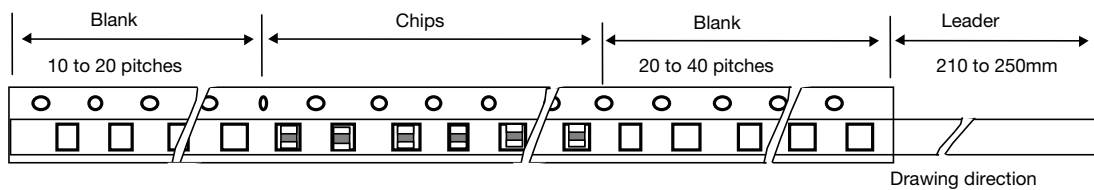


The pitch holes shift within  $\pm 0.3\text{mm}$  for cumulative 10 pitches.

## Reel Dimensions

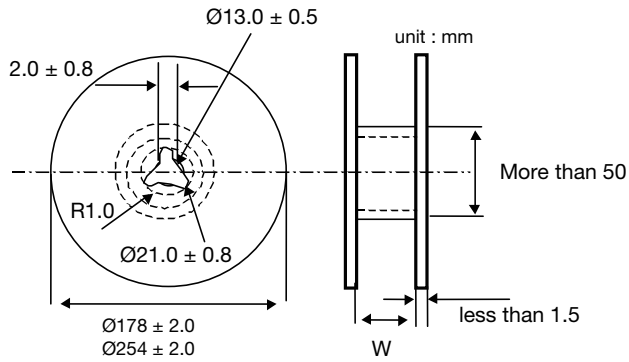

Type	W (mm)
0603, 0805, 1206	$9.0 \pm 0.3$


## Top Cover Tape Strength

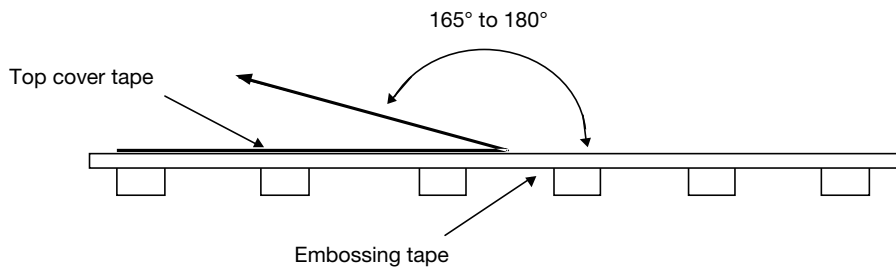


The force for tearing off top cover tape is 20 to 70 grams in the arrow direction.

## Soldering Profile


REFLOW SOLDERING PROFILE (Peak 230°C)

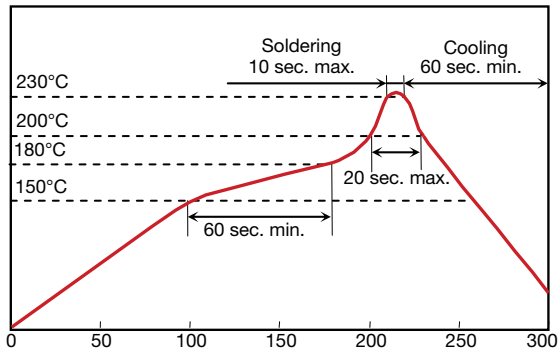


FLOW SOLDERING

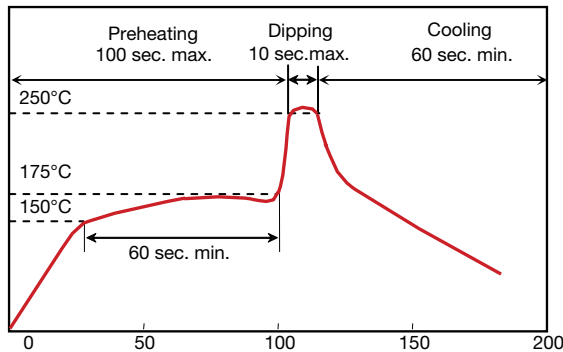

REFLOW SOLDERING PROFILE (Peak 250°C)

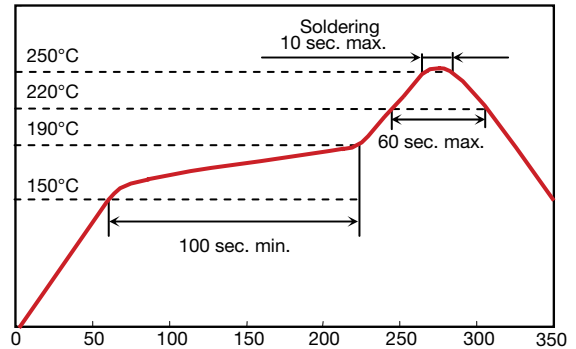

MANUAL SOLDERING

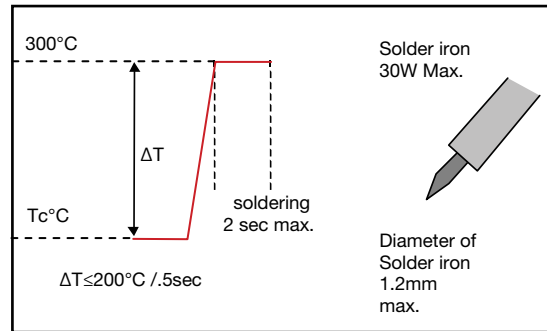

**DISCLAIMER:** The names of the products and the specifications in this catalog are subject to change without notice for the sake of improvement. World Products, LLC also reserves the right to discontinue any of these products. The products in this catalog are intended for use in ordinary electronic products. If any of these products are to be used in special applications requiring extremely high reliability, where product defects might pose a safety risk, please consult World Products, LLC. Though World Products, LLC has taken all possible precautions to ensure the quality and reliability of its products, improper use of products may result in bodily injury, fire, or similar accident. If you have any questions regarding the use of the products in question, please consult World Products, LLC. Please be advised that World Products, LLC accepts no responsibility for any infraction by users of World Products, LLC products on third party patents or industrial copyrights.