
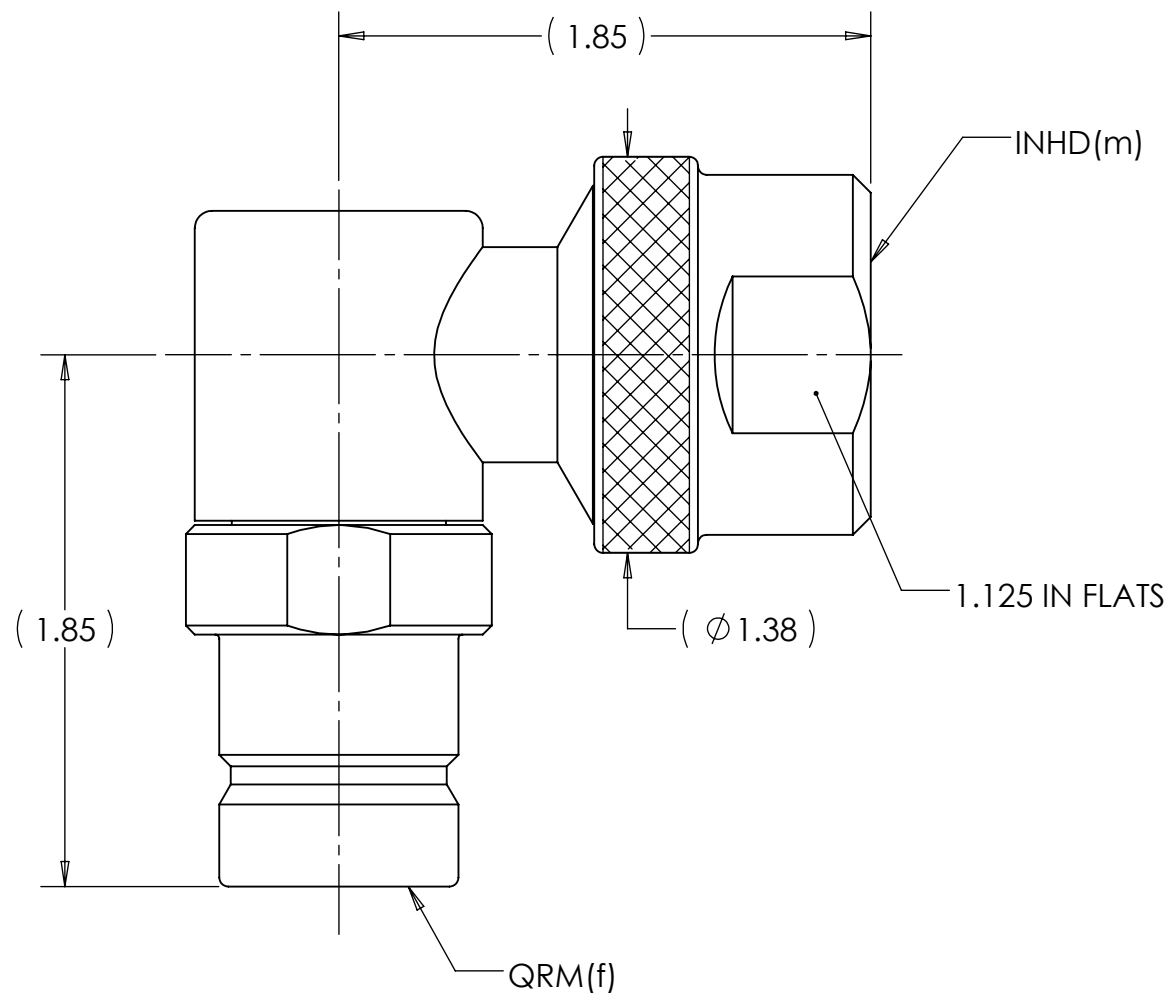


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	01/07/15	AM

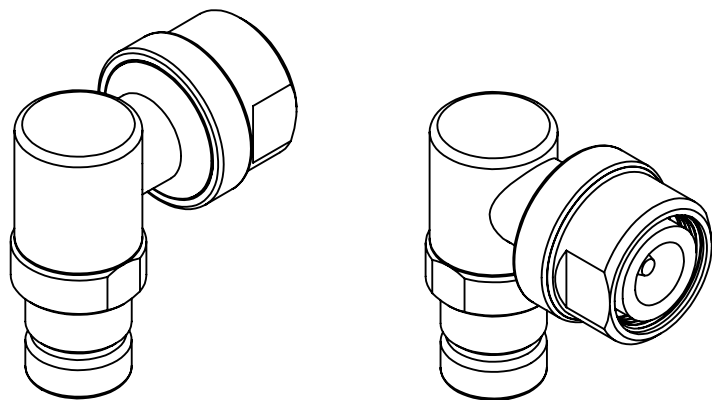

ENGINEERING DATA:


ELECTRICAL:
 IMPEDANCE: 50 OHMS NOMINAL

MECHANICAL:
 INTERFACE: QRM(f) PER TRU SPEC
 INHD(m) PER TRU SPEC

MATERIAL:
 CONTACTS: BRASS & BERYLLIUM COPPER
 INSULATORS: PTFE
 BODIES & COUPLING NUT: STAINLESS STEEL

FINISH:
 CONTACTS: GOLD PLATED
 BODIES & COUPLING NUT: PASSIVATED

- NOTES:**
- UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.
 - INHD(m) MATES WITH TRU HIGH POWER TEST CABLE ASSEMBLY.

MATERIAL	DO NOT SCALE DRAWING	DRAWN AM	DATE 01/06/15	 TRU Corporation 245 Lynnfield St, Peabody, MA 01960
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: $\pm 1/64$.XX : $\pm .01$.XXX: $\pm .005$ ANGLES: $\pm 1/2^\circ$ MACHINED SURFACES: $63/\sqrt{\quad}$	ENG APPR. AM	DATE 01/06/15	
COMMENTS:		THIRD ANGLE PROJECTION	MFG APPR.	DATE
	OTHER APPR.		DATE	DWG. NO. TRU-12863
surface area: sq inch	weight: lbs			CAGE CODE: 92180
				SCALE: 3:2
				SHEET 1 OF 1