Downloaded from Arrow.com.

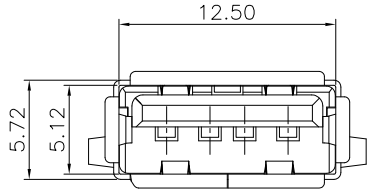



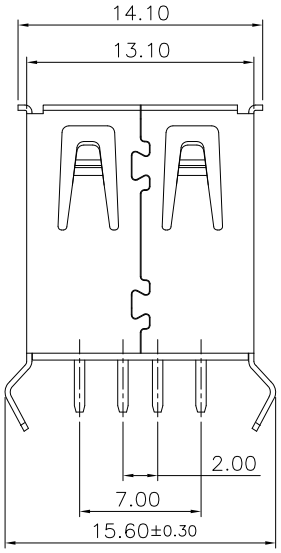

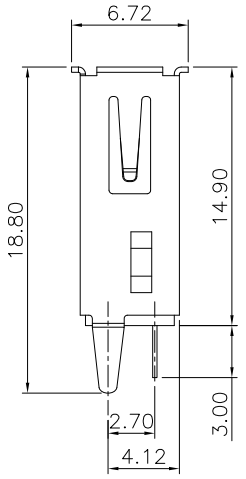



Specifications:
Current Rating:1.0A AC/DC
Voltage Rating:30V AC/DC
Contact Resistance:30m ohm. Max.
Insulation Resistance:1,000M ohm. min.
Withstanding Voltage:500V AC For One Minute
Operating Temperature Range:−40°C ~ +105°C

Material And Finish
Insulator:PBT (UL94V−0)
Contact:Phosphor Bronze
Plating:Gold Plated on Contact Area,
Tin Plated on Solder Tail.
Shell:Brass, Nickel Plated

How To Order
USB−A1VSXX
6:Gold Plated on Contact Area
7:Selective Gold Plated 15u"
8:Selective Gold Plated 30u"
B: Black
W: White

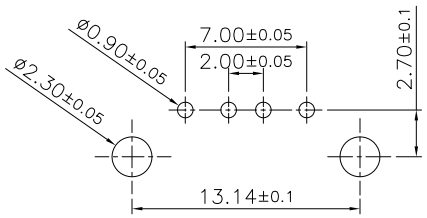

P.C.B Layout

RoHS Compliant

REV	DATE	FILE	BY
F			
E			
D			
C			
B	15−SEP−2021	Change Tray icon	Lisy Liu
A	15−NOV−2018		Jack Huang

DRAWN: Jack Huang
CHECKED: Jerry Chen
APPROVAL: Mike Wu

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.10
UNIT: MM
SCALE: 1:1
SHEET: 1/2
PROJECTION:

ON−SHORE TECHNOLOGY, INC.

DESCRIPTION: USB A Type PCB Socket Top Entery
SIZE
PART NO: USB−A1VSXX