

DOUBLE ROWS-STRAIGHT

SINGLE ROW-STRAIGHT

MATERIAL :

INSULATOR : PBT FILLED,UL 94V-0 RATED (BLACK)

CONTACT MATERIAL : BRASS

PLATING :

CONTACT: GOLD FLASH OVER NICKEL PLATED  
(SHELF LIFE : SIX MONTHS FROM DATE OF MANUFACTURING)

ELECTRICAL CHARACTERISTICS:



CONTACT CURRENT RATING: 1AMPS

DIELECTRIC WITHSTANDING VOLTAGE: 750V AC MIN.

CONTACT RESISTANCE : 30 MILLIOHMS MAX.

INSULATION RESISTANCE : 1000 MEGAOHMS MIN.

TEMPERATURE RATING : -55°C~+105°C

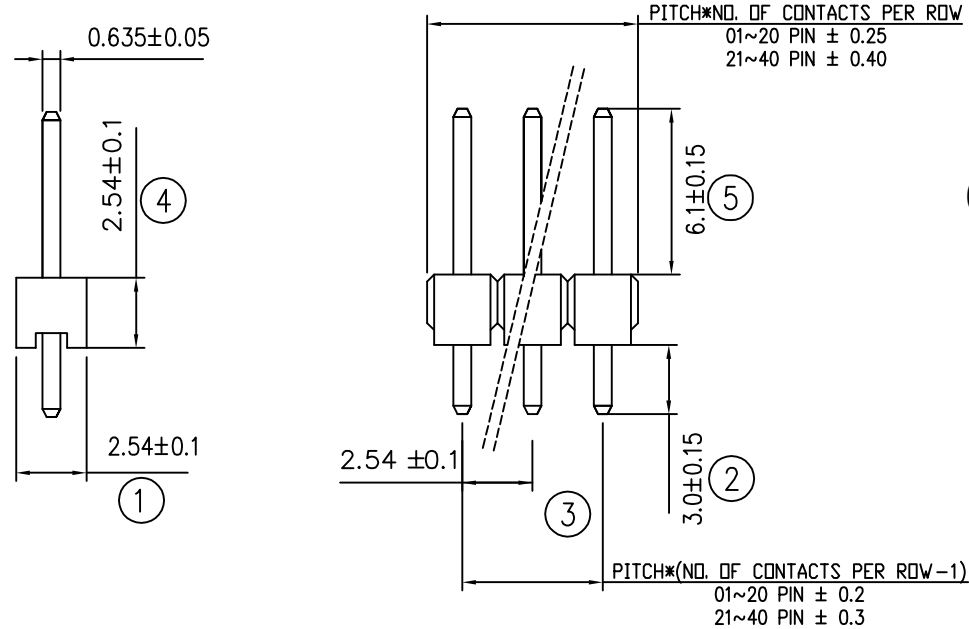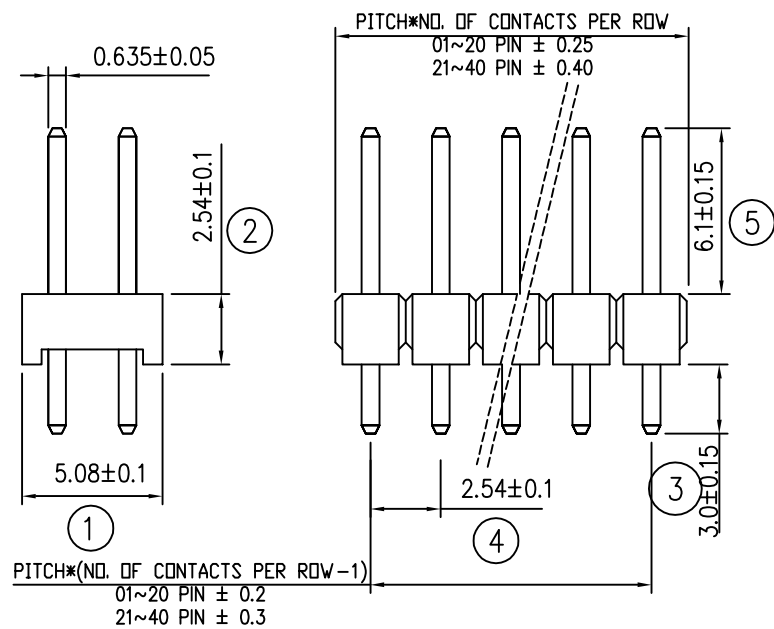

DOUBLE ROWS-RIGHT ANGLE

SINGLE ROW-RIGHT ANGLE

10084678- X XX X LF

BASE NO.

PITCH PIN HEADER  
2.54MM

ROW NO.





1:SINGLE ROW  
2:DOUBLE ROW

PIN OF ONE ROW  
1-40PIN

LEAD FREE

CONTACT TYPE

R:R/A  
S:STRAIGHT

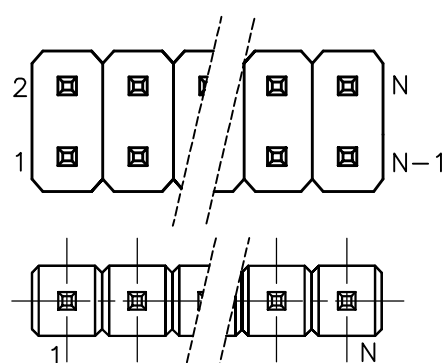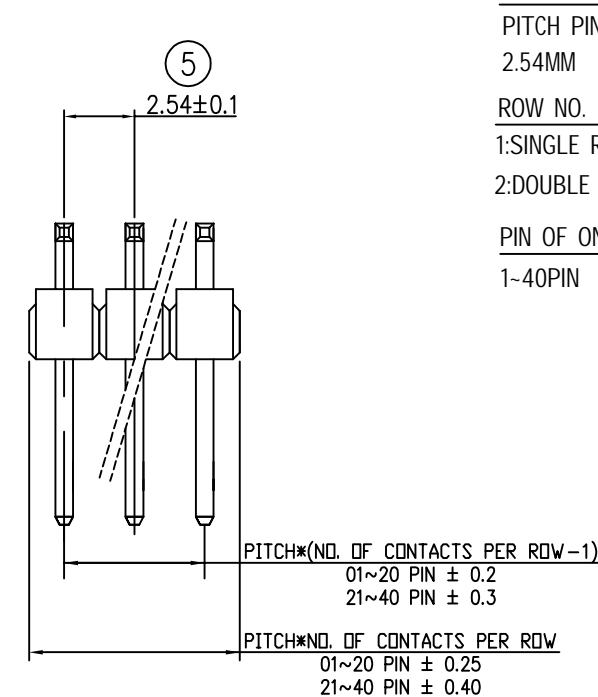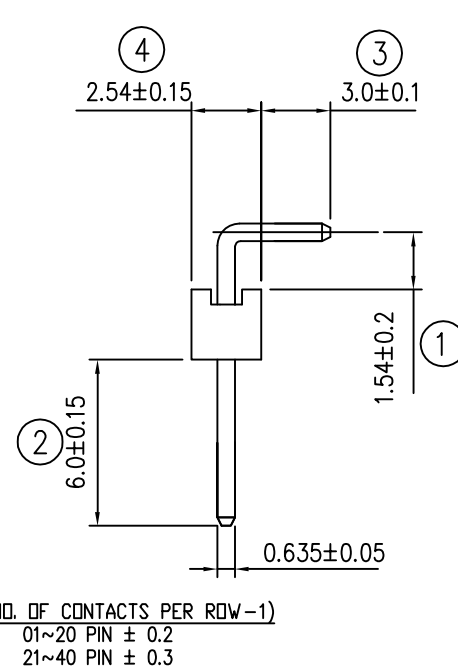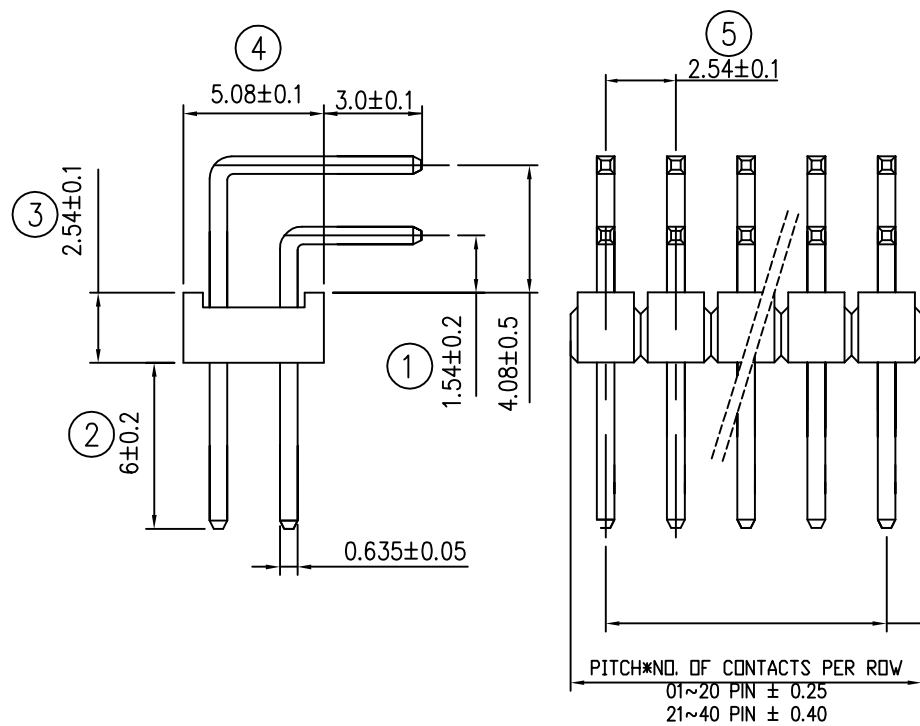

mat'l. code SEE NOTE				surface ISO 1302	tolerance ISO 406 ISO 1101	projection MM	product family			
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM	title			
A	107-0174	MINI	2007-12-17	angles	linear		PH DIP 2.54mm			
B	107-0180	MINI	2007-12-31	±3°			scale -			
C	108-0006	MINI	2008-01-17	dr	MINI K VANDANATH	2007-11-27	dwg no		sheet 1 of 1	size
				enr	ALEX BABU	2007-11-27	10084678		A3	
				chr	ALEX BABU	2008-01-17	type		Product Customer	Drawing
				appd	ALEX BABU	2008-01-17				
sheet index	revision sheet	C	1							