
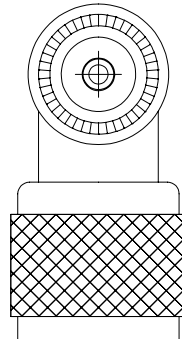


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/22/10	D.GRIFFIN

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATE
CONTACTS	BRASS	GOLD PLATE
INSULATOR	ACETAL	-

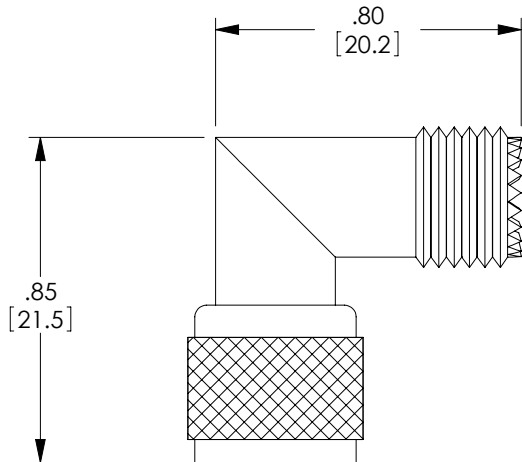

MINI UHF
FEMALE
CONNECTOR

MINI UHF MALE
CONNECTOR

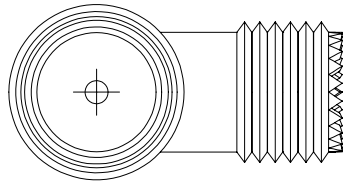

NOTES:

ELECTRICAL:
IMPEDANCE: 50 OHM
FREQUENCY RANGE: DC ~ 2.5 GHz
VOLTAGE RATING: 335 VOLTS PEAK

MISCELLANEOUS:
ALL DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN
ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005 PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	12/16/10		
	CHECKED BY D.PARHAM	12/16/10	CATEGORY COAXIAL	
	APPROVED BY K.BURGNER	12/16/10	PRODUCT DESCRIPTION ADAPTER RA MINI UHF-F/MINI UHF-M	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	DWG. NO. BA470
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: BA470.SLDDRW	REV. A
		SHEET 1 OF 1		