



SURFACE MOUNT SCHOTTKY DIODES


VOLTAGE 20 Volt CURRENT 200 mA

FEATURES

- Very Low VF: 0.32V (Typ) at IF = 1mA
- Low Capacitance: 2.5 pF (Max) at VR=0V
- Extremely Fast Switching Speed
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- Case: SOD-323, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.00014 ounces, 0.0041 grams

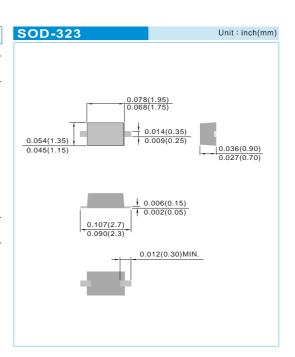

MAXIMUM RATINGS AND ELECTRICAL AHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Parameter	Symbol	Value	Units
Marking Code	-	P70	-
Maximum Reverse Voltage	V _R	20	V
Peak Reverse Voltage	V _{RRM}	20	V
Maximum Forward Current	I _F	0.2	А
Power Dissipation (1)	P _{TOT}	200	mW
Thermal Resistance , Junction to Ambient (1)	$R_{\scriptscriptstyle{ hetaJA}}$	625	°C/W
Junction Temperature Range	T _J	-55 to +150	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

Note:

1. FR-4 Board = $70 \times 60 \times 1$ mm.






ELECTRICAL CHARACTERISTICS (each diode) (T_J = 25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Тур.	Max.	Units
Reverse Breakdown Voltage	V _(BR)	I _R =10μA	20	-	-	V
Reverse Leakage Current	I _R	V _R =10V	-	-	1	μΑ
Forword Voltage	V _F	I _F =1mA	-	-	0.37	V
Total Capacitance	CJ	V _R =1V, f=1MHz	-	-	2.5	pF

ELECTRICAL CHARACTERISTICS CURVE

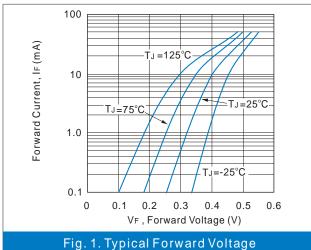


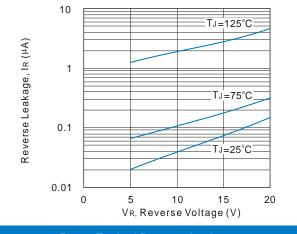



Fig. 2. Typical Reverse Leakage





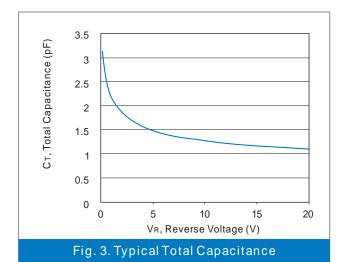

MOUNTING PAD LAYOUT

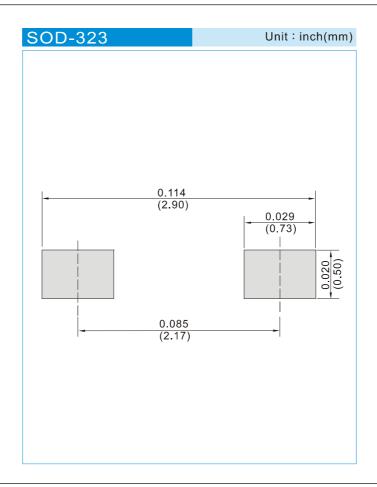

ORDER INFORMATION

• Packing information

T/R - 12K per 13" plastic Reel

T/R - 5K per 7" plastic Reel





Part No_packing code_Version

MMBD717WS_R1_00001 MMBD717WS_R2_00001

For example : RB500V-40_R2_00001 Part No. Serial number Version code means HF Packing size code means 13" Packing type means T/R

Packing Code XX			Version Code XXXXX			
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	В	13"	2			
Tube Packing (T/P)	Т	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
 of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
 Customers are responsible in comprehending the suitable use in particular applications.
 Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panjit:

MMBD717WS_R1_10001 MMBD717WS_R2_10001 MMBD717WS_R2_00001