| REVISIONS | | |
|---|---|---|
| ISS | ZONE | DESCRIPTION\PER REQUEST\DATE |
| | | |

- CABLES: RG-59B/U
  KX 6A
- FERRULE CRIMPING TOOLS P/N
  227-944 (M22520/5-01)
  227-1221-19A (M22520/5-19A) HEX: 6.47 L=10.16
- INNER CONTACT CRIMPING TOOL P/N
  413 SP 00 ADJUST TO 6
- PACKAGING IN BAG WITH COMMERCIAL PART NUMBER AND DATE CODE
- CONNECTOR ACCORDING TO NFC 93-570, DIN 47-295, CEI 169-13

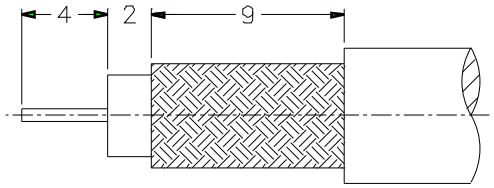


RECOMMENDED
CABLE STRIPPING DIM'S




RECOMMENDED
MOUNTING HOLE

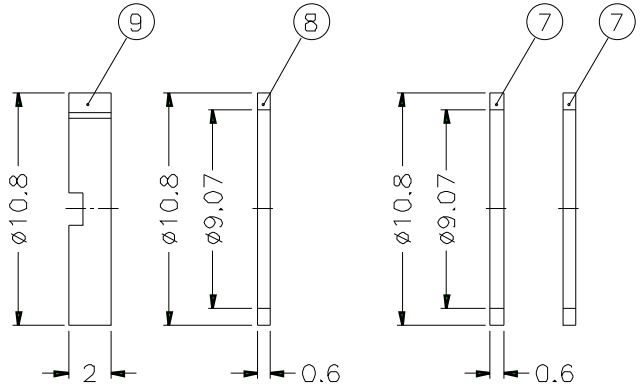


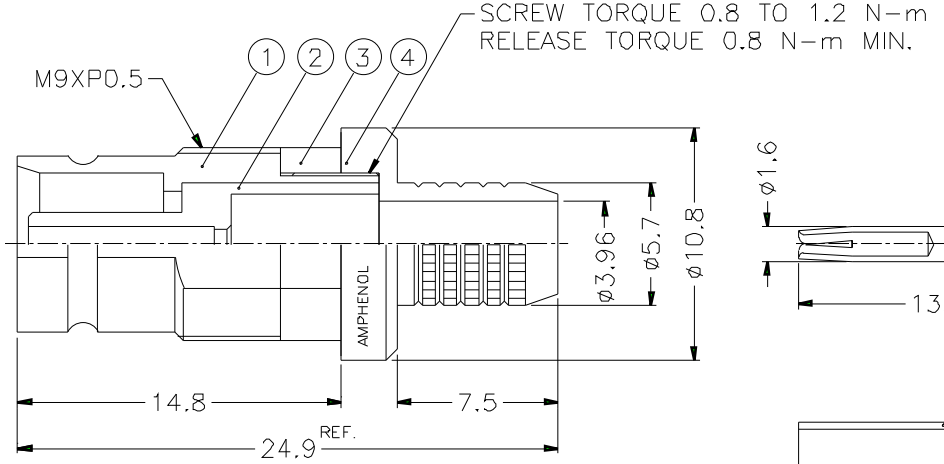


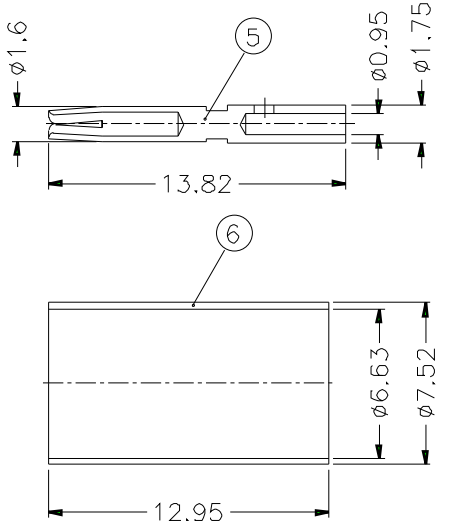


PANEL THICKNESS:
1. 1.2mm(GROUNDED OR ISOLATED)
2. 3mm(ONLY GROUNDED, WITHOUT WASHERS ⑦ AND ⑧ )

| NO. | DESCRIPTION | MATERIAL | FINISH | Q'TY | DRAWING NO. |
|---|---|---|---|---|---|
| 9 | NUT | BRASS | NICKEL | 1 | |
| 8 | WASHER | BRASS | NICKEL | 1 | |
| 7 | ISOLATING WASHER | EPOXY GLASS -FR4 TYPE | NATURAL | 2 | |
| 6 | FERRULE | COPPER | NICKEL | 1 | |
| 5 | CONTACT PIN | BECU | GOLD | 1 | |
| 4 | BARREL | BRASS | NICKEL | 1 | |
| 3 | RING | PSU,20% G.F. | GREEN | 1 | |
| 2 | INSULATOR | TEFLON | NATURAL | 1 | |
| 1 | BODY | BRASS | GOLD | 1 | |

DIMENSIONS ARE IN MILLIMETERS

SCALE 3/1 ISSUE A

PART NO. 156 931 05

APPROVED DATE 10-11-01'

CHECKED DATE 10-11-01'

DRAWN DATE 10-11-01'

FILE NO.

**Amphenol**

TITLE
1.6/5.6 75Ω BULKHEAD MOUNT JACK

DRAWING NO.

ITEM NO.