


6 PIN DIP ZERO CROSS TRIAC PHOTOCOUPLER

Features:

- Peak breakdown voltage
 - 250V, EL303x
 - 400V, EL304x
 - 600V, EL306x
 - 800V, EL308x
- High isolation voltage between input and output (Viso=5000 V rms)
- Zero voltage crossing
- Pb free and RoHS compliant.
- UL approved (No. E214129)
- VDE approval (pending)
- SEMKO approval (pending)
- NEMKO approval (pending)
- DEMKO approval (pending)
- FIMKO approval (pending)
- CSA approval (pending)

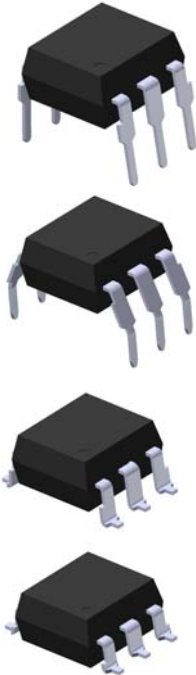

Description


The EL303x, EL304x, EL306x and EL308x series devices consist of a GaAs infrared emitting diode optically coupled to a monolithic silicon a zero voltage crossing photo triac.

They are designed for use with a discrete power triac in the interface of logic systems to equipment powered from 110 to 240 VAC lines, such as solid-state relays, industrial controls, motors, solenoids and consumer appliances, etc.

Applications

- Solenoid/valve controls
- Light controls
- Static power switch
- AC motor drivers
- E.M. contactors
- Temperature controls
- AC Motor starters
- Solid state relays

Schematic



Pin Configuration

- 1. Anode
- 2. Cathode
- 3. No Connection
- 4. Terminal
- 5. No Connection
- 6. Terminal



LIGHTING FOREVER

EL303x Series
EL304x Series
EL306x Series
EL308x Series

6 PIN DIP ZERO CROSS TRIAC PHOTOCOUPLER

Absolute Maximum Ratings (T_a=25°C)

Parameter		Symbol	Rating	Unit	
Input	Forward current	I _F	60	mA	
	Reverse voltage	V _R	6	V	
	Power dissipation	P _D	100	mW	
Output	Off-state Output Terminal Voltage	V _{DRM}	EL303x	250	V
			EL304x	400	
			EL306x	600	
			EL308x	800	
	Peak Repetitive Surge Current	I _{TSM}	1	A	
Power dissipation		P _D	300	mW	
Isolation voltage ^{*1}		V _{iso}	5000	V rms	
Total power dissipation		P _D	330	mW	
Operating temperature		T _{opr}	-55~+100	°C	
Storage temperature		T _{stg}	-55~+125	°C	
Soldering temperature ^{*2}		T _{sol}	260	°C	

Notes

*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2 & 3 are shorted together, and pins 4, 5 & 6 are shorted together.

*2 For 10 seconds.



LIGHTING FOREVER

EL303x Series
EL304x Series
EL306x Series
EL308x Series

6 PIN DIP ZERO CROSS TRIAC PHOTOCOUPLER

Electrical Characteristics (T_a=25°C unless specified otherwise)

Input

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Forward voltage	V _F	-	1.27	1.5	V	I _F = 30mA
Reverse Leakage current	I _R	-	-	10	μA	V _R = 6V

Output

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Peak Blocking Current	EL303x/304x	-	-	100	nA	V _{DRM} = Rated V _{DRM} I _F = 0mA
	EL306x/308x			500		
Peak On-state Voltage	V _{TM}	-	-	3	V	I _{TM} =100mA peak, I _F =Rated I _{FT}
Critical Rate of Rise off-state Voltage	dv/dt	600	-	-	V/μs	Fig.
Inhibit Voltage (Thermal voltage above which device will not trigger)	V _{INH}	-	-	20	V	I _F = Rated I _{FT}
Leakage in Inhibited State	I _{DRM2}	-	-	500	μA	I _F = Rated I _{FT} , V _{DRM} =Rated V _{DRM} , off state

Transfer Characteristics

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition				
LED Trigger Current	EL3031 EL3041 EL3061 EL3081	-	-	15	mA	Main terminal Voltage=3V				
	EL3032 EL3042 EL3062 EL3082			10						
	EL3033 EL3043 EL3063 EL3083			5						
	Holding Current			I _H			-	250	-	μA

* Typical values at T_a = 25°C

**6 PIN DIP ZERO CROSS TRIAC
PHOTOCOUPLER**

Typical Performance Curves

Figure 1. Forward Current vs Forward Voltage

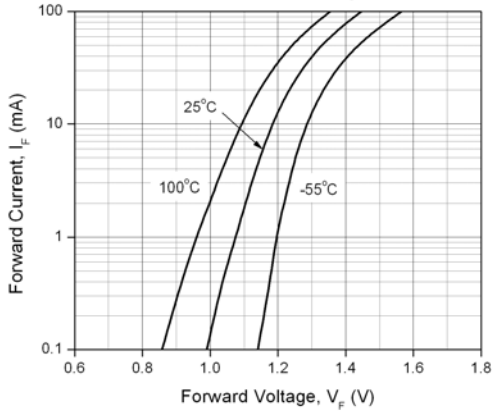


Figure 2. On-State Characteristics

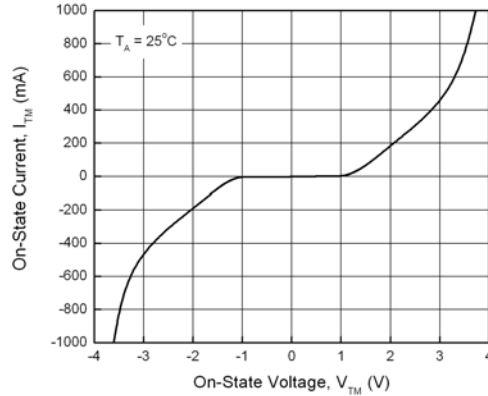


Figure 3. Holding Current vs. Ambient Temperature

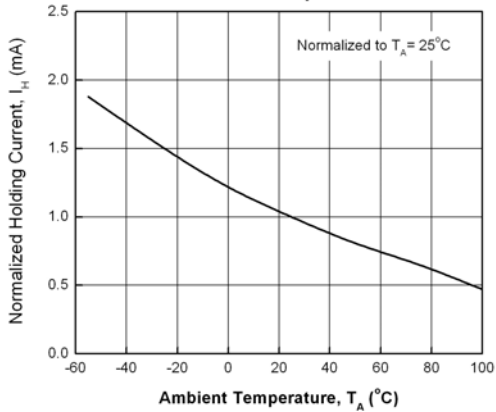


Figure 4. LED Current Required to Trigger vs. LED Pulse Width

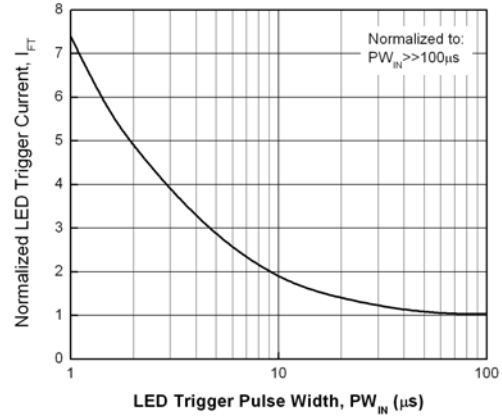


Figure 5. Leakage Current vs. Ambient Temperature


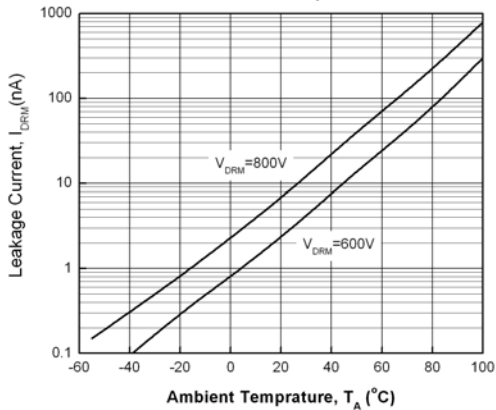


Figure 6. LED Trigger Current vs. Ambient Temperature

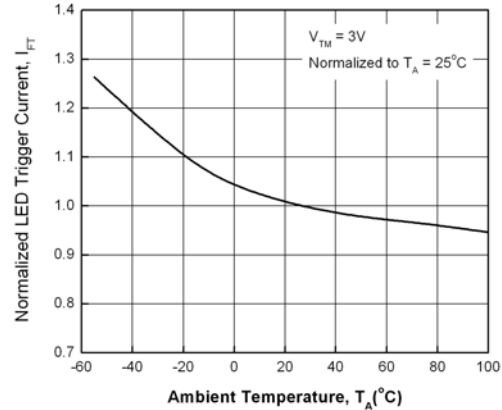

**6 PIN DIP ZERO CROSS TRIAC
PHOTOCOUPLER**

**EL303x Series
EL304x Series
EL306x Series
EL308x Series**

Figure 7. Off-State Output Terminal Voltage vs. Ambient Temperature

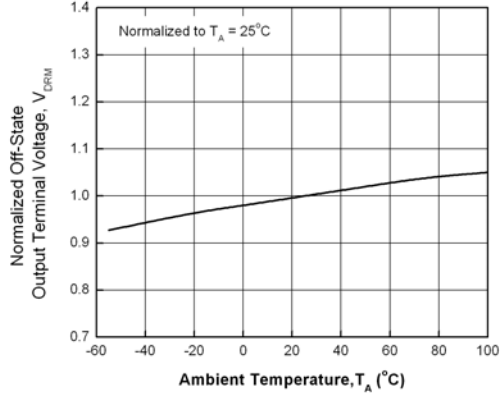


Figure 8. Leakage in Inhibit State vs. Ambient Temperature


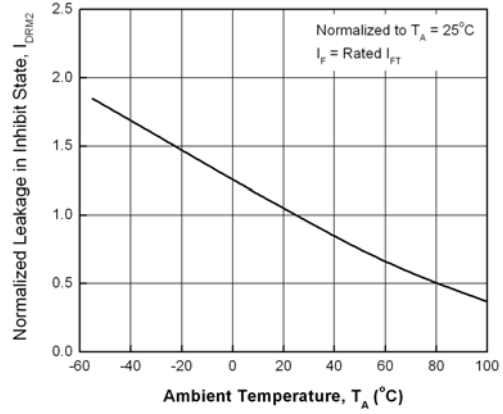


Figure 9. Inhibit Voltage vs. Ambient Temperature



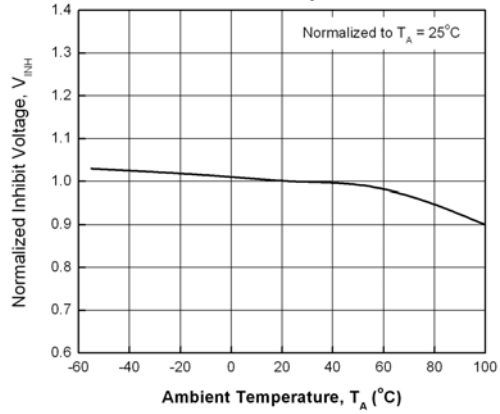

LIGHTING FOREVER

EL303x Series
EL304x Series
EL306x Series
EL308x Series

6 PIN DIP ZERO CROSS TRIAC PHOTOCOUPLER

Order Information

Part Number

EL303XY(Z)-V
or **EL304XY(Z)-V**
or **EL306XY(Z)-V**
or **EL308XY(Z)-V**

Note

X = Part No. (1 for $I_{FT}=15mA$, 2 for $I_{FT}=10mA$, 3 for $I_{FT}=5mA$)

Y = Lead form option (S, S1, M or none)

Z = Tape and reel option (TA, TB or none).


V = VDE safety approved option

Option	Description	Packing quantity
None	Standard DIP-6	65 units per tube
M	Wide lead bend (0.4 inch spacing)	65 units per tube
S (TA)	Surface mount lead form + TA tape & reel option	1000 units per reel
S (TB)	Surface mount lead form + TB tape & reel option	1000 units per reel
S1 (TA)	Surface mount lead form (low profile) + TA tape & reel option	1000 units per reel
S1 (TB)	Surface mount lead form (low profile) + TB tape & reel option	1000 units per reel


**6 PIN DIP ZERO CROSS TRIAC
PHOTOCOUPLER**

Package Drawings
(Dimensions in mm)

Standard DIP Type

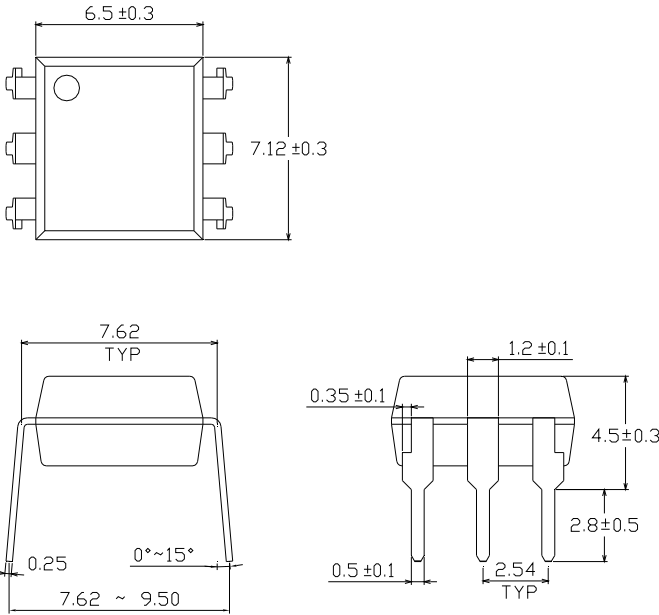


Option M Type

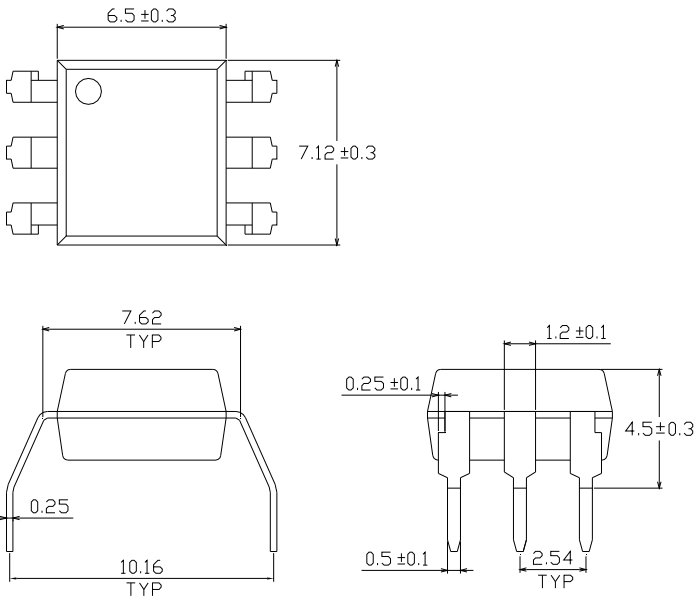


**6 PIN DIP ZERO CROSS TRIAC
PHOTOCOUPLER**

Option S Type

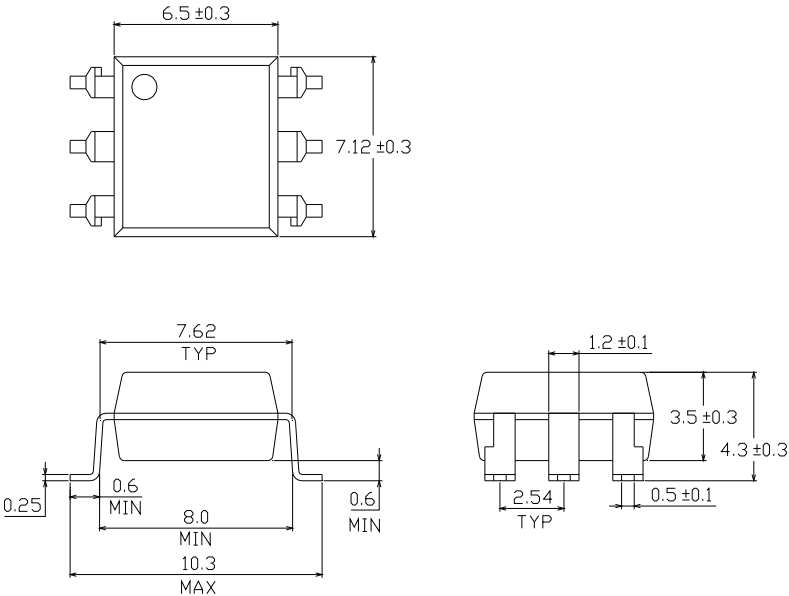


Option S1 Type

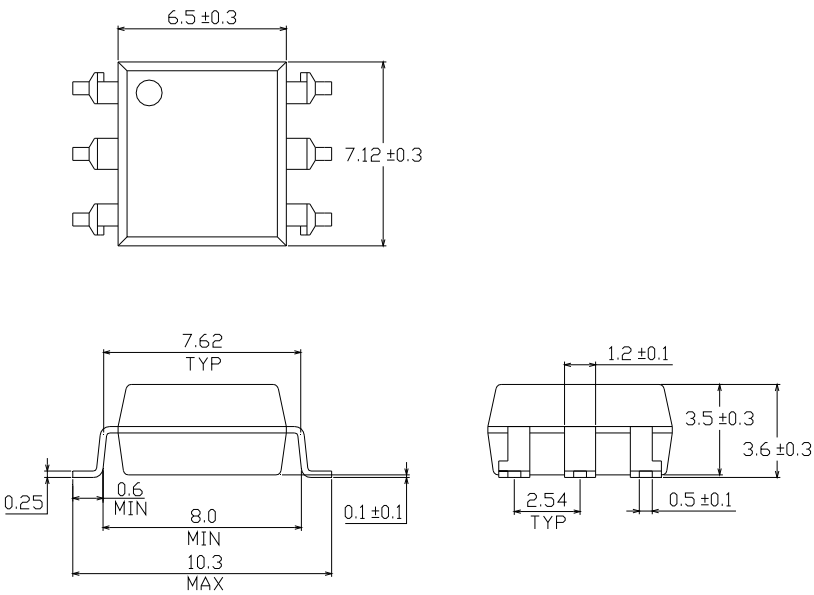


**6 PIN DIP ZERO CROSS TRIAC
PHOTOCOUPLER**

Recommended pad layout for surface mount leadform

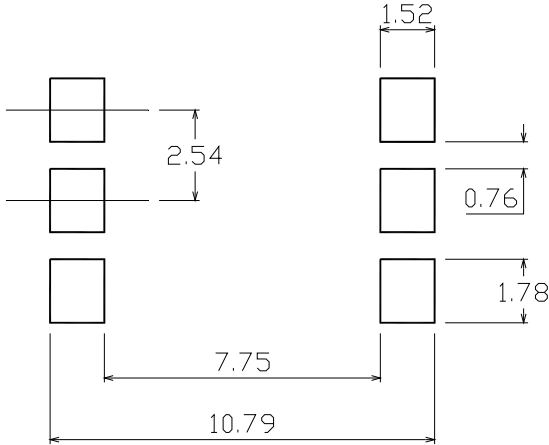

Device Marking

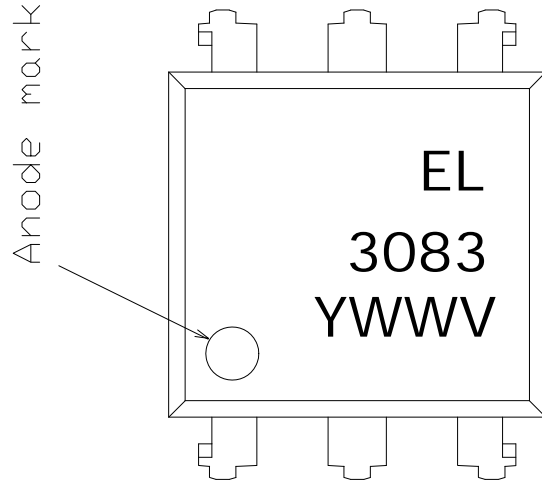


Notes

- EL denotes Everlight
- 3083 denotes Device Number
- Y denotes 1 digit Year code
- WW denotes 2 digit Week code
- V denotes VDE (optional)


**6 PIN DIP ZERO CROSS TRIAC
PHOTOCOUPLER**

Tape & Reel Packing Specifications


Option TA

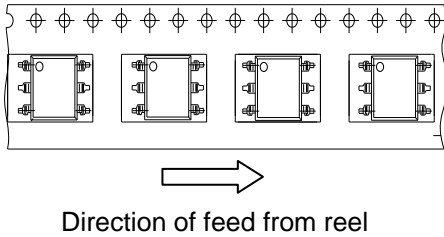

Option TB

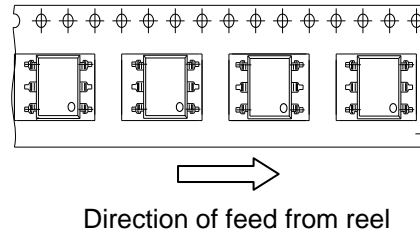

Tape dimensions

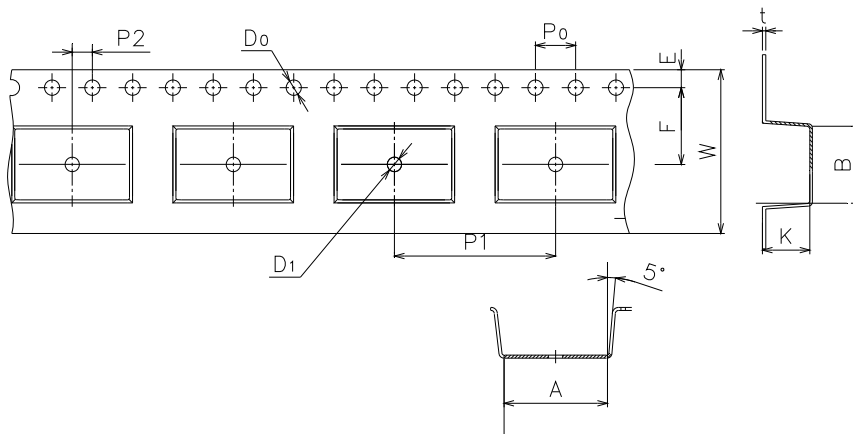


Dimension No.	A	B	Do	D1	E	F
Dimension (mm)	10.4±0.1	7.52±0.1	1.5±0.1	1.5+0.1/-0	1.75±0.1	7.5±0.1

Dimension No.	Po	P1	P2	t	W	K
Dimension (mm)	4.0±0.15	1.6±0.1	2.0±0.1	0.35±0.03	16.0±0.2	4.5±0.1

**6 PIN DIP ZERO CROSS TRIAC
PHOTOCOUPLER**

Solder Reflow Temperature Profile

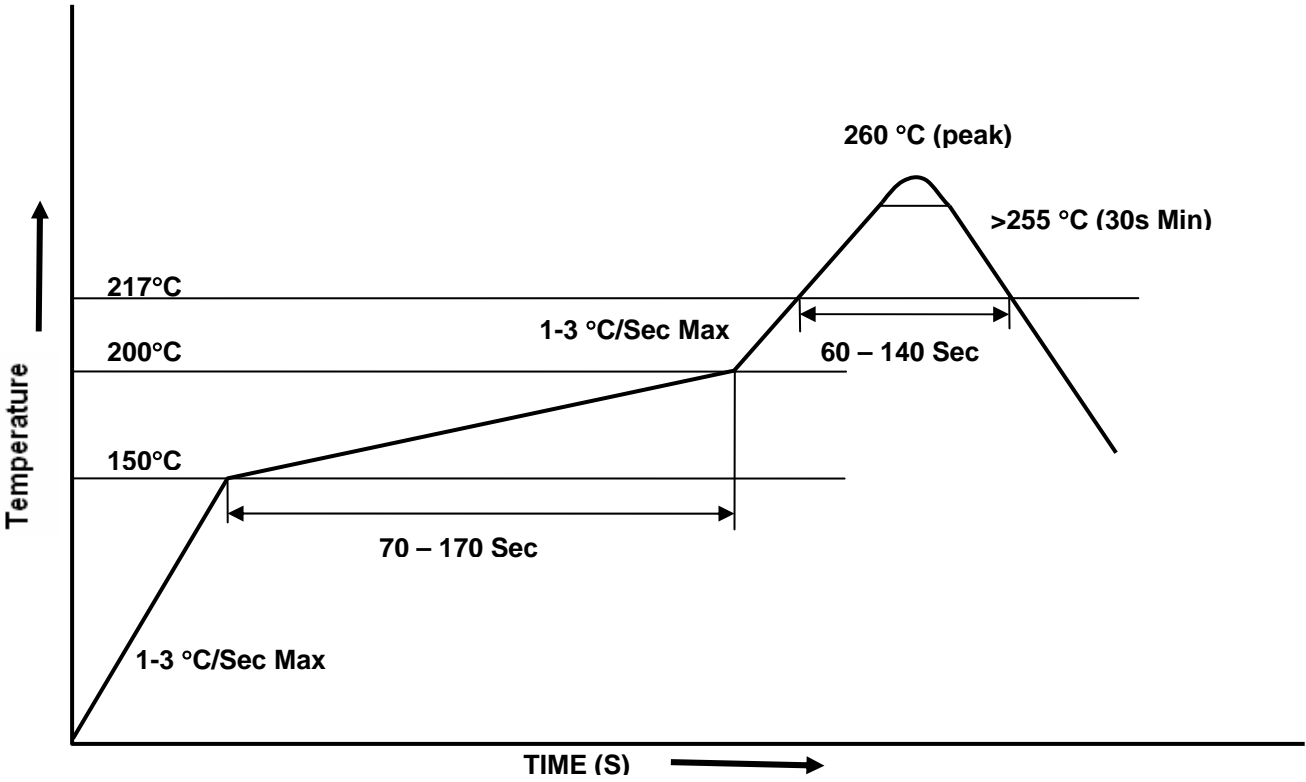



LIGHTING FOREVER

6 PIN DIP ZERO CROSS TRIAC PHOTOCOUPLER

EL303x Series
EL304x Series
EL306x Series
EL308x Series

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.