

FEATURES


- 72-pin industry standard four-byte single-in-line memory module
- JEDEC compliant: 21-C, Fig. 4-6
: No. 95 MO-116
- Supports 90°, 40° and 22.5° connectors
- High performance, CMOS
- Single 3.3 ± 0.3V power supply
- LVTTTL-compatible inputs and outputs
- Fast Page Mode access cycle
- Refresh modes: RAS-ONLY, CAS-BEFORE-RAS, HIDDEN
- Refresh: 4096 refresh cycles every 64 ms
- Dimensions: 4.25" (length) x 1.50" (height) x 0.354" (max thickness)


PERFORMANCE RANGE

SYMBOL	PARAMETER	Rating	
		60 ns	70 ns
t _{RAC}	RAS Access Time	60 ns (max)	70 ns (max)
t _{CAC}	CAS Access Time	15 ns (max)	20 ns (max)
t _{AA}	Access Time from Column Address	30 ns (max)	35 ns (max)
t _{RC}	Random Read or Write Cycle Time	110 ns (min)	130 ns (min)
t _{PC}	Fast Page Mode Cycle Time	40 ns (min)	45 ns (min)

ORDERING INFORMATION

DESCRIPTION	PART NUMBER	ENGINEERING DESCRIPTOR
16M x 36, 60 ns, Tin/Lead Tabs	20147C	CL001D16360BB0L-60
16M x 36, 70 ns, Tin/Lead Tabs	20150C	CL001D16360BB0L-70



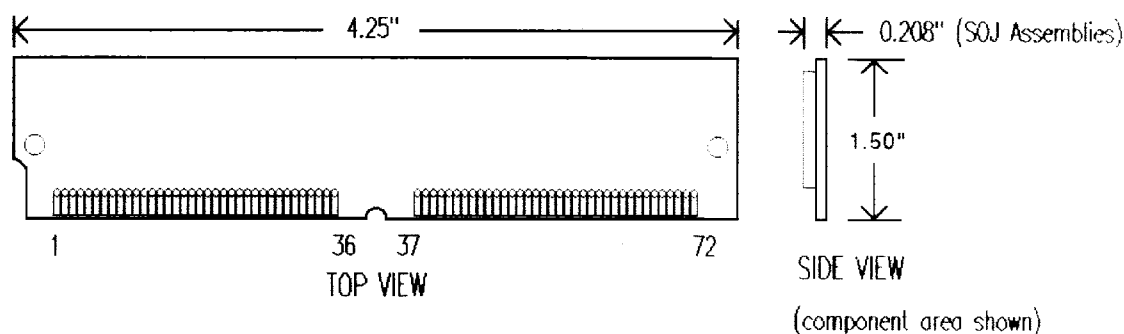CARD OUTLINE

GENERAL DESCRIPTION

The 16M x 36 SIMM uses dynamic RAM devices and is designed for use as a general-purpose four-byte wide memory assembly with eight data bits per byte. The SIMM is populated with eight 16Mx4 DRAMs and four 16Mx1 DRAMs.

Presence Detect (PD) bits provide information about SIMM density, addressing, performance and features.

During Read or Write Cycles, each byte may be uniquely addressed via 24 address bits, with the first 12 bits (A0~A11) latched on RAS and the latter 12 bits (A0~A11) latched on CAS. READ or WRITE cycles are selected with the WE input, with a logic low indicating a WRITE cycle and a logic HIGH indicating a READ cycle. During a WRITE cycle, data-in is latched by the falling edge of WE or CAS, whichever occurs last.

FAST PAGE MODE operation allows for faster READs or WRITEs within a row-address-defined page boundary. A FAST PAGE MODE cycle is initiated with RAS followed by CAS, then strobing CAS to latch different column addresses while holding RAS LOW.

Returning RAS and CAS high terminates a memory cycle and returns the DRAMs to a reduced-current STANDBY state.

Memory cell data is retained in its correct state by maintaining power and executing any RAS cycle (READ, WRITE) or RAS refresh cycle (RAS-ONLY, CBR, or HIDDEN) so that all 4096 combinations of RAS addresses (A0~A11) are executed at least every 64 ms. The CBR refresh and HIDDEN refresh cycles will invoke the on-chip refresh address counters for automatic RAS addressing.

PIN DESCRIPTION


RAS0,RAS2	Row Address Strobe
CAS0~CAS3	Column Address Strobe
WE	Write Enable
A0~A11	Address Inputs
DQ0~7,DQ9~16, DQ18~25,DQ27~34	Data In/Out
DQ8,17,26,35	Parity In/Out
VCC	Power (+3.3V)
VSS	Ground
NC	No Connection
PD1~4	Presence Detects

PRESENCE DETECT

PIN SYMBOL	CONFIGURATION	
	60 ns	70 ns
PD1	VSS	VSS
PD2	NC	NC
PD3	NC	VSS
PD4	NC	NC

PIN CONFIGURATION

#	Name	#	Name	#	Name	#	Name	#	Name	#	Name
1	VSS	13	A1	25	DQ24	37	DQ17	49	DQ9	61	DQ14
2	DQ0	14	A2	26	DQ7	38	DQ35	50	DQ27	62	DQ33
3	DQ18	15	A3	27	DQ25	39	VSS	51	DQ10	63	DQ15
4	DQ1	16	A4	28	A7	40	CAS0	52	DQ28	64	DQ34
5	DQ19	17	A5	29	A11	41	CAS2	53	DQ11	65	DQ16
6	DQ2	18	A6	30	VCC	42	CAS3	54	DQ29	66	NC
7	DQ20	19	A10	31	A8	43	CAS1	55	DQ12	67	PD1
8	DQ3	20	DQ4	32	A9	44	RAS0	56	DQ30	68	PD2
9	DQ21	21	DQ22	33	NC	45	NC	57	DQ13	69	PD3
10	VCC	22	DQ5	34	RAS2	46	NC	58	DQ31	70	PD4
11	NC	23	DQ23	35	DQ26	47	WE	59	VCC	71	NC
12	A0	24	DQ6	36	DQ8	48	NC	60	DQ32	72	VSS

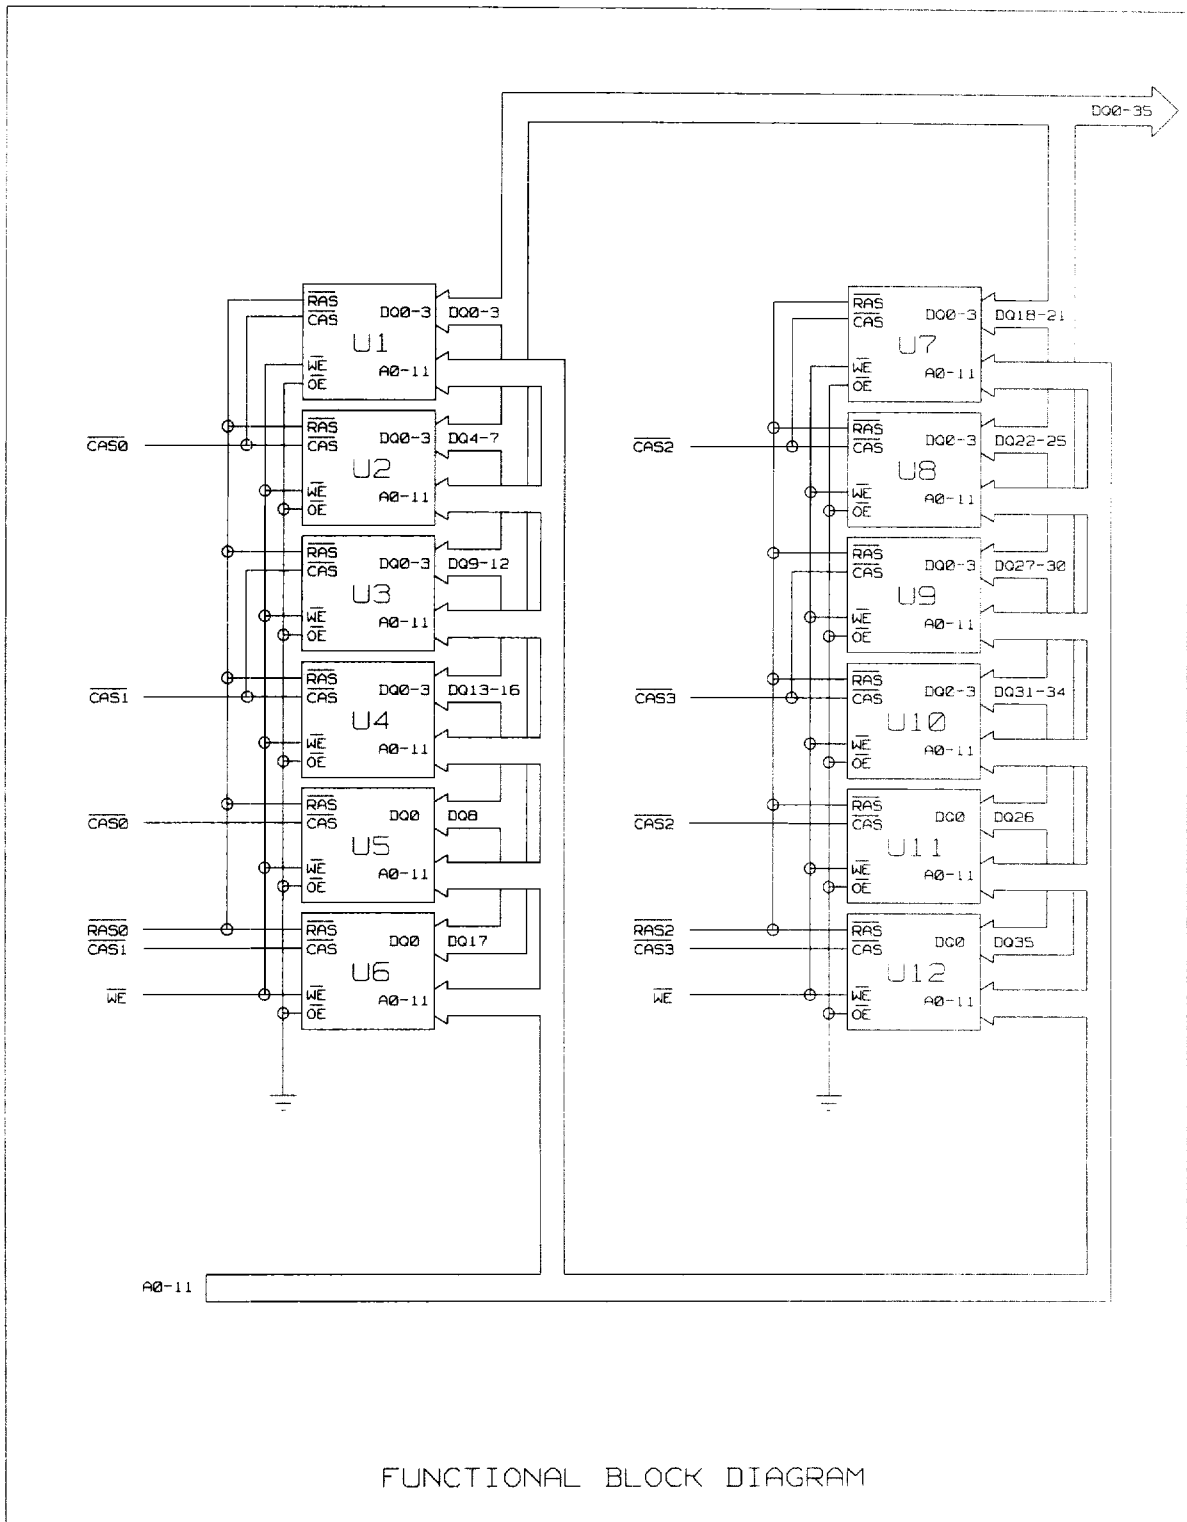

TRUTH TABLE

FUNCTION		RAS	CAS	WE	ROW ADDR	COL ADDR	DATA IN/OUT
Standby		H	H-X	X	X	X	Hi-Z
Read		L	L	H	ROW	COL	Valid D _{OUT}
Early-Write		L	L	L	ROW	COL	Valid D _{IN}
Fast Page Mode-Read	1st Cycle	L	H-L	H	ROW	COL	Valid D _{OUT}
	2nd Cycle	L	H-L	H	N/A	COL	Valid D _{OUT}
Fast Page Mode-Write	1st Cycle	L	H-L	L	ROW	COL	Valid D _{IN}
	2nd Cycle	L	H-L	L	N/A	COL	Valid D _{IN}
RAS-Only Refresh		L	H	X	ROW	N/A	Hi-Z
Hidden Refresh	Read	L-H-L	L	H	ROW	COL	Valid D _{OUT}
	Write	L-H-L	L	L	ROW	COL	Valid D _{IN}
CAS-Before-RAS Refresh		H-L	L	H	X	X	Hi-Z

X:"H" or "L" D_{IN}:Data In D_{OUT}:Data Out Hi-Z:High Impedance N/A:Not Applicable

ABSOLUTE MAXIMUM RATINGS (Note 1,22)

SYMBOL	PARAMETER	RATING	UNITS	NOTES
V _{CC}	Power Supply Voltage	-0.5 to 4.6	V	2
V _{IN}	Voltage on any Pin Relative to V _{SS}	-0.5 to 4.6	V	2
V _{OUT}		-0.5 to 4.6	V	2
T _{opr}	Operating Temperature	0 to 70	°C	
T _{stg}	Storage Temperature	-55 to 150	°C	
P _D	Power Dissipation	12.0	W	17,31
I _{OS}	Short Circuit Output Current	50	mA	17

RECOMMENDED OPERATING CONDITIONS ($T_A = 0$ to 70 °C) (Note 2)

SYMBOL	PARAMETER	MIN.	TYP.	MAX.	UNITS	NOTES
V_{CC}	Supply Voltage	3	3.3	3.6	V	
V_{SS}	Ground	0	0	0	V	
V_{IH}	Input High Voltage	2		$V_{CC} + 0.3$	V	22
V_{IL}	Input Low Voltage	-0.3		0.8	V	22

 T_A : Ambient temperature

CAPACITANCE ($f = 1$ MHz; $T_A = 25$ °C) (Note 22)

SYMBOL	PARAMETER	MAX.	UNITS	NOTES
C_{I1}	Input Capacitance (A0-A11)	60	pF	
C_{I2}	Input Capacitance (RAS0,RAS2)	42	pF	
C_{I3}	Input Capacitance (CAS0~CAS3)	21	pF	
C_{I4}	Input Capacitance (WE)	84	pF	
C_{O1}	Output Capacitance (Data In/Out)	7	pF	

 T_A : Ambient temperature

DC CHARACTERISTICS

(Recommended operating conditions unless otherwise noted.) (Note 18,22)

SYMBOL	PARAMETER	SPEED	MIN.	MAX.	NOTES
I_{CC1}	OPERATING CURRENT: Average Power Supply Operating Current (RAS,CAS, Address Cycling @ $t_{RC} = t_{RC(min)}$, $V_{CC} = V_{CC(max)}$) (mA)	60 ns	-	1400	3,4,5,6, 16
		70 ns	-	1280	
I_{CC2}	STANDBY CURRENT (TTL): Power Supply Standby Current (RAS=CAS=Vcc, Data out is disabled (Hi-Z), all other inputs =Vcc, $V_{CC} = V_{CC(max)}$) (mA)	Don't Care	-	16	
I_{CC3}	RAS-ONLY REFRESH CURRENT: Average Power Supply Current, RAS-Only Mode (RAS, Address Cycling, CAS=V _{IH} @ $t_{RC} = t_{RC(min)}$, $V_{CC} = V_{CC(max)}$) (mA)	60 ns	-	1400	3,4,5,6,16, 31
		70 ns	-	1280	
I_{CC4}	FAST PAGE MODE CURRENT: Average Power Supply Current, FPM (RAS=V _{IL} , CAS, Address Cycling @ $t_{PC} = t_{PC(min)}$, $V_{CC} = V_{CC(max)}$) (mA)	60 ns	-	800	3,4,5,7,16
		70 ns	-	720	
I_{CC5}	STANDBY CURRENT (CMOS): Power Supply Standby Current (RAS=CAS=V _{CC} -0.2V, Data Out is disabled (Hi-Z), $V_{CC} = V_{CC(max)}$) (mA)	Don't Care	-	5	
I_{CC6}	CAS-BEFORE-RAS, REFRESH CURRENT: Average Power Supply Current, CAS-Before-RAS Mode (RAS,CAS Cycling @ $t_{RC} = t_{RC(min)}$, $V_{CC} = V_{CC(max)}$) (mA)	60 ns	-	1400	3,4,5,6,16, 31
		70 ns	-	1280	
I_{LI}	INPUT LEAKAGE CURRENT: Input Leakage Current, any input ($0 \leq V_{IN} \leq V_{CC}$, all other pins not under test=0V, $V_{CC} = V_{CC(max)}$) (μ A)	A0-A11	-60	60	
		RAS0,RAS2	-30	30	
		CAS0-CAS3	-15	15	
		WE	-60	60	
I_{LO}	OUTPUT LEAKAGE CURRENT: (Data Out is disabled (Hi-Z), $0 \leq V_{OUT} \leq V_{CC}$) (μ A)		-5	5	
V_{OH}	OUTPUT HIGH LEVEL: Output "H" Level Voltage ($I_{OUT} = -5mA$) (V)		2.4	-	2
V_{OL}	OUTPUT LOW LEVEL: Output "L" Level Voltage ($I_{OUT} = +4.2mA$) (V)		-	0.4	2

AC CHARACTERISTICS
READ, WRITE, AND REFRESH CYCLES (COMMON PARAMETERS)

(Recommended operating conditions unless otherwise noted.) (Note 8,18)

SYMBOL	PARAMETER	60 ns		70 ns		NOTES
		MIN.	MAX.	MIN.	MAX.	
t_{RC}	Random READ or WRITE Cycle Time (ns)	110	-	130	-	
t_{RP}	RAS Precharge Time (ns)	40	-	50	-	
t_{CP}	CAS Precharge Time (ns)	10	-	10	-	
t_{RAS}	RAS Pulse Width (ns)	60	10000	70	10000	23
t_{CAS}	CAS Pulse Width (ns)	15	10000	20	10000	23
t_{ASR}	Row Address Setup Time (ns)	0	-	0	-	22
t_{RAH}	Row Address Hold Time (ns)	10	-	10	-	
t_{ASC}	Column Address Setup Time (ns)	0	-	0	-	22
t_{CAH}	Column Address Hold Time (ns)	10	-	15	-	22
t_{RCD}	RAS to CAS Delay Time (ns)	20	45	20	50	10
t_{RAD}	RAS to Col. Address Delay Time (ns)	15	30	15	35	15,23
t_{RSH}	RAS Hold Time (ns)	15	-	20	-	22
t_{CSH}	CAS Hold Time (ns)	60	-	70	-	
t_{CRP}	CAS to RAS Precharge Time (ns)	5	-	5	-	22
t_{RPC}	RAS Precharge to CAS hold Time (ns)	5	-	5	-	22
t_T	Transition Time (Rise and Fall) (ns)	3	50	3	50	22
t_{AR}	Column Address Hold Time Referenced to RAS (ns)	-	-	-	-	

READ CYCLES (Note 8,18)

SYMBOL	PARAMETER	60 ns		70 ns		NOTES
		MIN.	MAX.	MIN.	MAX.	
t_{RAC}	Access Time from RAS (ns)	-	60	-	70	9,10,15,30
t_{CAC}	Access Time from \overline{CAS} (ns)	-	15	-	20	9,10,30
t_{AA}	Access Time from Address (ns)	-	30	-	35	9,15,30
t_{RCS}	Read Command Setup Time (ns)	0	-	0	-	22
t_{RCH}	Read Command Hold Time to CAS (ns)	0	-	0	-	14,22
t_{RRH}	Read Command Hold Time to \overline{RAS} (ns)	0	-	0	-	14,22
t_{RAL}	Column Address to RAS Lead Time(ns)	30	-	35	-	22
t_{CLZ}	CAS to Output in Low-Z (ns)	0	-	0	-	9,22
t_{DZC}	Data to CAS Low Delay Time (ns)	-	-	-	-	
t_{CDD}	CAS High to Data Delay Time (ns)	-	-	-	-	
t_{OFF}	Output Buffer Turn-Off Delay (ns)	0	15	0	20	12,24

WRITE CYCLES (Note 8,18)

SYMBOL	PARAMETER	60 ns		70 ns		NOTES
		MIN.	MAX.	MIN.	MAX.	
t_{WCS}	Write Command Set Up Time (ns)	0	-	0	-	13
t_{WCH}	Write Command Hold Time (ns)	10	-	15	-	
t_{WPF}	Write Command Pulse Width (ns)	10	-	15	-	
t_{RWL}	Write Command to RAS Lead Time (ns)	15	-	20	-	22
t_{CWL}	Write Command to CAS Lead Time (ns)	15	-	20	-	
t_{DS}	D_{IN} Setup Time (ns)	0	-	0	-	25
t_{DH}	D_{IN} Hold Time (ns)	10	-	15	-	22,25
t_{WCR}	Write Command Hold Time Referenced to RAS (ns)	-	-	-	-	
t_{DHR}	Data in Hold Time Referenced to RAS (ns)	-	-	-	-	

FAST PAGE MODE CYCLES (Note 8,18)

SYMBOL	PARAMETER	60 ns		70 ns		NOTES
		MIN.	MAX.	MIN.	MAX.	
t_{PC}	Fast Page Mode Cycle Time (ns)	40	-	45	-	
t_{RASP}	Fast Page Mode RAS Pulse Width (ns)	6	200000	70	200000	22
t_{CPRH}	RAS Hold Time from CAS Precharge (ns)	35	-	40	-	22
t_{CPA}	Access Time from CAS Precharge (ns)	-	35	-	40	9,21,22,30
t_{CPW}	WE Delay Time From CAS Precharge (ns)	60	-	70	-	13

REFRESH CYCLE (Note 8,18)

SYMBOL	PARAMETER	60 ns		70 ns		NOTES
		MIN.	MAX.	MIN.	MAX.	
t_{CHR}	CAS Hold Time (CAS-before-RAS Refresh Cycle) (ns)	10	-	15	-	22
t_{CSR}	CAS Setup Time (CAS-before-RAS Refresh Cycle) (ns)	10	-	10	-	22
t_{WRP}	WE Setup Time (CAS-before-RAS Refresh Cycle) (ns)	10	-	10	-	22
t_{WRH}	WE Hold Time (CAS-before-RAS Refresh Cycle) (ns)	10	-	10	-	22
t_{REF}	Refresh Period (4096 cycles) (ms)	-	64	-	64	

NOTES

1. Permanent damage to the device may occur if "ABSOLUTE MAXIMUM RATINGS" are exceeded. Functional operation should be restricted to the conditions as detailed in this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. All voltages referenced to V_{SS} .
3. I_{CC} is specified as an average current.
4. This parameter depends on output loading and/or cycle rates.
5. Specified values are obtained with the output open.
6. Address can be changed a maximum of once while $RAS = V_{IL}$.
7. Address can be changed a maximum of once while $CAS = V_{IH}$.
8. $V_{IH(min)}$ and $V_{IL(max)}$ are reference levels for measuring timing of input signals. Transition time (t_r) is measured between $V_{IH(min)}$ and $V_{IL(max)}$, and is assumed to be 5ns for all inputs. All input signals must transit between V_{IH} and V_{IL} (or V_{IL} and V_{IH}) without slope reversal.
9. Measured with a load equivalent to 2 TTL loads and 100pF.
10. Operation within the $t_{RCD(max)}$ limit ensures that $t_{RAC(max)}$ can be met. $t_{RCD(max)}$ is specified as a reference point only. If t_{RCD} is greater than the specified $t_{RCD(max)}$ limit, then access time is controlled exclusively by t_{CAC} .
11. Assumes that $t_{RAD} \leq t_{RAD(max)}$.
12. This parameter defines the time at which the output achieves the open circuit condition and is not referenced to V_{OH} or V_{OL} .
13. This is a non-restrictive operating parameter. It is included in the data sheet as an electrical characteristic only. If $t_{WCS} \geq t_{WCS(min)}$ the cycle is an early write cycle and the data out pins will remain high impedance (open circuit) for the duration of the cycle. If $t_{CWD(min)} \geq t_{CWD(min)}$, $t_{RWD} \geq t_{RWD(min)}$, $t_{AWD} \geq t_{AWD(min)}$, and $t_{CPW} > t_{CPW(min)}$ (for Fast Page Mode cycle only), then the cycle is a Read-Modify-Write cycle and the data output pins will hold the data read from the selected address. If neither of the above conditions are satisfied, the condition of the data out (at access time) is indeterminate.
14. Either t_{RCH} or t_{RRH} must be satisfied for a read cycle.
15. Operation within the $t_{RAD(max)}$ limit ensures that $t_{RAC(max)}$ can be met. $t_{RAD(max)}$ is specified as a reference point only. If t_{RAD} is greater than the specified $t_{RAD(max)}$ limit, then access time is controlled exclusively by t_{AA} .
16. Specified values are obtained with minimum cycle time.
17. Specified values are obtained with $T_A = 25^\circ C$.

18. An initial pause of 200 μ s is required after power-up followed by a minimum of eight initialization cycles (any 8 $\overline{\text{CAS}}$ -before-RAS or RAS-only Refresh cycles with WE high) before proper device operation is assured. Also, any 8 $\overline{\text{CAS}}$ -before-RAS or RAS-only Refresh cycles with WE high are required after prolonged periods (greater than t_{REF}) of RAS inactivity before proper device operation is assured.
19. Measured with a load equivalent to 50pF and 500 ohms.
20. Write cycle is applicable instead of read cycle. Timing requirements for RAS, CAS and Address are the same for Hidden Refresh Write Cycle as that shown for Hidden Refresh Read Cycle. WE, D_{IN} and D_{OUT} for Hidden Refresh Write Cycle are the same as for Write Cycle.
21. t_{CPA} is access time from $\overline{\text{CAS}}$ precharge (that is caused by changing $\overline{\text{CAS}}$ from "L" to "H"). Therefore, if t_{CP} is long, then t_{CPA} is longer than $t_{\text{CPA(max)}}$.
22. Calculated based on data supplied by the DRAM manufacturer(s).
23. Maximum value is calculated based on data supplied by the DRAM manufacturer(s).
24. Minimum value is calculated based on data supplied by the DRAM manufacturer(s).
25. This parameter is referenced to the $\overline{\text{CAS}}$ leading edge in Early Write cycles and to the WE leading edge in Read-Modify-Write cycles.
26. $V_{\text{IN}} = 0$ Volt.
27. Either t_{CDD} or t_{ODD} must be satisfied.
28. Either t_{DZC} or t_{DZO} must be satisfied.
29. $t_{\text{RASP(MIN)}}$ is specified as two cycles of $\overline{\text{CAS}}$ input are performed.
30. The access time is limited by all four parameters t_{RAC} , t_{CAC} , t_{AA} , t_{CPA} .
31. This assumes all RAS (and all $\overline{\text{CAS}}$ for CBR refresh) are active.

For Timing Diagrams see "**FPM Timing Diagrams**" (Document No. **20432C**).

Available from fax-on-demand and Website: <http://www.celestica.com/memory/>

Celestica Inc. 1996
Contact Information
For further information on this product, please call:

Celestica 1-888-899-9998

The information provided is believed to be accurate and reliable. Celestica reserves the right to make changes to this document and to the product described without notice. No liability is assumed as a result of its use nor for any infringement on the rights of others.

TM Celestica is a trademark of Celestica, Inc.

February 11, 1997