


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

KH-59-24

REVISIONS

ISSUE	CHANGES
15	CN 37530 A REDRAWN JW 02/26/98
16	CN 38772 D JLA 02/18/03

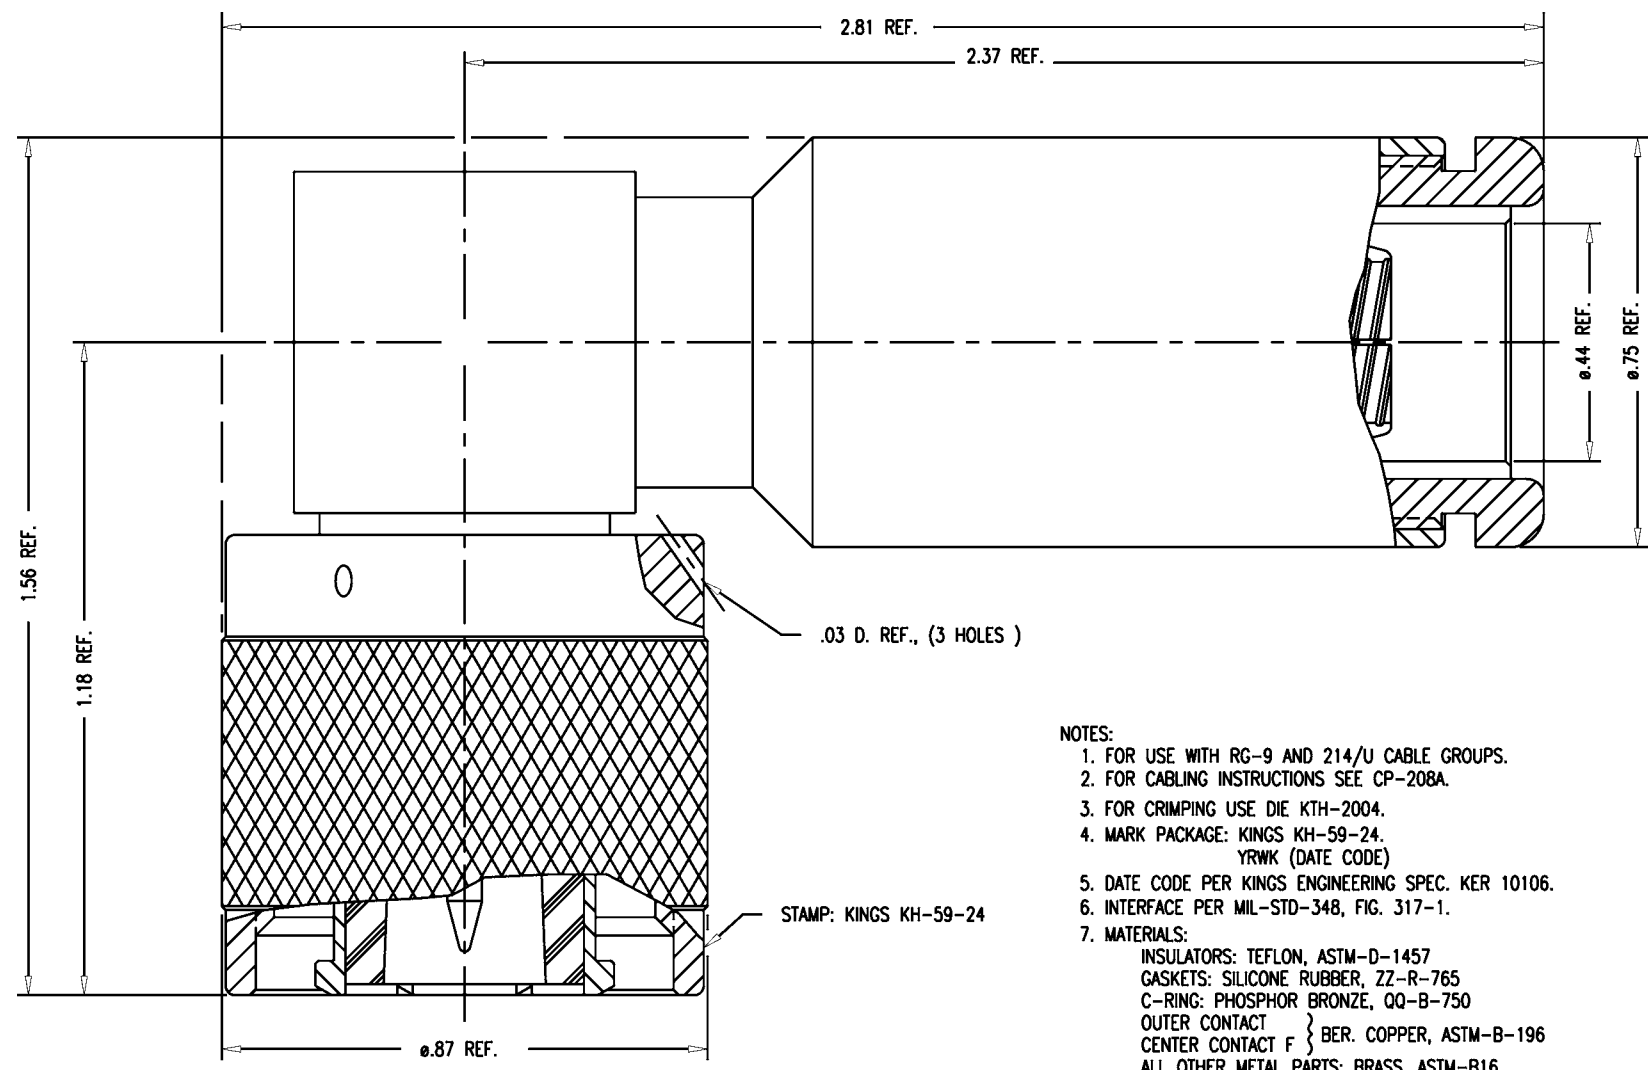

- NOTES:**
- FOR USE WITH RG-9 AND 214/U CABLE GROUPS.
 - FOR CABLING INSTRUCTIONS SEE CP-208A.
 - FOR CRIMPING USE DIE KTH-2004.
 - MARK PACKAGE: KINGS KH-59-24.
YRWK (DATE CODE)
 - DATE CODE PER KINGS ENGINEERING SPEC. KER 10106.
 - INTERFACE PER MIL-STD-348, FIG. 317-1.
 - MATERIALS:
INSULATORS: TEFLON, ASTM-D-1457
GASKETS: SILICONE RUBBER, ZZ-R-765
C-RING: PHOSPHOR BRONZE, QQ-B-750
OUTER CONTACT } BER. COPPER, ASTM-B-196
CENTER CONTACT F }
ALL OTHER METAL PARTS: BRASS, ASTM-B16
 - FINISHES:
CENTER CONTACT ASSEMBLY: HARD GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: SILVER PLATE, PER QQ-S-365
 - ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 1500 VRMS
FREQUENCY RANGE: DC TO 4 GHz.

GSD

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PL, ANG, HN

DRAWN PAS DATE 06/12/80

DESIGN LI DATE 06/27/80

APPR. DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KH-59-24