

VTS-1 Process Photodiodes

VTS _ 22, _ 28


E G & G VACTEC

T-41-51

PRODUCT DESCRIPTION

Large area planar silicon photodiodes primarily intended for use in the photovoltaic mode. These devices have low series resistance, moderate shunt resistance and high open circuit voltage at nominal light levels for use in power conversion and battery charging applications. Cells have solderable contacts and are available with or without flexible flying leads. Devices with leads are acrylic (plastic) coated.

PACKAGE DIMENSIONS inch (mm)

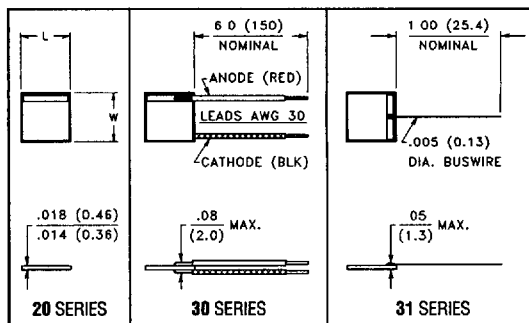

ABSOLUTE MAXIMUM RATINGS

Storage Temperature:

-40°C to 150°C Series 20, 31

-40°C to 105°C Series 30

Operating Temperature:

-40°C to 125°C Series 20, 31

-40°C to 105°C Series 30

CASE 44A

ANODE (ACTIVE) SURFACE SHOWN
CATHODE IS BACKSIDE

DIMENSIONS	VTS _ 22	VTS _ 28
L	.400 (10.16)	.800 (20.32)
W	.400 (10.16)	.800 (20.32)
ACTIVE AREA	.130 ² (84 ²)	.607 ² (392 ²)

ELECTRO-OPTICAL CHARACTERISTICS @ 25°C (See also VTS-1 curves, page 75)

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	VTS _ 22			VTS _ 28			UNITS
			Min	Typ.	Max.	Min.	Typ.	Max.	
I _{sc}	Short Circuit Current	H = 100 fc, 2850 K		.580		1.9	2.5		mA
TC I _{sc}	I _{sc} Temp. Coefficient	2850 K		.20			.20		% / °C
I _{sc}	Short Circuit Current	H = 100 mW/cm ²	21.5	23		86			mA
V _{oc}	Open Circuit Voltage	H = 100 fc, 2850 K		.45		.45			V
V _{oc}	Open Circuit Voltage	H = 100 mW/cm ²		.57		.57			V
TC V _{oc}	V _{oc} Temp. Coefficient	2850 K		-2.0		-2.0			% / °C
I _D	Dark Current	H = 0, V _R = 500 mV	2.0	50		10	200		μA
R _{SH}	Shunt Resistance	H = 0, V = 10 mV		.11		.022			MΩ
TC R _{SH}	R _{SH} Temp. Coefficient	H = 0, V = 10 mV		-8.0		-8.0			% / °C
C _J	Junction Capacitance	H = 0, V = 0 V		23		94			nF
λ _{range}	Spectral Application Range		400	1050	400	1050			nm
λ _p	Spectral Response - Peak			875		875			nm
S _R	Sensitivity	@ Peak		.51		.51			A/W