



SUPER BRIGHT LED NUMERIC DISPLAY



▼10mm TYPE

Ta=25°C

Case Size (W×H)	Shape	Type No.		Emitted Color	Luminous Intensity Iv						fig.	
		Anode common	Cathode common		Rank A		Rank B		Rank C			
					MIN	TYP	MIN	TYP	MIN	TYP		IF
25.2 × 19.0	Square shape type 	NAR241/243	NKR241/243	Red	2	4	4	8	8	11	20	9
		NAG241/243	NKG241/243	Pure Green	0.5	1	1	2	—	—	20	
		NAG241P/243P	NKG241P/243P	Green	0.5	1	1	2	—	—	20	
		NAY241/243	NKY241/243	Yellow	1.5	3	3	6	—	—	20	
		NAA241/243	NKA241/243	Orange	1.5	3	3	6	—	—	20	
25.2 × 19.0	Arrow feather type 	NAR245/247	NKR245/247	Red	1.6	3.2	3.2	6.4	6.4	8.8	20	10
		NAG245/247	NKG245/247	Pure Green	0.4	0.8	0.8	1.6	—	—	20	
		NAG245P/247P	NKG245P/247P	Green	0.4	0.8	0.8	1.6	—	—	20	
		NAY245/247	NKY245/247	Yellow	1.2	2.4	2.4	4.8	—	—	20	
		NAA245/247	NKA245/247	Orange	1.2	2.4	2.4	4.8	—	—	20	

▼DIMENSIONS Unit : mm

Tolerance: ±0.25 mm

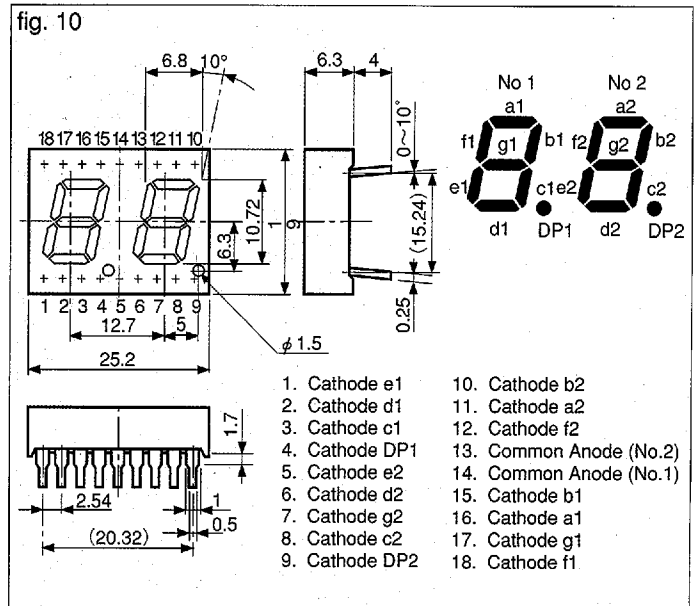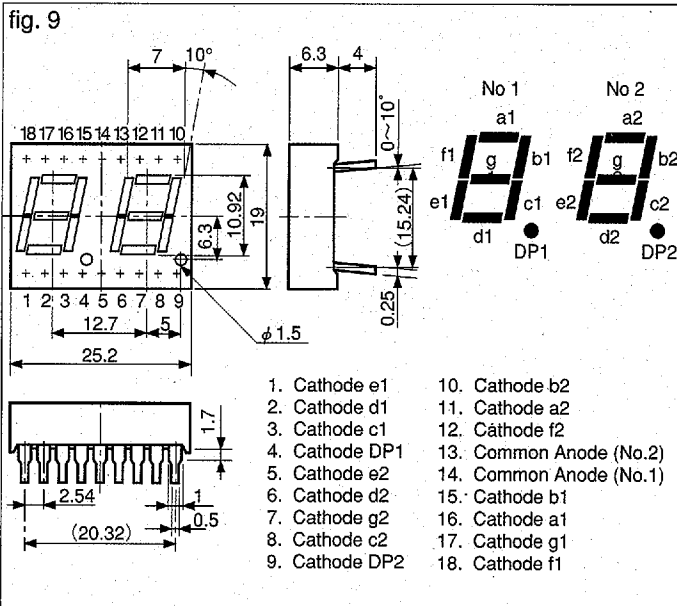

● Common cathode types shown in fig. 9 and 10 have a reverse polarity.