

NOTES:


- ① MAT'L: COPPER (STOCK TKN. $\frac{.031}{.79}$)
- ② PLATING: ELECTRO TIN (.0003 MIN)
- ③ TIN-PLATED BRASS FUNNEL FERRULE
- ③ NYLON INSULATION (COLOR CODED BLUE) 2.06

STUD SIZES: ($\pm .005$)

02 = .094
 04 = .119
 06 = .146
 08 = .173
 10 = .198
 14 = .265
 56 = .328
 38 = .390

UL LISTING #E32244
 CSA LISTING #18689

WIRE SIZE: 16 - 14 AWG
 1.0 - 2.5 MM²

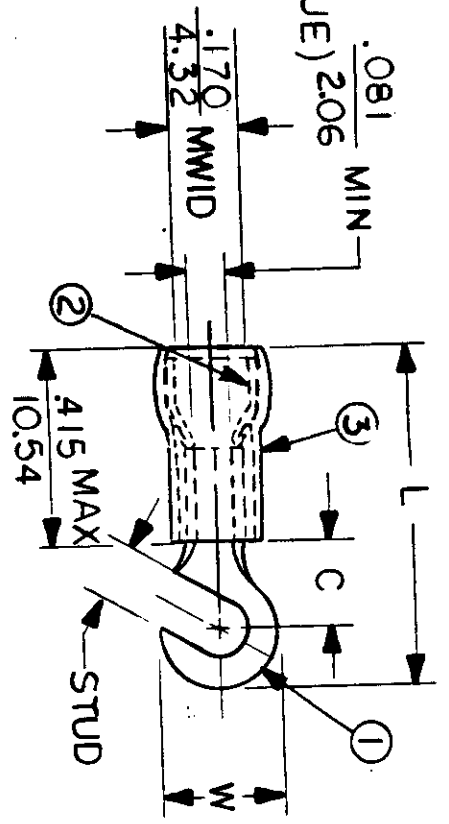

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$ (MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" $\pm .010$	"C" MIN.	"L" MAX.	REFERENCE	SCALE:		DATE	TITLE:	DWG. NO.
					NTS	JJ			
BB-819-	.350 <u>8.89</u>	.271 <u>6.88</u>	.917 <u>23.29</u>		CHKD. BY: GZ	APPD. BY:	11-14-84	HOOE TONGUE TERMINAL AVIKRIMP 800-SERIES.	A
									CUSTOMER DWG
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED					DRAWN. BY: JJ		11-9-84	EIC INCORPORATED molex	
FRAC.	DEC.	ANG.							
\pm	\pm	\pm							