


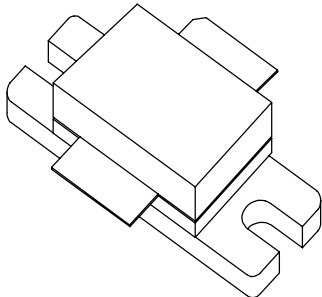

ITC1000

1000 WATT, 50V, Pulsed Avionics 1030 MHz

<p>GENERAL DESCRIPTION</p> <p>The ITC1000 is a common base bipolar transistor. It is designed for pulsed interrogator systems in the frequency band of 1030 MHz. The device has gold thin-film metallization for proven high MTF. The transistor includes input returns for improved output rise time. Low thermal resistance package reduces junction temperature which extends the life time of the product.</p>	<p>CASE OUTLINE 55SW, Style 1 Common Base</p> 
<p>ABSOLUTE MAXIMUM RATINGS</p> <p>Power Dissipation</p> <p>Device Dissipation¹ @25°C (P_d) 3400 W</p> <p>Thermal Resistance¹ (θ_{JC}) .08°C/W</p> <p>Voltage and Current</p> <p>Collector-Base Voltage 65V</p> <p>Emitter-Base Voltage 3.5V</p> <p>Collector Current¹ 80A</p> <p>Temperatures</p> <p>Storage Temperature -40 to +150°C</p> <p>Operating Junction Temperature¹ +200°C</p>	

ELECTRICAL CHARACTERISTICS @ 25°C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
BVebo ²	Emitter-Base Breakdown(open)	I _e =50mA	3.5			V
BVces	Collector-Emitter Breakdown(shorted)	I _c =30mA	65			V
BVceo ²	Collector-Emitter Breakdown (open)	I _c =30mA	30			V
h _{FE} ²	DC Current Gain	I _c =5A, V _{ce} =5V	20	45	80	β

FUNCTIONAL CHARACTERISTICS @ 25°C

G _{PB}	Common Base Power Gain	V _{cc} = 50V, F = 1030MHz, P _{out} =1000W, PW=1μS, DF=1%	8.0	8.5		dB
η _c	Collector Efficiency	V _{cc} = 50V, F = 1030MHz, P _{out} =1000W, PW=1μS, DF=1%	35	45		%
t _r	Rise Time	V _{cc} = 50V, F = 1030MHz, P _{out} =1000W, PW=1μS, DF=1%		50	80	nS
VSWR	Output Load Mismatch	V _{cc} = 50V, F = 1030MHz, P _{out} =1000W, PW=1μS, DF=1%			4:1	Ψ
Z _{in}	Series Input Impedance (Circuit source impedance @ test cond.)	V _{cc} = 50V, F = 1030MHz, P _{out} =1000W, PW=1μS, DF=1%	1.0-j2.0			Ω
Z _{out}	Series Output Impedance (Circuit load impedance @ test cond.)	V _{cc} = 50V, F = 1030MHz, P _{out} =1000W, PW=1μS, DF=1%	0.6-j2.1			Ω

¹ At rated output power and pulse conditions


² Contains input returns and cannot be measured

Initial Issue May 1999

Test Fixture Schematic For The ITC1000

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
------	-----	-------------	------	----------

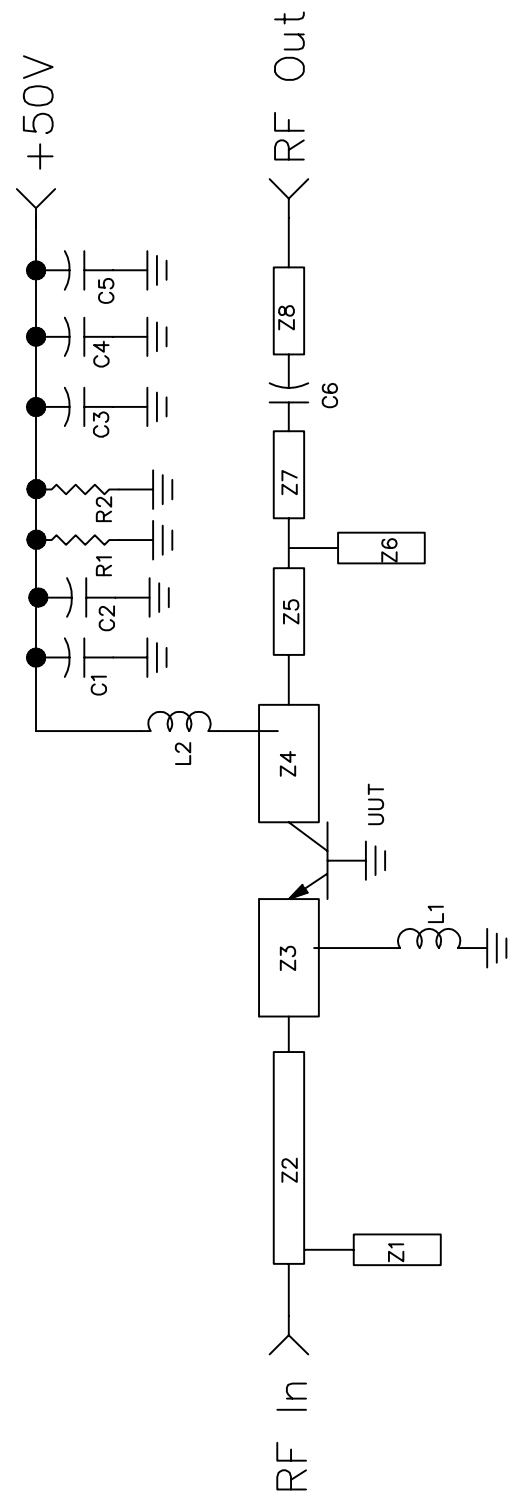

Z1- Z8 See PCB Autocad Drawing ITC1000pcb_rev4.dwg

L1 1/2 Turn 18 Awg, .335 ID, 1.4" long

L1 0.100" x 0.150" x 0.005" copper strip

C1 30pF ATC 100B

C2 62pF ATC 100B

C3 1000 uF, 63V

C4 470 uF, 63V

C5 330 uF, 63V

C6 56 pF, ATC100B

R1, R2 10K, 1/4W, 1206

MECHANICAL DWG OF FIXTURE LAYOUT AVAILABLE UPON REQUEST



CAGE 0PJR2	DWG NO. ITC1000 Test Fixture Schematic	REV 1
SCALE n/a	SHEET	