

SPECIFICATION :

Current Rating : 1Amp.

Withstanding Voltage : AC 500V R.M.S

Insulation Resistance : 1000Megohms Minimum
At DC 500V.






Contact Resistance : 15 Millmihms Maximum.

Operating Temperature: -40°C~105°C.

Insulator: PBT+30% Glass Fiber (UL94V-0)

Contact : Phosphor Bronze Or Brass

Contact Plated: Gold Or Tin Over Nickel

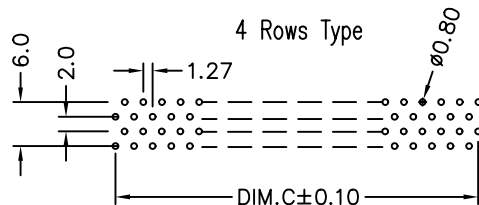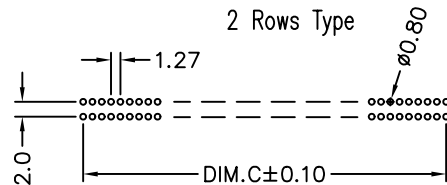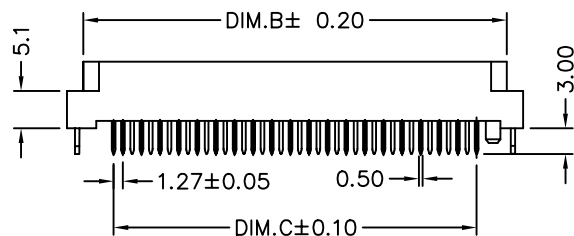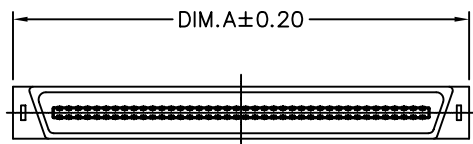

P. C. B. LAYOUT

PIN	A	B	C
20	24.15	19.73	11.43
40	36.85	32.43	24.13
50	43.2	38.78	30.48
68	54.63	50.21	41.91
80	62.25	57.83	49.53



A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY HMP SERIESE		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.1 .XX ±0.05 ANG.
PART No. SCAXXXPD		CHECKED BY RAN		
DRAWING No. SCAXXXPD		DRAWING BY LCH		
SCALE NONE	REV. A	UNIT mm		

AREA	REVISIONS	CHK	DATE