

“High Frequency Ceramic Solutions”

2.45 GHz Balun

P/N 2450BL15A100



Detail Specification Page 1 of 2

Part Number	Frequency (MHz)	Impedance Unbal. / Bal.	Insertion Loss	Return Loss	Phase Difference	Amplitude Difference
2450BL15A100_	2400 - 2500	50/100 Ω	1.0 dB max.	9.5 dB min.	180°±10°	2.0 dB max.

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 /100 Ω	-40 to +85°C	4,000


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 ± .004	0.049± .004	0.034 ± .004	0.012 ± .004	0.008 ± .004	0.012 + .004/-0.008	0.014 ± .004	0.026 ± .002
mm	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.30 ± 0.1	0.20 ± 0.1	0.30+0.1/-0.2	0.35 ± 0.1	0.65 ± 0.05




Terminal Configuration

1	Unbalanced Port	4	Balanced Port
2	GND	5	GND
3	Balanced Port	6	NC



Mounting Considerations

Mount these devices with brown colored side facing u
Line width should be designed to provide 50Ω
impedance matching characteristics.

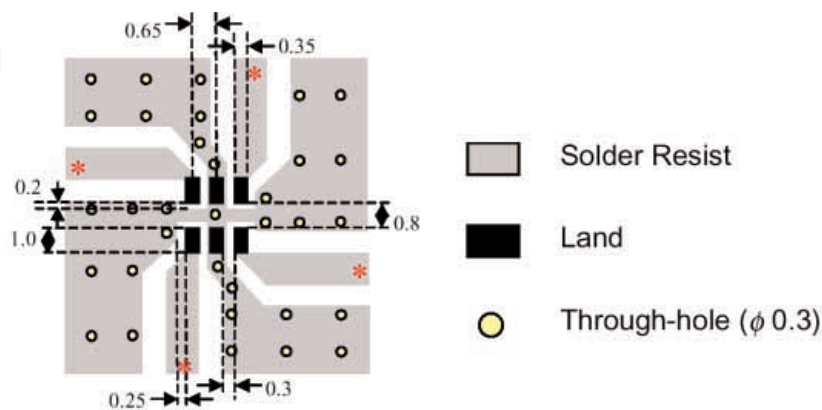

*Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.*

“High Frequency Ceramic Solutions”

2.45 GHz Balun

P/N 2450BL15A100

Detail Specification Page 2 of 2

P/N 2450BL15A100 Balun
Typical **Return Loss** & **Insertion Loss**

