



E-Series Surface Mount Mixer 3 – 2500 MHz

EMRS-25MH

Features


- LO Power +13 dBm
- Up to +9 dBm RF
- Surface Mount



Description

M/A-COM's EMRS-25MH is a medium drive, Passive, Double Double Balanced Mixer constructed using Broadband Ferrite Balun Transformers and matched silicon Schottky diodes.

SM-1 Package

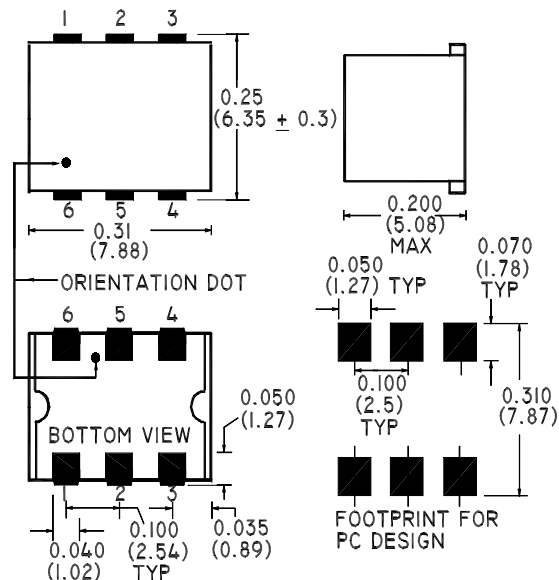

Electrical Specifications @ +25°C, Z₀ = 50 Ohms, LO = +13dBm

Parameter	Units	Minimum	Typical	Maximum
Frequency Range				
RF 5 - 2500	MHz	—	—	—
LO 5 - 2500	MHz	—	—	—
IF 3 - 1500	MHz	—	—	—
Conversion Loss				
5 - 1250	dB	—	6.3	8.5
5 - 2500	dB	—	7.3	9.8
Isolation (LO - RF)				
5 - 50	MHz	28	45	—
50 - 1250	MHz	23	35	—
1250 - 2500	MHz	20	30	—
Isolation (LO - IF)				
5 - 50	MHz	23	40	—
50 - 1250	MHz	20	30	—
1250 - 2500	MHz	17	25	—

Specifications subject to change without notice.

S 0740 C

V 1.0

■ North America: Tel. (800) 366-2266, Fax (800) 618-8883
■ Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Visit www.macom.com for additional data sheets and product information.

tyco Electronics



Absolute Maximum Ratings


Parameter	Absolute Maximum
RF Power	50 mW
Peak IF Current	40 mA
Storage Temperature	-40°C to +85°C
Operating Temperature	-40°C to +85°C
Pin Temperature (10 Seconds)	260°C

Functional Configuration


Function	Pin No.
LO	1
RF	4
IF	5
Ground	2, 3, 6
Case Ground	—
Unconnected	—

Typical Performance @ +25°C


Conversion Loss

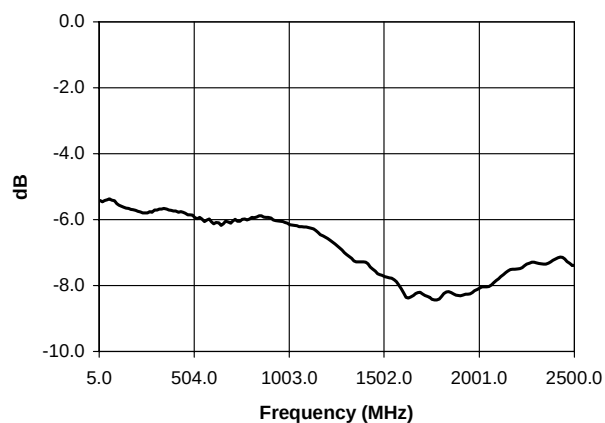

L-R Isolation

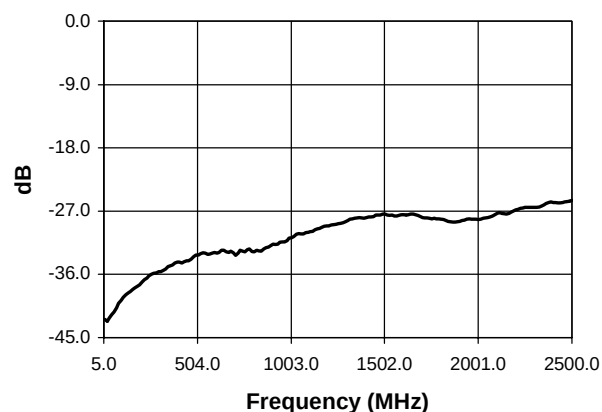

L-X Isolation

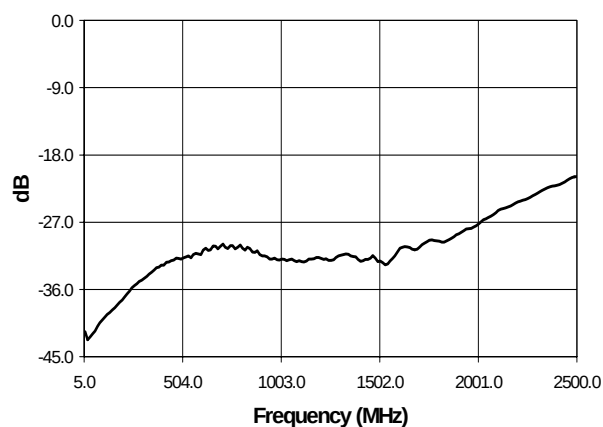

Specifications subject to change without notice.

S 0740 C

V 1.0

■ North America: Tel. (800) 366-2266, Fax (800) 618-8883
 ■ Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Visit www.macom.com for additional data sheets and product information.

tyco / Electronics

MACOM