

Qty	Note	Finish	Material	Name	ltm
1	25T	Silver	Brass	T-Shunt(M3)	6
1	25T	Silver	Cu-Ti	Tip(M4)	5
1	20T	Silver	PBS(5210)	Ring(M1)	4
1	20T	Silver	PBS(5210)	Extra Ring(M5)	3
1	20T	Silver	PBS(5210)	Ground(M6)	2
1			NY6T/NY9T	Housing(P1)	1




9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 643-6129
 Website: www.cuistack.com

TITLE: SMT Audio Jack w/4 Conductors 2.5mm

PART NO. SJ-42535TS-SMT UNITS: Millimeters

DRAWN BY: Todd R. White APPROVED BY: SCALE: 4X

Solder Pad Layout
 Bottom View

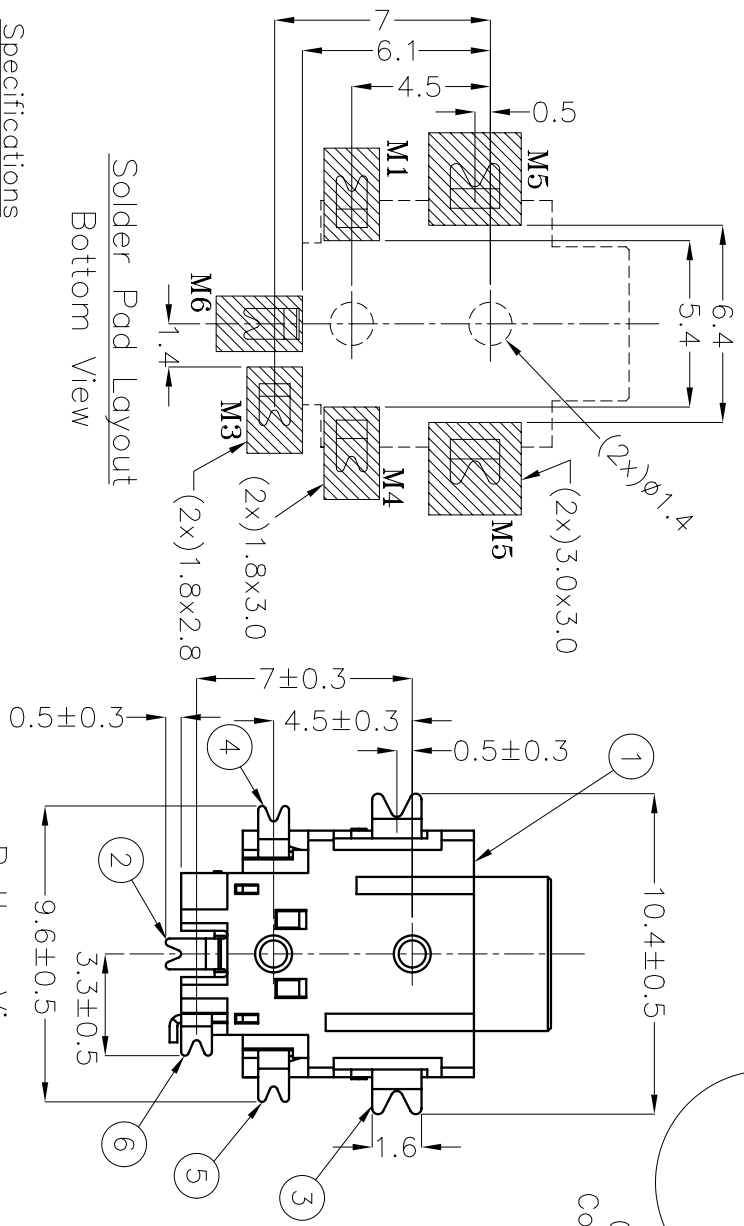

Bottom View

Specifications
 Rated Voltage: 16 VDC
 Rated Current: 300mA
 Contact Resistance: 100 mOHMS or less under all conditions including after life testing.

Insulation Resistance: 100 M OHMS or greater at 500 VDC.
 Dielectric Withstand Voltage: 500V AC RMS for 1 minute
 Life: 5,000 cycles min.