


Löten  
(Nur Lot im Buchseninnenbereich)

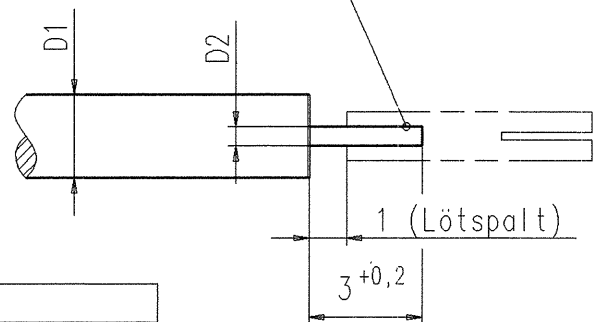

STANDARD MATING AREA: IEC 169-15 GRADE1

ENVIRONMENTAL CHARACTERISTICS PLEASE REFER TO:  
IMS CATALOGUE

PART	MATERIAL	FINISH
BODY	CuZn39 Pb3 F44	LAST DIGIT OF CODE ('): 1: 0.8µm Au
CENTRE CONTACT	BERYLCO 33-25	1.3µm Au
ISOLATOR	TEFLON (PTFE)	5: OPTALLOY 9: 5-8µm Ni

Für Kabel /  
For cable

gr.	Type/Typ	∅D1	∅D2	∅D3	∅D4
6	RG 405/U (UT85)	2.20	0,51	2.40	3.10
7	RG 402/U (UT141)	3.58	0.91	3.80	4.50

**IMS CONNECTOR SYSTEMS GMBH**

ALLGEMEINTOL.  
ISO 2768  
mH

Masstab: 5:1

	Datum	Name
Bearb.	29.06.99	Baumgärtner
Gepr.		
Norm		

Flanschbuchse

459/99	b	D3/D4 Anpassung	20.09.99	Hogg
524/98	a	UEBERARBEITUNG	25.09.98	Fa
Nr.	Zust.	Aenderung	Datum	Name

750.42.2017.1''

Rev.  
b