


SPECIFICATION CONTROL DRAWING

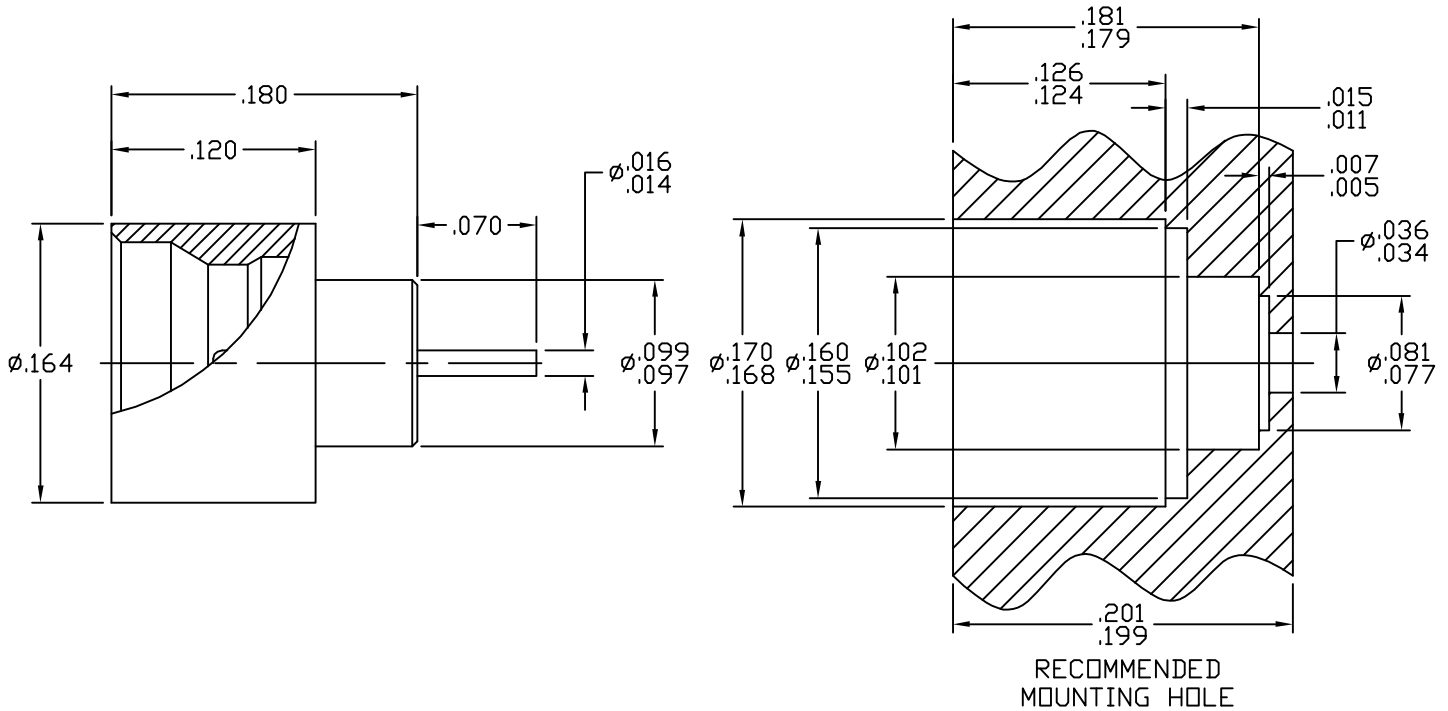


1. MATING INTERFACE DIMENSIONS PER DYNAWAVE SPEC. MD-21 (SMP MALE)
AND MIL-STD-348A-326.2

2. ELECTRICAL

FREQUENCY RANGE GHz _____ DC TO 39.0 GHz.
 VSWR (MAX.) * _____ 1.02 + .003 x FGHz.
 INSERTION LOSS (dB MAX.) * _____ .045 dB x $\sqrt{\text{FGHz}}$.
 NOMINAL IMPEDANCE (OHMS) _____ 50
 VOLTAGE RATING (MAX. VRMS) _____ 250
 RF LEAKAGE (MIN. dB DOWN) _____ N/A
 TEMPERATURE RATING (DEGREES CENTIGRADE) _____ -65 ° c TO +165 ° c
 DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS) _____ 750
 INSULATION RESISTANCE (MIN. MEGOHMS) _____ 10,000
 CONTACT RESISTANCE
 • CENTER CONTACT (MAX. MILLIOHMS) _____ 10.0
 • OUTER CONTACT (MAX. MILLIOHMS) _____ 2.0

* TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.	DIMENSIONS ARE IN INCHES TOLERANCES			 HAVERHILL, MA. 01835
				DECIMALS	FRACTIONAL	ANGULAR	
AA	04-1418	4/1/04	DC	.X ± .030 .XX ± .010 .XXX ± .005	±/64	X° +1'0" X° X' ± 15"	
AB	05-1080	1/20/05	DC	SURFACE ROUGHNESS 63 $\sqrt{\text{MIL-STD 10}}$.			
				DRAWN DC DATE 4/1/04			TITLE SMP, PLUG (FULL DETENT) HERMETICALLY SEALED SHROUD SOLDER MOUNT
				APPROVED DC DATE 4/1/04			
				CODE IDENT. 2J899	SHEET 1 OF 2		DWG. NO. 2140-0435-7407

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT

- MIN. AXIAL FORCE _____ 4.5 LBS.
- MIN. RADIAL TORQUE _____ 2.5 IN. OZ.

CONNECTOR ENGAGEMENT FORCES

- INSERTION (MAX. OUNCES) _____ 10.0 LBS.
- WITHDRAWAL (MIN. OUNCES) _____ 5.0 LBS.

CONNECTOR DURABILITY (MIN. MATING) _____ N/A

4. ENVIRONMENTAL

TEMPERATURE CYCLING _____ MIL-STD-202, METHOD 102, COND. C (-65 ° c TO + 200 ° c)

SHOCK _____ MIL-STD-202, METHOD 213, COND. I (100 G's)

VIBRATION _____ MIL-STD-202, METHOD 204, COND. D (20 G's)

MOISTURE RESISTANCE _____ MIL-STD-202, METHOD 106, LESS STEP 7b

CORROSION _____ MIL-STD-202, METHOD 101, COND. B (48 HOURS)

BAROMETRIC PRESSURE (ALTITUDE) _____ MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

HERMETICITY _____ 1×10^{-8} cc/SEC.

5. MATERIAL

CONNECTOR BODY AND GLASS PIN _____ KOVAR PER MIL-I-23011

GLASS _____ CORNING 7070

6. FINISH

CONNECTOR BODY AND GLASS PIN _____ GOLD PER MIL-G-45204, TYPE III, GRADE A, CLASS 1 (.000050 MIN. THK.)
OVER NICKEL PER MIL-P-27418 (.000100/.000150 THK.)
OVER NICKEL (WOODS OR WATTS), (.00001 MIN. THK.)

GLASS _____ N/A