

THYRISTOR SURGE PROTECTIVE DEVICE

V_{DRM} : 58 - 320 V

I_{PP} : 30 A


FEATURES

- ◇ Oxide glass passivated junction
- ◇ Bidirectional protection in a single device
- ◇ Surge capabilities up to 30A @10/1000us or 150A @8/20us
- ◇ High off state impedance and low on state voltage
- ◇ Plastic material has UL flammability classification 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC DO-15 molded plastic
- ◇ Polarity: Denotes none cathode band
- ◇ Weight: 0.4 grams

DO - 15

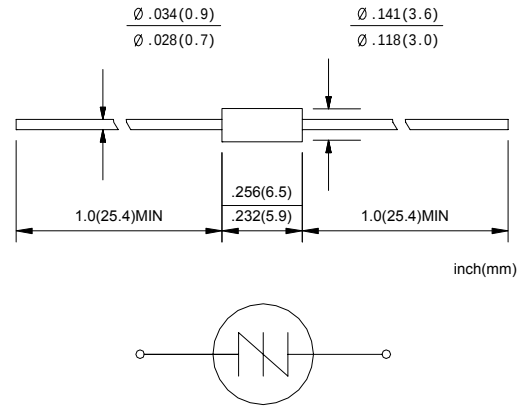

MAXIMUM RATINGS

CHARACTERISTICS	SYMBOL	VALUE	UNIT
Non-repetitive peak impulse current @ 10/1000us	I_{PP}	30	A
Non-repetitive peak on-state current @ 8.3ms (one half cycle)	I_{TSM}	15	A
Junction temperature range	T_J	-55 --- +150	°C
Storage temperature range	T_{STG}	-55 --- +150	°C


THERMAL RESISTANCE

CHARACTERISTICS	SYMBOL	VALUE	UNIT
Junction to leads	$R_{\theta JL}$	30	°C/W
Junction to ambient on print circuit (on recommended pad layout)	$R_{\theta JA}$	120	°C/W
Typical positive temperature coefficient for breakdown voltage	V_{BR}/T_J	0.1	%/°C

MAXIMUM RATED SURGE WAVEFORM

WAVEFORM	STANDARD	$I_{PP}(A)$
2/10 us	GR-1089-CORE	200
8/20 us	IEC 61000-4-5	150
10/160 us	FCC Part 68	100
10/700 us	ITU-T K20/21	60
10/560 us	FCC Part 68	50
10/1000 us	GR-1089-CORE	30

I_{PP} , PEAK PULSE CURRENT (%)

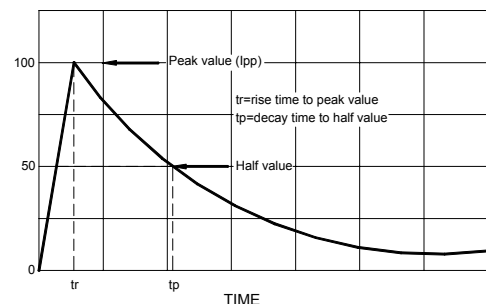


www.galaxycn.com

RATINGS AND CHARACTERISTIC CURVES

P064L --- P350L

PARAMETER	RATED REPETITIVE OFF-STATE VOLTAGE	OFF-STATE LEAKAGE CURRENT @ V_{DRM}	BREAKOVER VOLTAGE	ON-STATE VOLTAGE @ $I_T=1.0\text{A}$	BREAKOVER CURRENT		HOLDING CURRENT		OFF-STATE CAPACITANCE
SYMBOL	V_{DRM}	I_{DRM}	V_{BO}	V_T	I_{BO}^-	I_{BO}^+	I_H^-	I_H^+	C_o
UNITS	VOLTS	μA	VOLTS	VOLTS	mA	mA	mA	mA	pF
LIMIT	MAX	MAX	MAX	MAX	MIN	MAX	MIN	MAX	TYP
P064L	58	5	77	3.5	50	800	150	800	100
P072L	65	5	88	3.5	50	800	150	800	100
P090L	75	5	98	3.5	50	800	150	800	100
P110L	90	5	130	3.5	50	800	150	800	60
P130L	120	5	160	3.5	50	800	150	800	60
P150L	140	5	180	3.5	50	800	150	800	60
P180L	160	5	220	3.5	50	800	150	800	60
P230L	190	5	265	3.5	50	800	150	800	40
P260L	220	5	300	3.5	50	800	150	800	40
P310L	275	5	350	3.5	50	800	150	800	40
P350L	320	5	400	3.5	50	800	150	800	40

SYMBOL	PARAMETER
V_{DRM}	Stand-off voltage
I_{DRM}	Leakage current at stand-off voltage
V_{BR}	Breakdown voltage
I_{BR}	Breakdown current
V_{BO}	Breakover voltage
I_{BO}	Breakover current
I_H	Holding current Note:1
V_T	On state voltage
I_{PP}	Peak pulse current
C_o	Off state capacitance Note:2

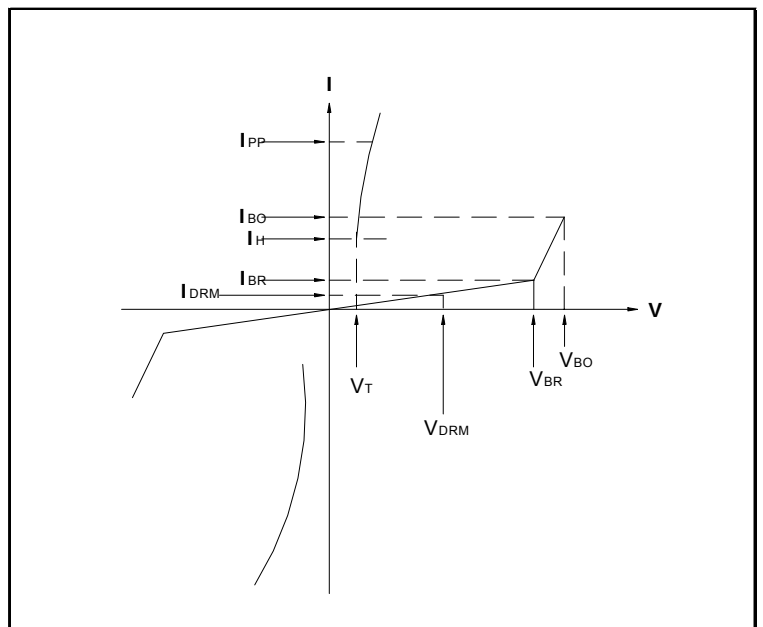

NOTES: 1. $I_H > (V_L/R_L)$ L_F this criterion is not obeyed, the T_{SPD} triggers but does not return correctly to high-resistance state. The surge recovery time does not exceed 30ms.

2. Off-state capacitance measured at $f=1.0\text{MHz}$; $1.0V_{\text{RMS}}$ signal; $V_R=2V_{\text{DC}}$ bias.

FIG.1 – OFF STATE CURRENT vs JUNCTION TEMPERATURE

I_{DRM} , OFF STATE CURRENT, μA

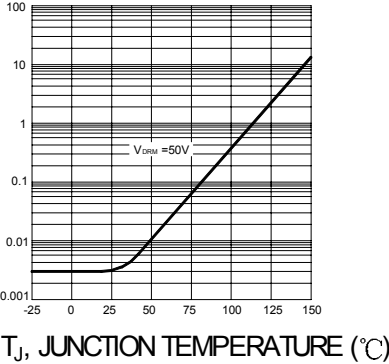


FIG.2- RELATIVE VARIATION OF BREAKDOWN VOLTAGE vs JUNCTION TEMPERATURE

NORMALIZED BREAKDOWN VOLTAGE

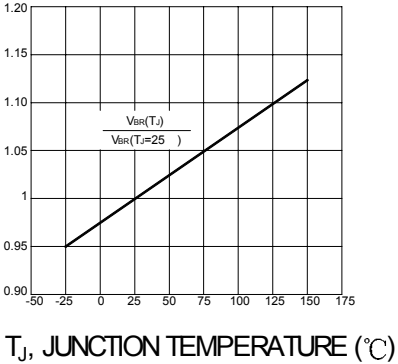


FIG.3 – RELATIVE VARIATION OF BREAKOVER VOLTAGE vs JUNCTION TEMPERATURE

NORMALIZED BREAKOVER VOLTAGE

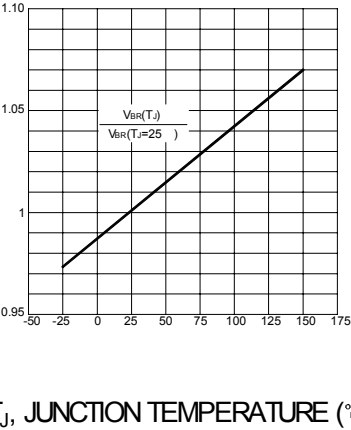


FIG.4 – ON STATE CURRENT vs ON STATE VOLTAGE

I_T , ON STATE CURRENT

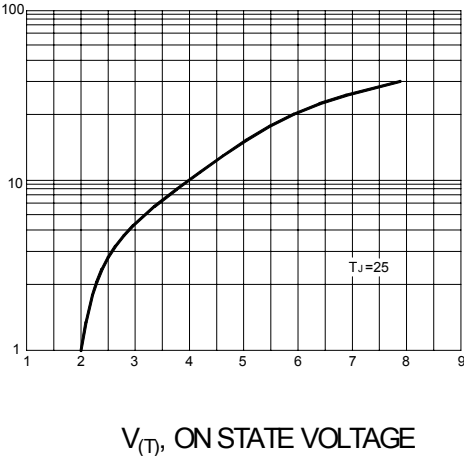


FIG.5 – RELATIVE VARIATION OF HOLDING CURRENT vs JUNCTION TEMPERATURE

NORMALIZED HOLDING CURRENT





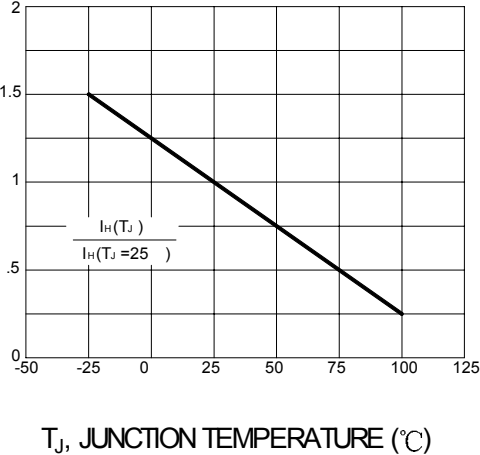


FIG.6 – RELATIVE VARIATION OF JUNCTION CAPACITANCE vs REVERSE VOLTAGE BIAS

NORMALIZE CAPACITANCE

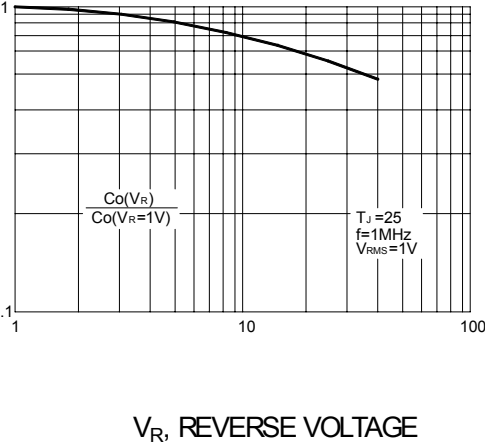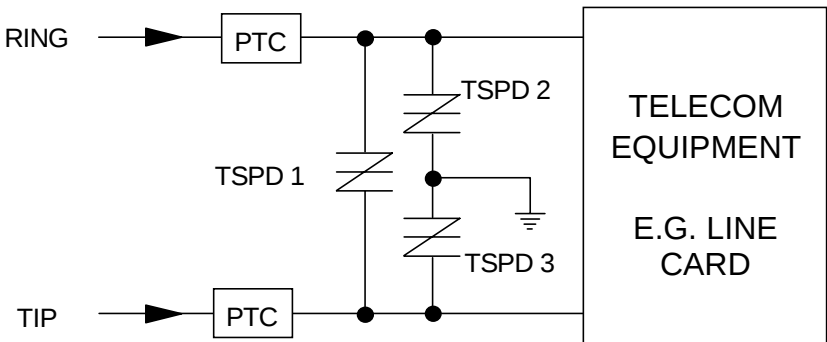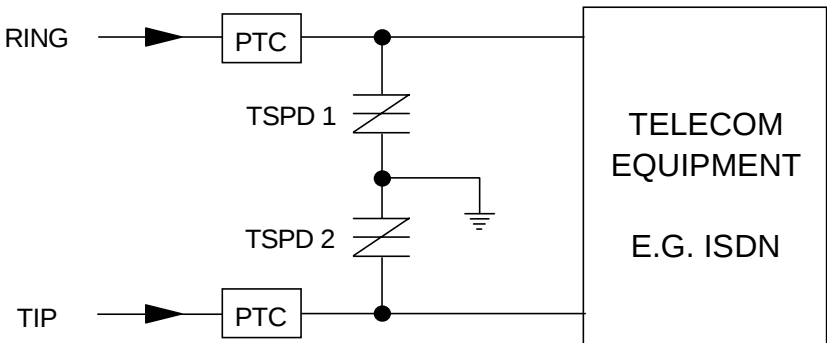

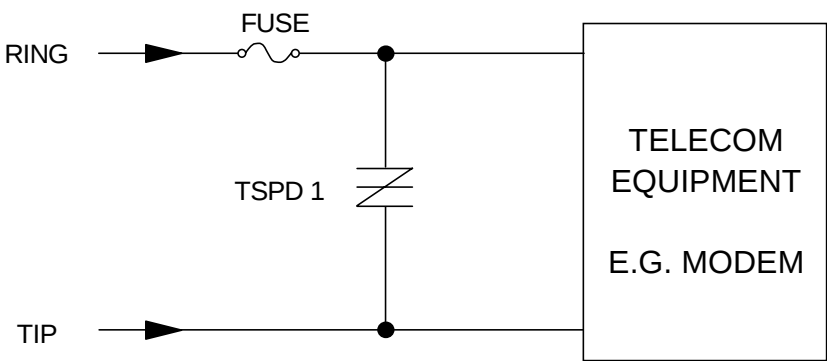

The PTC (Positive Temperature Coefficient) is an overcurrent protection device