

CFPS-32 SMD CLOCK OSCILLATORS

ISSUE 4; 1 NOVEMBER 2008 - RoHS 2002/95/EC

Description

- 2.5V surface mount oscillator in a ceramic package, with a hermetically sealed metal lid

Package Outline

- 7 x 5mm

Frequency Range

- 1.8 to 160MHz

Output Compatibility & Load

- Tri-state CMOS
- Drive Capability 15pF max

Frequency Stabilities

- $\pm 25\text{ppm}$, $\pm 50\text{ppm}$, $\pm 100\text{ppm}$ (inclusive of supply voltage and output load variations over the operating temperature range)

Operating Temperature Ranges

- 10 to 70°C (CFPS-32)
- 40 to 85°C (CFPS-32I)

Storage Temperature Range

- 55 to 125°C

Tri-state Operation

- Logic '1' (> 70% Vs) to pad 1 enables oscillator output
- Logic '0' (< 30% Vs) to pad 1 disables oscillator output; oscillator output goes to the high impedance state
- No connection to pad 1 enables oscillator output

Standby Current

- 10 μA max

Start-Up Time

- 10ms max

Environmental

- Shock: MIL-STD-202F, Method 213B (1000G, 0.5ms, 1/2 sine wave)
- Vibration: MIL-STD-202F, Method 204D, Test Condition D20G, frequency range 10-2000Hz, 4 hrs for X, Y & Z axes, (total 12 hrs)

Marking Includes

- Model Number + Frequency




Packaging

- Bulk or Tape and Reel

Minimum Order Information Required

- Frequency + Model Number + Operating Temperature Code (if applicable) + Frequency Stability


Outline (mm)




Pad Connections

1. Enable/Disable
2. GND
3. Output
4. +Vs


Solder pads layout



Output Waveform

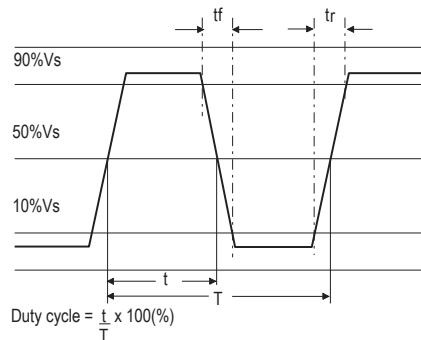

Test Circuit

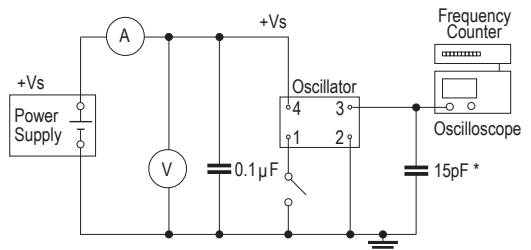

* Inclusive of jiggging and equipment capacitance

CLOCK OSCILLATORS

Electrical Specifications - maximum limiting values


Frequency Range	Frequency Stability	Supply Voltage	Supply Current	Rise Time (tr)	Fall Time (tf)	Duty Cycle	Model Number
1.8 to 32.0MHz	±25ppm, ±50ppm, ±100ppm	2.5V ±5%	10mA	5ns	5ns	45/55%	CFPS-32 CFPS-32I
>32.0 to 50.0MHz			18mA				
>50.0 to 80.0MHz			28mA	4ns	4ns	40/60%	
>80.0 to 125.0MHz							
>125.0 to 160.0MHz							

Ordering Example 24.0MHz CFPS-32 C
 Frequency _____
 Model No. _____
 Operating Temperature Code: I = -40 to 85°C; not applicable for -10 to 70°C _____
 Frequency Stability A = ±25ppm; B = ±50ppm; C = ±100ppm _____

Please note that the rise and fall times listed are the maximum values we specify to cover various frequency breaks.
 In practice the actual values are generally lower depending upon the spot frequency chosen. For typical values please contact our sales office.

CLOCK
OSCILLATORS

Tape (mm)

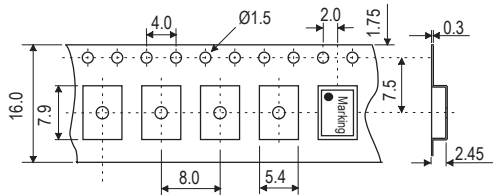

Reel (mm)

