


## C-CPS-8002500-03-N

Coaxial Power Splitter | 800-2500 MHz | N-Female | 3-way

Electrical Characteristics		
Frequency bands	800-2500 MHz	
Division	3	
Division loss	4.8 dB	
Insertion loss	≤ 0.3 dB	
VSWR	≤ 1.3	
Intermodulation (2x43 dBm)	≤ -140 dBc	
Ripple	≤ 0.3 dB	
Power rating	200 W	
Impedance	50Ω	
FIT (ppm/year)	500	
Temperature range	-30° to 70° C	-22° to 158° F
Connector(s)	N Female	
Mechanical Characteristics		
Dimensions Length x Width x Depth	235.8 x 60.8 x 25 mm	9.3 x 2.4 x 1.0 in
Net weight	0.2 kg	0.4 lb
Packing dimensions Length x Width x Depth	250 x 75 x 35 mm	9.8 x 3.0 x 1.4 in
Packed weight	0.23 kg	0.5 lb
Applications	Indoor	
Mounting		
Mounting bracket	No	

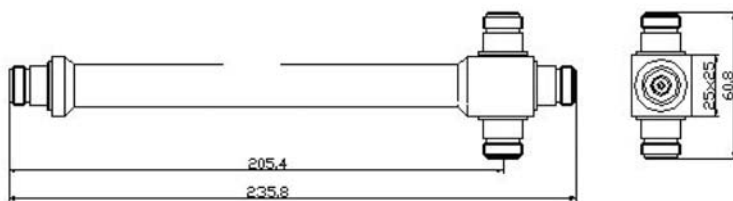

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.