



DTSM-2 SERIES

12x12 Surface Mounting Type

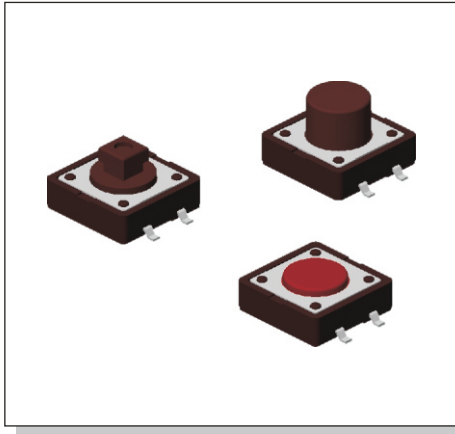

HOW TO ORDER

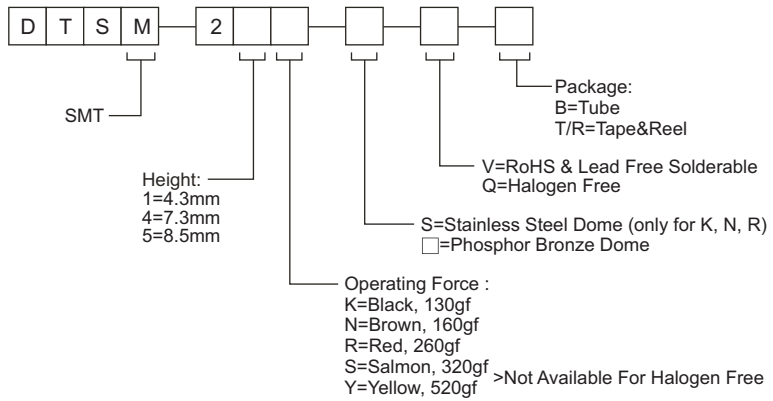

SPECIFICATION

MECHANICAL

Operation Force: 520 ± 130gf Yellow(Y)
320 ± 80gf Salmon (S)
260 ± 50gf Red (R)
160 ± 50gf Brown (N)

Stroke: 0.35 ± 0.1mm

ENVIRONMENTAL

Operation Temperature: -25°C to +70°C
Storage Temperature: -30°C to +80°C

ELECTRICAL

Electrical Life:

*Phosphor Bronze Dome

100,000 cycles for 520gf, 320gf, 260gf
200,000 cycles for 160gf

*Stainless Steel Dome


300,000 cycles for 520gf, 320gf
500,000 cycles for 260gf
1,000,000 cycles for 100gf, 160gf

Rating: 50mA, 12VDC


PACKAGE

DTSM-2: 40 pcs/tube
DTSM-21: 700 pcs/reel
DTSM-24: 500 pcs/reel
DTSM-25: 400 pcs/reel



CIRCUIT

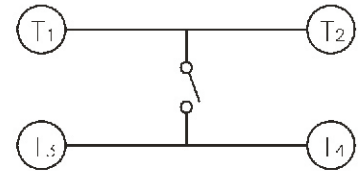

DTSM-21.25



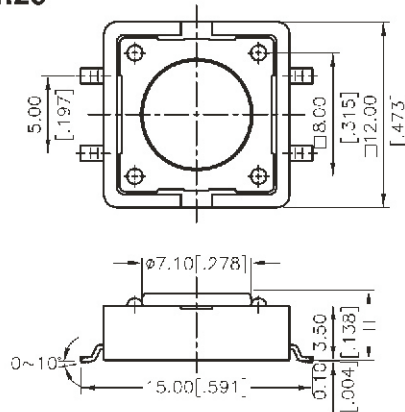


DTSM-25□	8.50[.335]
DTSM-21□	4.30[.169]
PROD. NO.	H

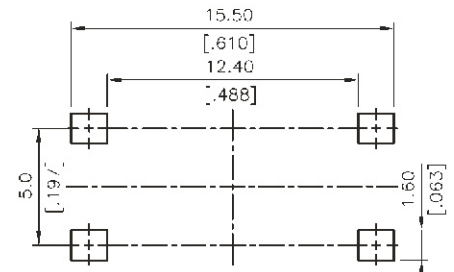

P.C.B. LAYOUT

DTSM-24

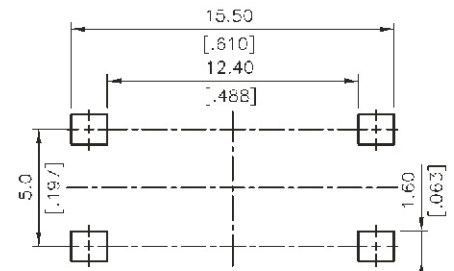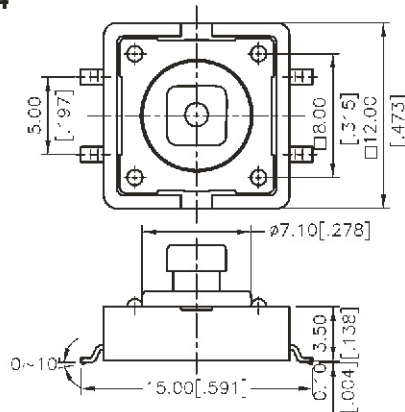

P.C.B. LAYOUT