

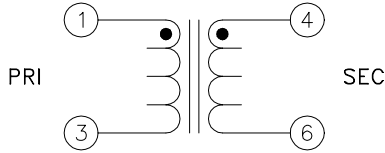


SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
LF1	Sn96%, Ag4%	Yes	Yes

TERM. NO.'s FOR REF. ONLY

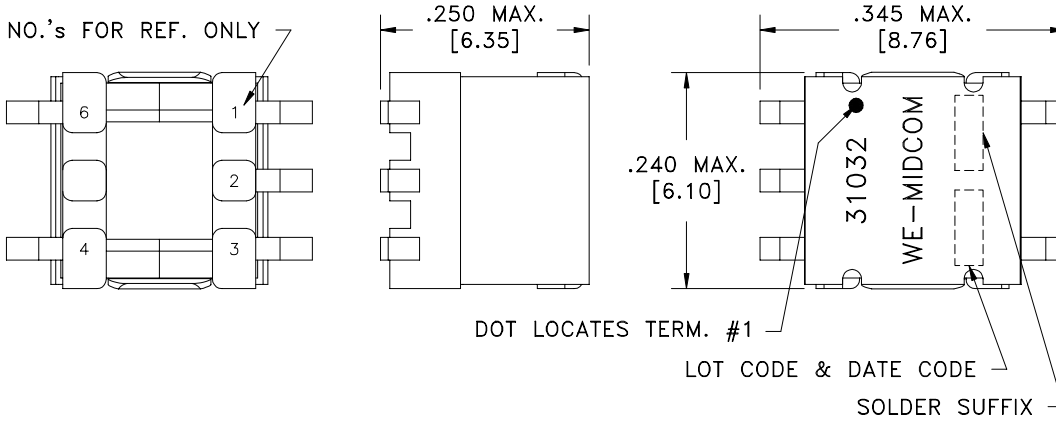

AREA REPRESENTS
TERMINAL PAD DIMENSIONS

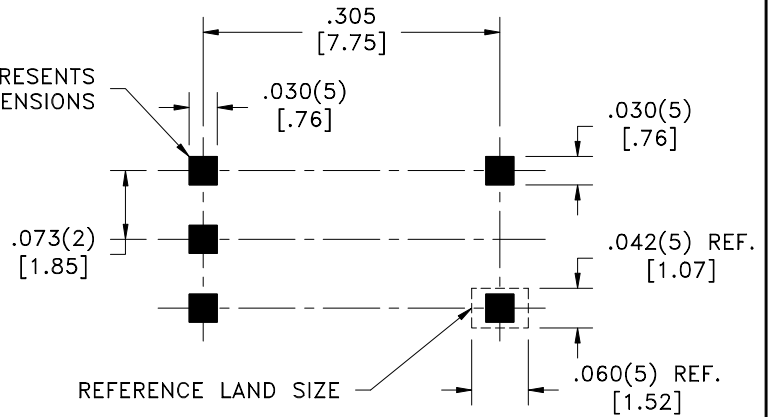

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C): 1-3, 0.900 ohms max.
4-6, 12.25 ohms max.
- DIELECTRIC RATING: 550VDC for 1 minute between 1-4.
- INDUCTANCE: 3.7uH ±20%, 10kHz, 10mVAC, 3-1, Ls.
- TURNS RATIO: (4-6):(1-3) = 12.00:1, ±1%.

DETAILS SUBJECT TO CHANGE

Midcom, Inc.
Watertown, SD USA
Toll Free: 800-643-2661
Fax: 605-886-4486

Unless otherwise specified:
Tolerances: Fractions: ±1/64
Angles: ±1° Decimals: ±.005 [.13]

DRAWING TITLE
TRANSFORMER

Midcom

DRAWING NO.
31032R-LF1

REV.
6B
2/07

This drawing is dual dimensioned.
Dimensions in brackets are in millimeters.

REVISIONS: SEE SHEET 1

SCALE --- SHEET 2 OF 5

DWG # 31032R-LF1