

Description

The PUMA 68F16001 is a 16Mbit CMOS FLASH memory module organised as 512K x 32 in a JEDEC 68 pin surface mount PLCC, available with access times of 120, 150, 200 and 250ns. The output width is user configurable as 8, 16 or 32 bits using four Chip Selects (CS1~4).


Page write (256 Bytes) is performed in 10ms with Toggle bit and DATA polling indication of cycle completion. The device features both hardware and software data protection and a low power standby of 6.6mW. Write cycle endurance is 10,000 Erase/Write cycles with a data retention time of 10 years.

A version 'A' with four independent write enables (WE1-4) is available.


Features

- Access Times of 120, 150, 200 and 250ns.
- JEDEC 68 'J' leaded plastic Surface Mount Substrate.
- Industrial or Military.
- User Configurable as 8 / 16 / 32 bit wide output.
- Operating Power : 880 mW (max)
- Standby Power : -L Part (CMOS) 6.6 mW (max)
- Page Write (256 Bytes) in 10ms typ.
- DATA Polling and Toggle bit indication of end of write.
- Hardware and Software Data Protection.
- Endurance of 10⁴ Erase/write Cycles and Data Retention Time of 10 years.

Block Diagram (See page 10 for 'A' version)

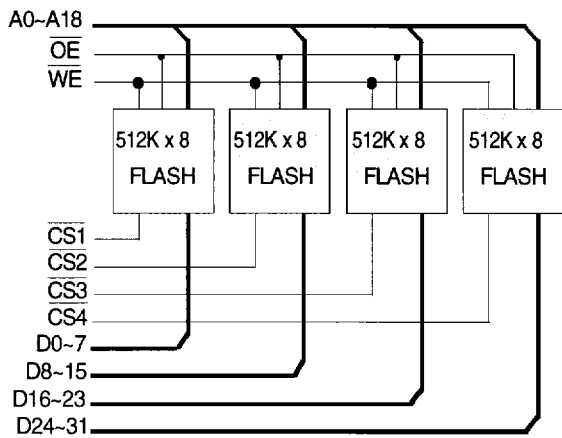

Pin Definition (See page 10 for 'A' version)

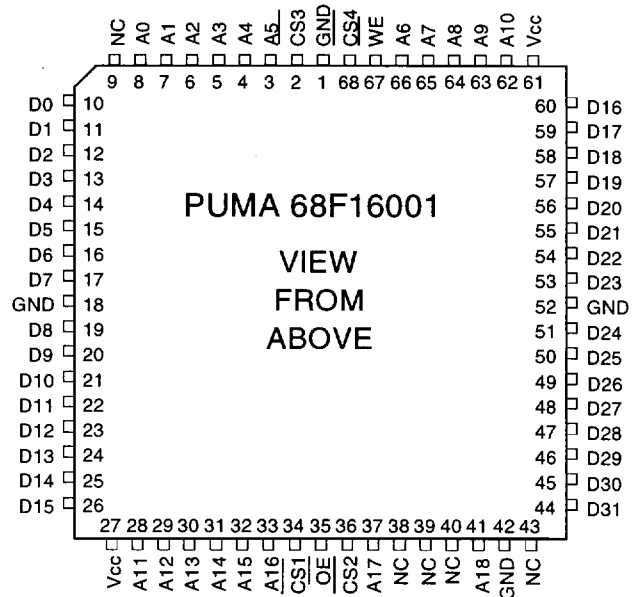

Pin Functions

- A0~18** Address Inputs
- CS1~4** Chip Select
- WE** Write Enable
- V_{cc}** Power (+5V)

- D0~31** Data Inputs/Outputs
- OE** Output Enable
- NC** No Connect
- GND** Ground

DC OPERATING CONDITIONS**Absolute Maximum Ratings** ⁽¹⁾

Operating Temperature	T_{OPR}	-55 to +125	°C
Storage Temperature	T_{STG}	-65 to +150	°C
Input voltages (including N.C. pins) with Respect to GND	V_{IN}	-0.6 to +6.25	V
Output voltages with respect to GND	V_{OUT}	-0.6 to $V_{CC}+0.6$	V

Notes : (1) Stresses above those listed may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Recommended Operating Conditions

		<i>min</i>	<i>typ</i>	<i>max</i>	
DC Power Supply Voltage	V_{CC}	4.5	5.0	5.5	V
Input Low Voltage	V_{IL}	-	-	0.8	V
Input High Voltage	V_{IH}	2.0	-	-	V
Operating Temp Range	T_A	0	-	70	°C
	T_{AI}	-40	-	85	°C (I Suffix)
	T_{AM}	-55	-	125	°C (M Suffix)

DC Electrical Characteristics ($T_A = -55^\circ\text{C}$ to $+125^\circ\text{C}$, $V_{CC} = 5\text{V} \pm 10\%$)

Parameter	Symbol	Test Condition	<i>min</i>	<i>max</i>	Unit
Input Leakage Current	I_{LI}	$V_{IN} = \text{GND to } V_{CC}$	-	40	μA
Output Leakage Current	32 bit I_{LO}	$V_{IN} = \text{GND to } V_{CC}$, $\overline{CS}^{(1)} = V_{IH}$	-	40	μA
Operating Supply Current	32 bit I_{CC32}	$\overline{CS}^{(1)} = \overline{OE} = V_{IL}$, $\overline{WE} = V_{IH}$, $I_{OUT} = 0\text{mA}$, $f = 5\text{MHz}$	-	160	mA
	16 bit I_{CC16}	As above	-	86	mA
	8 bit I_{CC8}	As above	-	49	mA
Standby Supply Current	TTL levels I_{SB1}	$\overline{CS}^{(1)} = V_{IH}$, $I_{IO} = 0\text{mA}$, Other Inputs = V_{IH}	-	12	mA
	CMOS levels I_{SB2}	$\overline{CS}^{(1)} = V_{CC} - 0.3\text{V}$, $I_{IO} = 0\text{mA}$, Other Inputs = V_{CC}	-	1.2	mA
Output Low Voltage	V_{OL}	$I_{OL} = 2.1\text{mA}$	-	0.45	V
Output High Voltage	V_{OH}	$I_{OH} = -400\mu\text{A}$	2.4	-	V

Notes (1) \overline{CS} above are accessed through CS1-4. These inputs must be operated simultaneously for 32 bit operation, in pairs in 16 bit mode and singly for 8 bit mode.

Capacitance ($T_A = -25^\circ\text{C}$, $f = 1\text{MHz}$) Note: These parameters are calculated, not measured.

Parameter	Symbol	Test Condition	<i>typ</i>	<i>max</i>	Unit	
Input Capacitance	A0-A18, \overline{OE} , \overline{WE}	C_{IN1}	$V_{IN} = 0\text{V}$	-	30	pF
	Other Inputs	C_{IN2}	$V_{IN} = 0\text{V}$	-	10	pF
Output Capacitance	C_{OUT}	$V_{OUT} = 0\text{V}$	-	52	pF	

AC OPERATING CONDITIONS**Read Cycle**

Parameter	Symbol	-12		-15		-20		-25	
		min	max	min	max	min	max	min	max
Read Cycle Time	t_{RC}	120	-	150	-	200	-	250	-
Address Access Time	t_{AA}	-	120	-	150	-	200	-	250
Chip Select Access Time	t_{CS}	-	120	-	150	-	200	-	250
Output Enable Access Time	t_{OE}	0	50	0	70	0	80	0	90
Chip Select High to High Z Output	t_{HZ}	0	30	0	40	0	50	0	60 (1)
Output Enable High to High Z Output	t_{OHZ}	0	30	0	40	0	50	0	60 (1)
Output Hold from Address Change	t_{OH}	0	-	0	-	0	-	0	-

Notes: (1) t_{HZ} is specified from \overline{OE} or \overline{CS} 1-4 whichever occurs first (Cl=5 pf).


(2) All parameter Units are nS

Write Cycle


Parameter	Symbol	min	typ	max	Unit
Write Cycle Time	t_{WC}	-	-	10	ms
Address Set-up Time	t_{AS}	10	-	-	ns
Address Hold Time	t_{AH}	50	-	-	ns
Output Enable Set-up Time	t_{OES}	10	-	-	ns
Output Enable Hold Time	t_{OEH}	10	-	-	ns
Chip Select Set-up Time	t_{CS}	0	-	-	ns
Chip Select Hold Time	t_{CH}	0	-	-	ns
Write Pulse Width	t_{WP}	90	-	-	ns
Write Enable High Recovery	t_{WPH}	100	-	-	ns
Data Set-up Time	t_{DS}	50	-	-	ns
Data Hold Time	t_{DH}	10	-	-	ns
Byte Load Cycle	t_{BLC}	-	-	150	μ s

AC Test Conditions

- * Input pulse levels: 0V to 3.0V
- * Input rise and fall times: 5ns
- * Input and Output timing reference levels: 1.5V
- * Output load: 1 TTL gate + 100pF
- * $V_{CC}=5V\pm 10\%$

Output Test Load

Read Cycle Timing Waveform

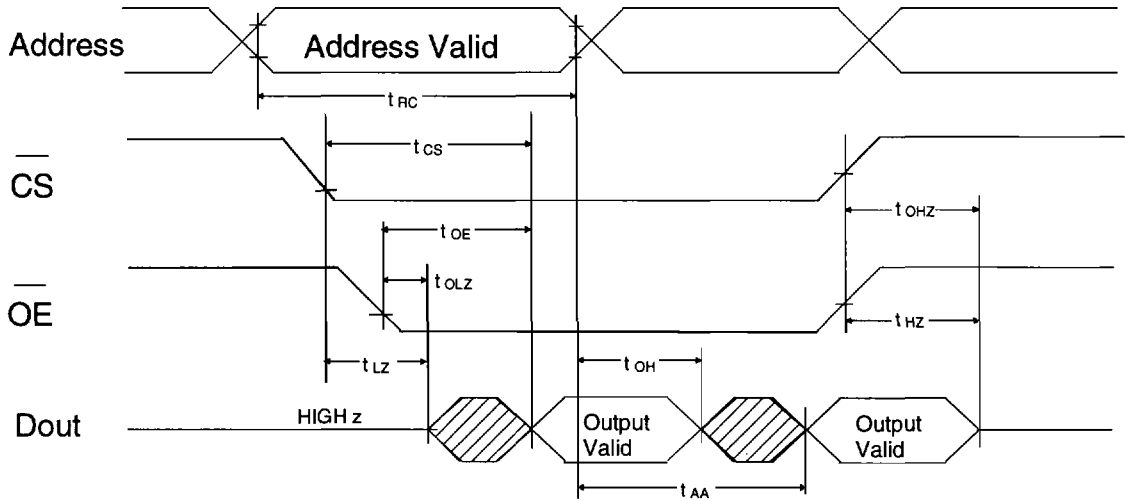

Software Protected Write Waveform

- Note: (1) A8 through A18 must specify the page address during each high to low transition of Write Enable (or Chip select).
(2) Output Enable must be high only when Write Enable and Chip Select are both low.
(3) All bytes that are not loaded within the sector being programmed will be indeterminate.

Device Operation

Read

The PUMA 68F16001 read operations are initiated when Write Enable is high and both Output Enable and Chip Select are LOW. The read operation is terminated by either Chip Select or Output Enable returning HIGH. This 2-line control architecture eliminates bus connection in a system environment. The data bus will be in a high impedance state when either Output Enable or Chip Select is HIGH.

Write

The device is reprogrammed on a sector basis. Byte loads are used to enter the 256 bytes of a sector to be programmed or the software codes for data protection. A byte load is performed by applying a low pulse on the \overline{WE} or \overline{CE} input with \overline{CE} or \overline{WE} low (respectively) and \overline{OE} high. The address is latched on the falling edge of \overline{CE} or \overline{WE} , whichever occurs last. The data is latched by the first rising edge of \overline{CE} or \overline{WE} .

If a byte of data within a sector is to be changed, data for the entire sector must be loaded into the device. Any byte that is not loaded during the programming of its sector will be erased to read FFh.

During a reprogram cycle, the address locations and 256 bytes of data are internally latched, freeing the address and data bus for other operations. Following the initiation of a program cycle, the device will automatically erase the sector and then program the latched data using an internal control timer. The end of a program cycle can be detected by DATA polling on D7. Once the end of a program cycle has been detected, a new access for a read or program can begin.

Each new byte to be programmed must have its high to low transition on \overline{WE} (or \overline{CE}) within 150 μ s of the high to low transition of \overline{WE} (or \overline{CE}) of the preceding byte. If a high to low transition is not detected within 150 μ s of the last low to high transition, the load period will end and the internal programming period will start. A8 to A18 specify the sector address. The sector address must be valid during each high to low transition of \overline{WE} (or \overline{CE}). A0 to A7 specify the byte address within the sector. The bytes may be loaded in any order; sequential loading is not required.

DATA Polling

In order to detect the end of a write cycle, two methods are provided. During a write operation (Byte or Page) an attempt to read the last byte written will result in the compliment of the written data appearing on D7 (or D15, D23 or D31, depending on the device selected). Once the write cycle is completed, true data appears on the outputs and the next write cycle may begin. Using this method of indicating the end of a write can effectively reduce the total write time by 50%.

TOGGLE bit

In addition to DATA polling, another method is provided to determine the end of a Write Cycle. During a write operation successive attempts to read data will result in D6 (or D14, D22 or D30, depending on the device selected) toggling between 1 and 0. Once a write is complete, this toggling will stop and valid data will be read as normal, allowing the next write cycle to be performed. This can eliminate the software housekeeping chore of saving and fetching the last address and data written in order to implement DATA polling. This can be especially helpful in an array composed of multiple PUMA 68F16001 modules that are frequently updated.

Hardware Data Protection

Both hardware and software protection is provided as described below.

Four types of hardware protection give high security against accidental writes:

- If $V_{cc} < 3.8V$, Write is inhibited.
- \overline{OE} low, \overline{CS} or \overline{WE} high inhibits inadvertant Write Cycles during power-on and power-off. Write Cycle timing specifications must be observed concurrently.
- Pulses are less than 15ns on \overline{WE} do not initiate a Write Cycle.


Software controlled data protection, once enabled by the user, means that a software algorithm must be used before any write can be performed. To enable this feature the algorithm below is followed, and must be reused for each subsequent write operation. Once set the data protection remains operational until it is disabled by using the second algorithm overleaf: power transitions will not reset this feature.

Software Algorithms

Selecting the software data protection mode requires the host system to precede datawrite operations by a series of three write operations to three specific addresses. The three byte sequence opens the page write window enabling the host to write 256 bytes of data. Once the page load cycle has been completed, the device will automatically be returned to the data protected state

Software Data Protection Algorithm (1)



Regardless of whether the device has been protected or not, once the software data protected algorithm is used and the data is written, the PUMA 68F16001 will automatically disable further writes unless another command is issued to cancel it. If no further commands are issued the PUMA 68F16001 will be write protected during power-down and any subsequent power-up.

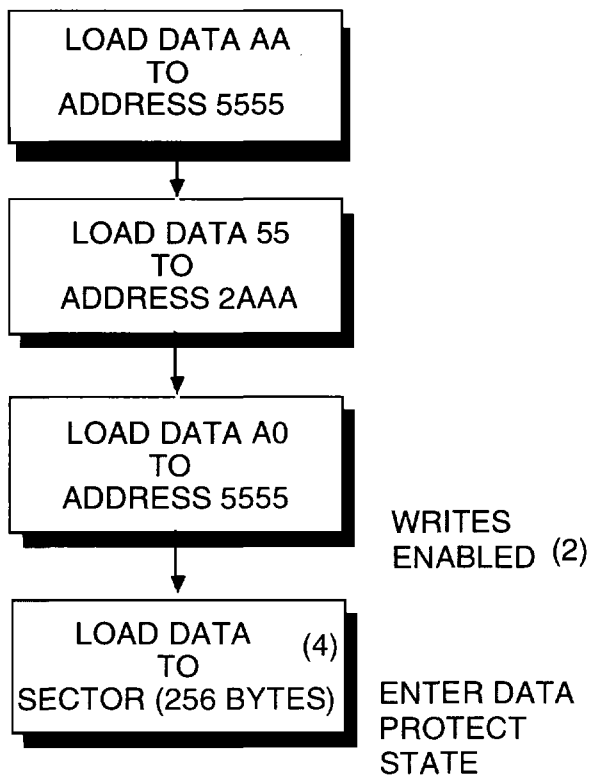

Notes:



- (1) Data Format I/O7-I/O0 (Hex); **Once initiated, this sequence of write operations should not be interrupted.**
- (2) Enable Write Protect state will be initiated at end of write even if no other data is loaded.
- (3) Disable Write Protect state will be initiated at end of write period even if no other data is loaded.
- (4) 256 bytes of data must be loaded.

Version 'A' Pin Definition **Version 'A' Block Diagram**

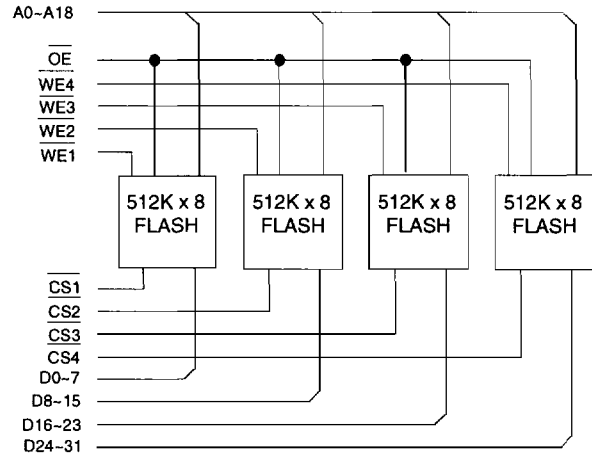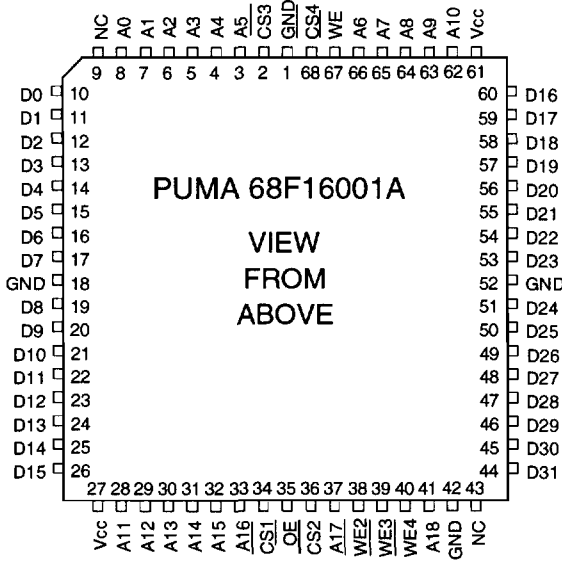

Package Information **Dimensions in mm(inches)**

Plastic 68 Pin JEDEC Surface mount PLCC

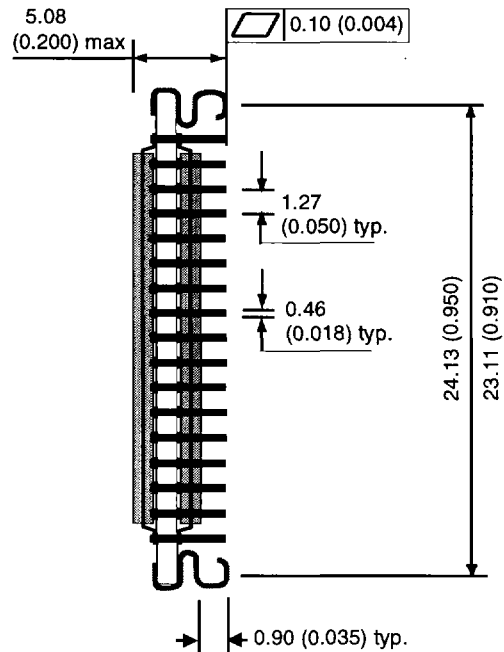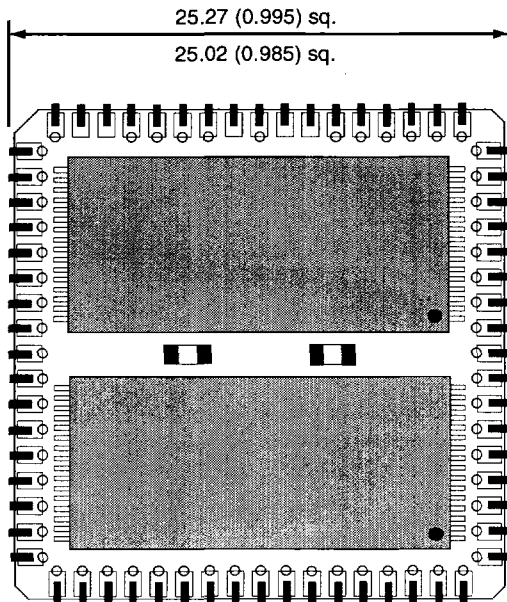

Ordering Information

PUMA 68F16001AM - 12

