


Flyback Transformer

44002SB




ELECTRICAL SPECIFICATIONS @ 25° C

Turns Ratio (Pri : Sec1 : Sec2 : Sec3)	Primary Inductance uH min	Leakage Inductance uH max	Pri DCR mOhm max	Sec1 DCR mOhm max	Sec2 DCR mOhm max	Sec3 DCR Ohm max
1 : 0.4 : 1.67 : 2.93	30.0	1.0	80	25	600	1.2

SCHEMATIC

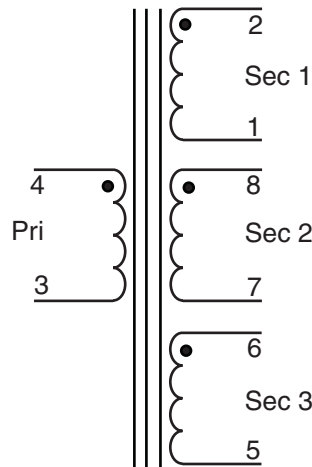

MECHANICAL

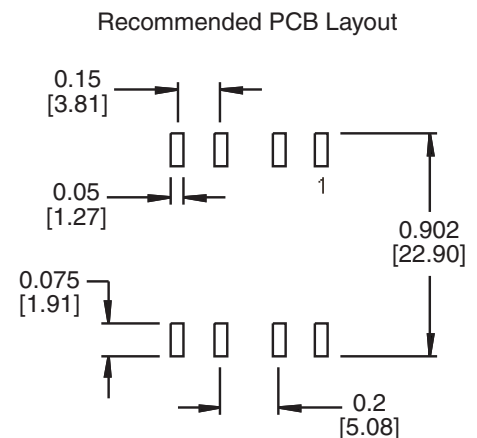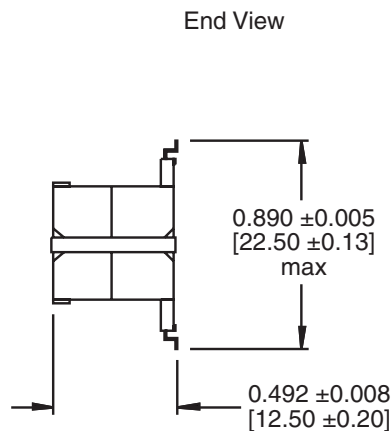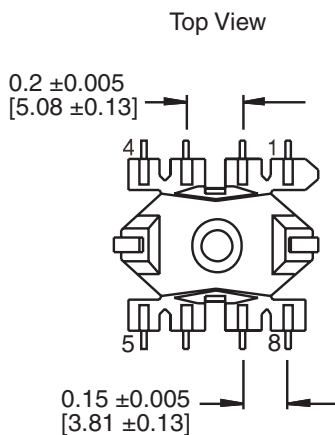

©2003 Bel Fuse Inc. Specifications subject to change without notice. 07.01.03

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Stewart Connector
45/46 Riverside
Medway City Estate
Rochester, Kent ME2 4DP U.K.
Tel 44-1634-722890
Fax 44-1634-716677
www.belfuse.com