


- Notes: Finish (Plating Thickness In Micro-Inches)
1. Brass Per QQ-B-626
 2. Gold PL 5 Min. Over Nickel PL 70 Min. Thick Over Copper Strike
 3. Gold PL 30 Min. Over Nickel PL 70 Min. Thick Over Copper Strike
 4. Teflon MIL-P-19468
 5. Beryllium Copper Per QQ-C-530
 6. Brass JIS H 3250, C 2700

No.	Description	Material	Finish	Q'ty
7	Ferrule	Note 6	Note 2	1
6	Cover	Note 1	Note 2	1
5	Insulator	Note 4	White	1
4	C Ring	Note 5	Note 2	1
3	Contact Pin	Note 1	Note 3	1
2	Insulator	Note 4	White	1
1	Body	Note 1	Note 2	1

1. Crimped Ferrule Hex Crimp Size .128"
2. Contact Pin To Solder

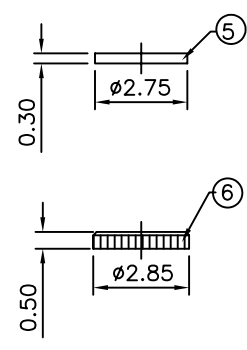

Part No.	Cable Group
MMCX-PCR17450	RG-174/U
MMCX-PCR18850	RG-188A/U
MMCX-PCR31650	RG-316/U

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°
PART No. △ MMCX-PCRXXX50		CHECKED BY BECKY		
DRAWING No. MMCX-PCRXXX50		DRAWING BY TCF		
SCALE	NONE	REV.	A1	
		UNIT	mm	

NO.	REV.	REVISIONS	CHK	DATE
△ A1		MMCX-PCRXXX -- MMCX-PCRXXX50	BECKY	2005/04/27
△ A0		NEW RELEASE	BECKY	