

| N3200BA-L600 | N Plug Clamp | 50Ω | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---------------------|--|-------|----------|---------------------|---------|-------|--|-------------|-------|--|--------|-------|--|-----------|--------|--|---------------|-------|--|--------|---------|--|--------------|-------|--|-------------|-------|--------------------------------------|------|-------|--|--------------|-------|--|
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">Parts</th> <th style="width: 20%;">Material</th> <th style="width: 60%;">Plating(Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Nut Hex</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Braid Clamp</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Washer</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Retainer Ring</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Gasket</td> <td>Silicon</td> <td></td> </tr> <tr> <td>Contact Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Contact Pin</td> <td>Brass</td> <td>Gold 5 Over Nickel 50 Over Copper 50</td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Coupling Nut</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> </tbody> </table> | | | Parts | Material | Plating(Micro-inch) | Nut Hex | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | Braid Clamp | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | Washer | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | Insulator | Teflon | | Retainer Ring | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | Gasket | Silicon | | Contact Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | Contact Pin | Brass | Gold 5 Over Nickel 50 Over Copper 50 | Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | Coupling Nut | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Parts | Material | Plating(Micro-inch) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Nut Hex | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Braid Clamp | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Washer | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Insulator | Teflon | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Retainer Ring | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Gasket | Silicon | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Contact Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Contact Pin | Brass | Gold 5 Over Nickel 50 Over Copper 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Coupling Nut | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Weight: Suitable Cables: LMR600, JBY600</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

N3200BA-L600

JYE BAO CO., LTD.

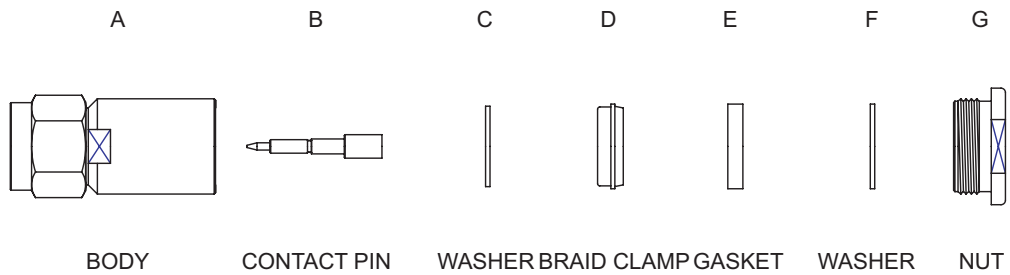

| DIAGRAM | ASSEMBLY INSTRUCTION |
|---------|---|
| | Step 1: STRIP AS SHOWN . |
| | Step 2: SLIDE BRAID CLAMP " D " ,GASKET " E " , WASHER " F " AND NUT " G " OVER CABLE . |
| | Step 3: WRAP THE BRAIDING BACKWARD OVER BRAID CLAMP " D " . |
| | Step 4: SLIDE WASHER " C " IN PLACE. Step 5: STRIP AS SHOWN . |
| | Step 6: PUT PIN " B " ON CENTER CONDUCTOR AND CRIMP IN " Y " . |
| | Step 7: FINALLY SCREW NUT " G " ON THE CONNECTOR BODY " A " . |

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.