
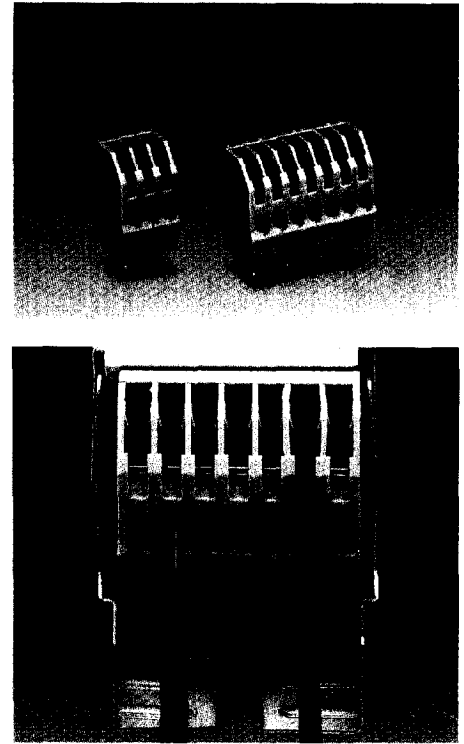


Pin spacing 3.5 mm / 0.138 in
 0.5 – 1.5 mm² "s" ① | AWG 20 – 16 "sol."
 7.5 – 8.5 mm / 0.31 in
 0.5 mm² "s" ② | AWG 20 "sol."
 500 V/4 kV/2, 2 A max. press-in force IDC 70 N

CCA®

WAGOS00004

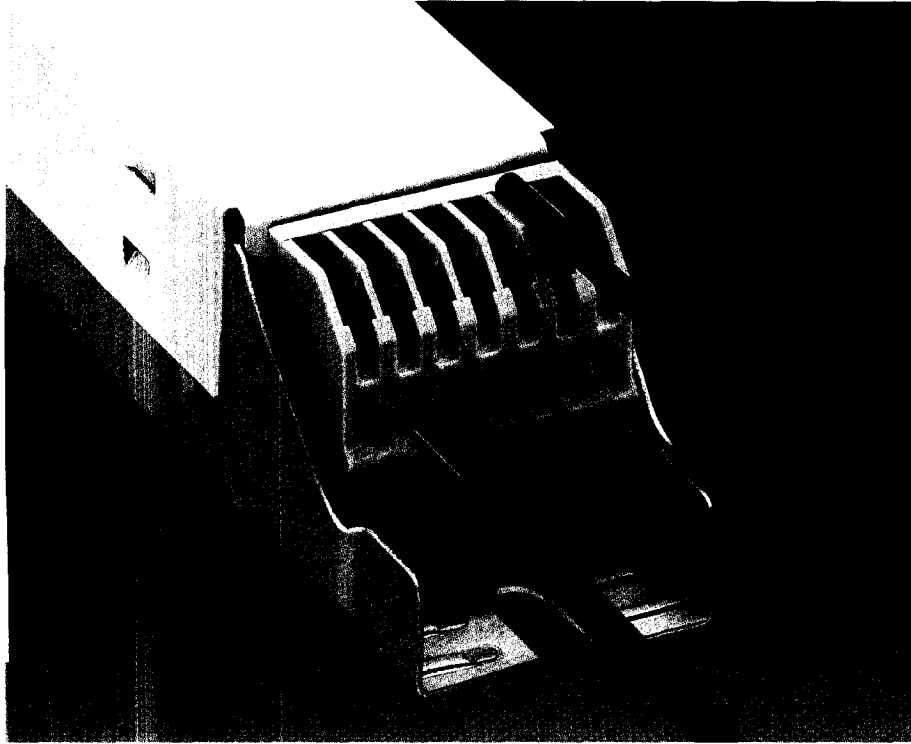

Description	No. of poles	Item-No.	Item-No.	No. of poles	Item-No.	Item-No.
Combi PCB terminal block, with IDC and push-wire connection		white	blue		orange	grey
	2	251-102	251-112	2	251-122	251-132
	3	251-103	251-113	3	251-123	251-133
	4	251-104	251-114	4	251-124	251-134
	5	251-105	251-115	5	251-125	251-135
	6	251-106	251-116	6	251-126	251-136
	7	251-107	251-117	7	251-127	251-137
		Other no. of poles – contact factory		Other no. of poles – contact factory		

Dimensions (in mm) Length = (No. of poles x pin spacing) + 0.9 mm Diameter of drilled hole: 1.2⁻⁰¹ mm

