


Specifications

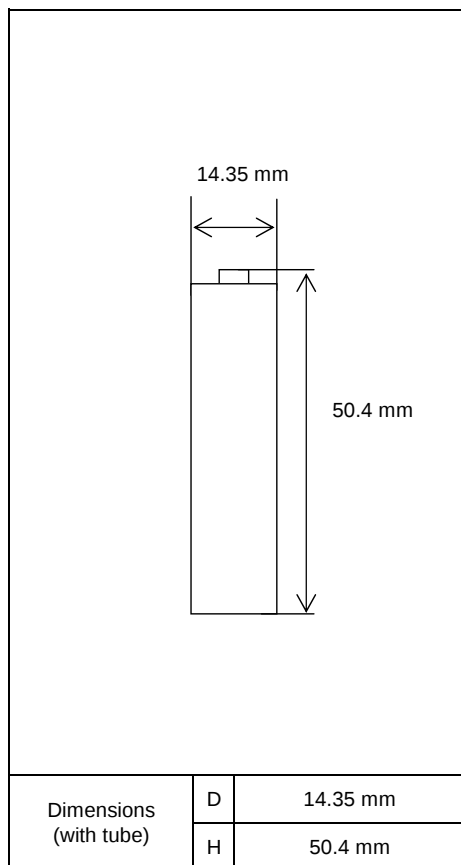

Type : Nickel-Metal Hydride Battery			Size : AA Consumer Type	
Capacity ¹⁾	Typical		2500mAh	
	Minimum		2300mAh	
Nominal Voltage			1.2V	
Charging Current x Time		Fast Charge ²⁾	2500mA × 1.1h	
Ambient Temp.	Charge Condition	Fast Charge ²⁾	0℃ - 40℃	
	Discharge Condition		0℃ - 50℃	
	Storage Condition	Less than 30days	-20℃ - 50℃	
		Less than 90days	-20℃ - 40℃	
		Less than 1year	-20℃ - 30℃	
Internal Impedance ³⁾ (after discharge to E.V.=1.0V)			Approx. 25mΩ (at 1000Hz)	
Weight ⁴⁾			Approx. 30 g	
Size ⁴⁾ :(Diameter) x (Height)			14.35(D) x 50.4(H) mm	

1) Single cell capacity under the following condition.

Charge : 250mA×16h, Discharge : 500mA(E.V.=1.0V) at 20°C


2) Use recommended charging system.

3) After a few charge and discharge cycles under the above 1) condition.

4) With tube.

Typical Characteristics

Charge

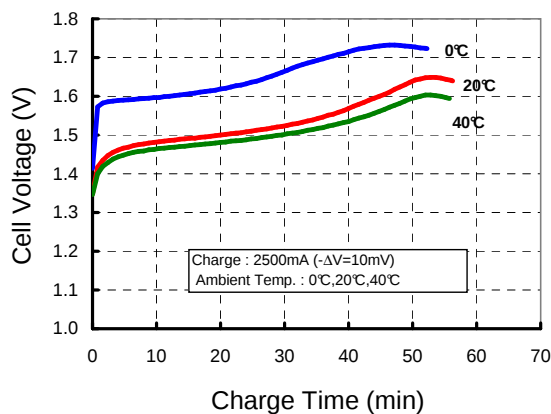

Discharge

