

Autotransformer AT3 3,5-58/60-4



Picture shows AT3 2-20/21-4


Advantages

| |
|--|
| Reverse mode possible |
| Very high efficiency |
| Patented assembly technology to lower heat losses |
| Very good corrosion protection and low noise thanks to BLOCK IMPEX vacuum impregnation |
| Fixed, contact protected screw connection terminals complying with UVV BGV A3 |
| Multifunctional fixing rails with 12 oval slots |
| Enlarged fixing rail for easy installation from above |
| Integrated crane eyes |

Applications

Autotransformer for adjustment of the voltage on the input and output sides with no requirement for electrical isolation.

Sample application

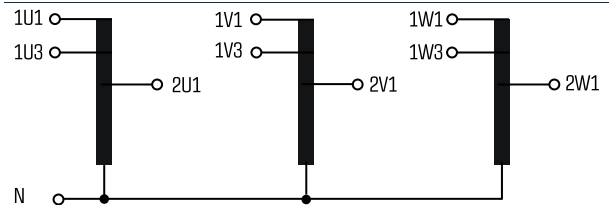

Standards

Autotransformer
to: VDE 0570 Teil 2-13, DIN EN 61558-2-13, EN 61558-2-13,
IEC 61558-2-13, UL 5085-1/-2, CSA 22.2 No.66

Approvals



UL 5085-1/-2, CSA 22.2 No.66



Autotransformer AT3 3,5-58/60-4



Electrical data

| Type | AT3 3,5-58/60-4 |
|--------------------------|-------------------------|
| Input | |
| Rated input voltage | 3 x 575/600 Vac |
| Rated frequency | 50 - 60 Hz |
| Output | |
| Rated output voltage | 3 x 400 Vac |
| Rated Power | 3,500 VA |
| Vector group | YNΔ0 |
| Efficiency | 92.0 % |
| Approvals | |
| Approvals | cURus |
| Environment | |
| Ambient temperature max. | 40 °C |
| Safety and protection | |
| Type | Open type |
| Insulation class | F |
| Protection index | IP 00 |
| Safety class (prepared) | I |
| Short circuit strength | non-short-circuit proof |
| Test voltage | 4,000 Vac, 50 Hz |
| Order numbers | |
| Recommended enclosure | BGUK 20 |
| Order Number | AT3 3,5-58/60-4 |



Mechanical data

| Type | AT3 3,5-58/60-4 |
|-----------------------|----------------------------|
| Terminal and mounting | |
| Fixing method | Mounting brackets |
| Fixing screws | M6 |
| Terminals | Screw-type terminals |
| Terminals Input | Screw clamp, 4 mm² |
| Terminals Output | Screw clamp, 4 mm² |
| Terminals PE | Screw-type terminal, 4 mm² |
| Measures and weights | |
| Core type | 3 UI 114/40 |
| Weight | 14.2 kg |

