



1			2			3			4			5			6			7			8		
REVISIONS																							
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE																					






RECOMMENDED CABLE STRIPPING DIM'S



RECOMMENDED MOUNTING HOLE

- FERRULE CRIMPING TOOLS P/N
227-944 (M22520/5-01)
227-1221-03A (M22520/5-03A) HEX: 3.25 L=8.25
- INNER CONTACT TO SOLDER
- PACKAGING IN TRAY (QTY: 80) WITH COMMERCIAL PART NUMBER AND DATE CODE
- CONNECTOR ACCORDING TO NFC 93-570, UTEC 93-570

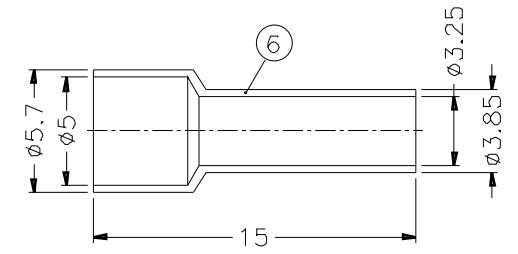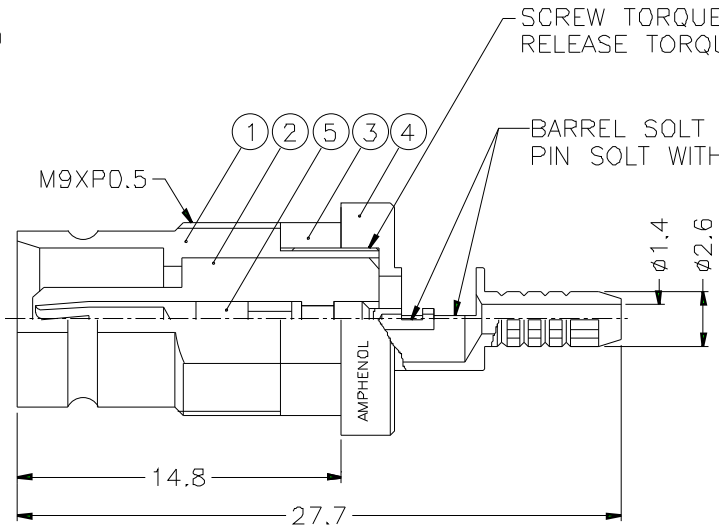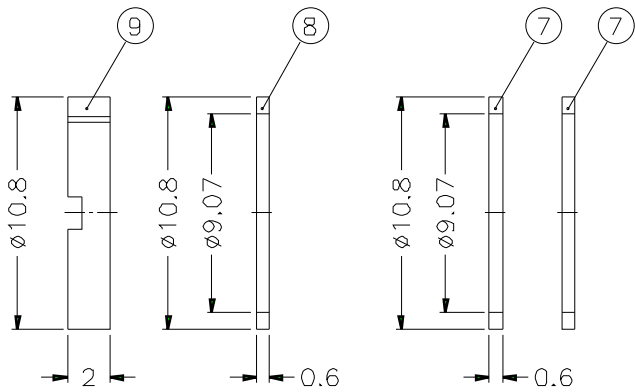

- PANEL THICKNESS:
- 1.2mm(GROUNDED OR ISOLATED)
 - 3mm(ONLY GROUNDED, WITHOUT WASHERS
⑦ AND ⑧)

9	NUT	BRASS	NICKEL	1	
8	WASHER	BRASS	NICKEL	1	
7	ISOLATING WASHER	EPOXY GLASS -FR4 TYPE	NATURAL	2	
6	FERRULE	COPPER	NICKEL	1	
5	CONTACT PIN	BEUC	GOLD	1	
4	BARREL	BRASS	NICKEL	1	
3	RING	PSU.20% G.F.	GREEN	1	
2	INSULATOR	TEFLON	NATURAL	1	
1	BODY	BRASS	GOLD	1	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

PART NO.	156 931 08P	
APPROVED	DATE	10-11-01'
CHECKED	DATE	10-11-01'
DRAWN	DATE	10-11-01'
FILE NO.		

Amphenol

TITLE 1.6/5.6 75Ω BULKHEAD MOUNT JACK (FOR MINI WRAPP CABLE)

DRAWING NO. ITEM NO.