


DASH NO. M CODE MADE FROM

GSD

REVISIONS

ISSUE	CHANGES
2	CN 26213 L AJ 27 JUN 84
3	CN 38247 GDH 12 MAR 01

86-66-41

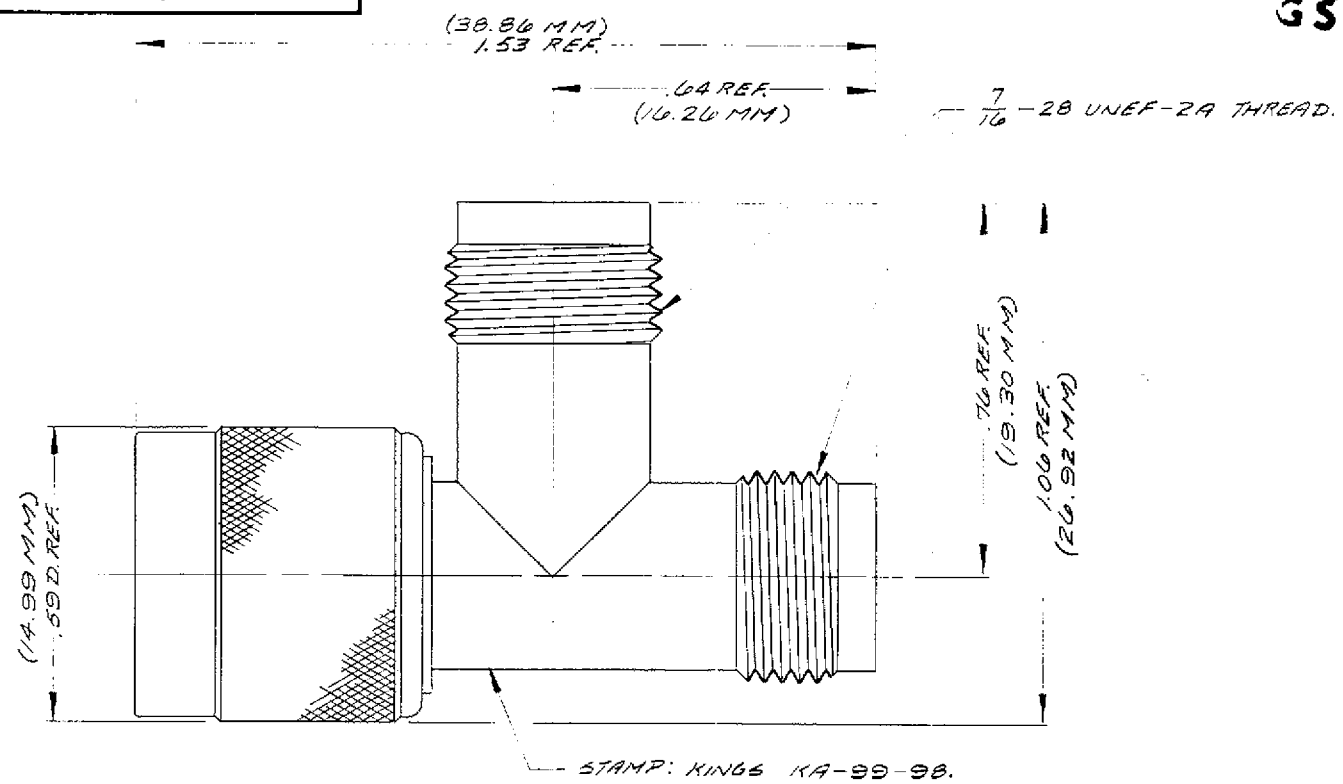

GSD

SCALE 4:1

APPROX. SURFACE AREA

USED ON

REF

TNC TEE
ADAPTER M-F-F

DRAWN	CT	DATE	13NOV85
APPR	VLS	DATE	11/19/85
APPR	-	DATE	-

KINGS
ELECTRONICS CO., INC.
FLUSHING, NEW YORK 11352

KA-99-98

GSD

NOTES:

1. MATERIALS:
 - GASKET - SILICONE RUBBER, ZZ-R-705.
 - C-RING - PHOSPHOR BRONZE, QQ-B-750.
 - INSULATORS - TEFLON, L-P-403.
 - CENTER CONTACTS - BER. COPPER, QQ-C-530.
 - OUTER CONTACT - ALL OTHER METAL PARTS - BRASS, QQ-B-426.

2. FINISHES:
 - ALL METAL PARTS - SILVER PLT. PER, QQ-S-305.
3. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE - 50Ω.
 - FREQUENCY RANGE - DC TO 11GHz.
 - WORKING VOLTAGE - 500 VOLTS RMS.

UNLESS OTHERWISE SPECIFIED:

- | | |
|--|--|
| 1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010 | 2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX. |
| 3 PLACE DECIMALS ± .004 | 3. NO FILLETS PERMITTED. |
| ANGLES ± 0°30' | 4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX. |
| T I R CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES | 5. ALL DIMENSIONS PRIOR TO PLATING. |
| | 6. ALL PLATING IN ACCORDANCE WITH KER 10004. |