

product: DELPHI PN 13647787

material: CUNISI **SEALED**

surface: G.AG

material thickness: 0,60 mm

cross section [mm²]: 13,0

strip length: 7,00 mm

cable type: STX

insulation ø [mm]: 6,63 - 6,89

seal: DPN 15470809

**Uncontrolled
Copy**
For Information only!


conductor dimension					crimp dimension [mm]					
cable type	cross sect. [mm ²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation			
					height ± 0,10	width ± 0,10	height ± 0,20	width ± 0,20	height ± tol.	width ± tol.
STX	13,0	75 x 0,45	6,76	1300	3,80	6,45	9,80	10,35		

core:
C-6.25-6.5-24
DPN 10783289


insulation:
IS-10.00-5.0-24-A
DPN 10805234

anvil:

two piece anvil:
AC-6.25-6.75
DPN 10804779
AI-10.00-7.2-2.0
DPN 10764219

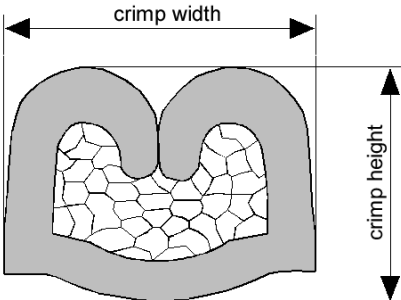

DELPHI PN 13647787

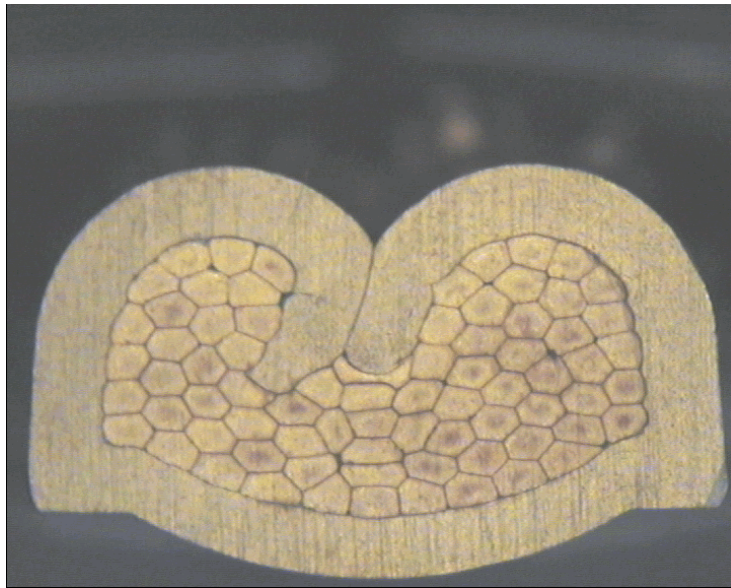

cable:

13,00 mm² = 75 x 0,45 mm

crimp height:

3,80 mm

crimp width:

6,45 mm