

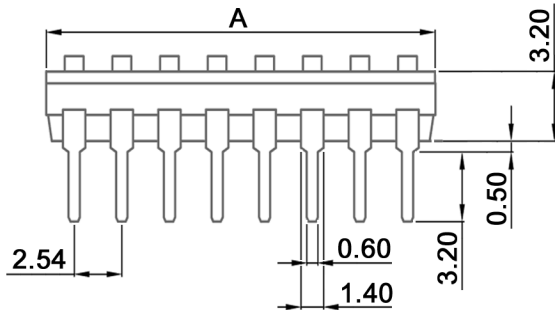


P.C.B. LAYOUT

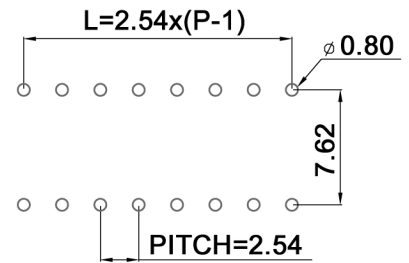

PART No.	POLE	A	L	pieces per tube
DBS 9101	1	2.98	0	170
DBS 9102	2	5.52	2.54	95
DBS 9103	3	8.06	5.08	65
DBS 9104	4	10.60	7.62	48
DBS 9105	5	13.14	10.16	39
DBS 9106	6	15.68	12.70	33
DBS 9107	7	18.22	15.24	28
DBS 9108	8	20.76	17.78	25
DBS 9109	9	23.30	20.32	22
DBS 9110	10	25.84	22.86	20
DBS 9112	12	30.92	27.94	17

Specifications:

- Contact rating: switching: 25mA, 24V DC
non-switching: 100mA, 50V DC
- Contact resistance: 50mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC
- Dielectric strength: 500V DC for 1 minute
- Operating temperature: -40°C to +85°C
- Storage temperature: -40°C to +85°C
- Mechanical / electrical life: 3 000 cycles
- Operating force: 1 000g max.
- Soldering conditions: wave soldering: 265 +/-5°C, 10sec. max.
- Travel: 0.9mm
- Material: Cover / base: PPS (UL94V-0), black
Raise actuator: PA 66 (UL94V-0), white
Terminal / movable contact: 1u" gold plated
Terminal: 1u" gold plated



Tolerances:	Date	Name	<h1>DBS 9100</h1>
	11/07	dr	
			<h2>30 12 74</h2>
Modifications	Date	Name	knitter-switch
			Page 1/1