

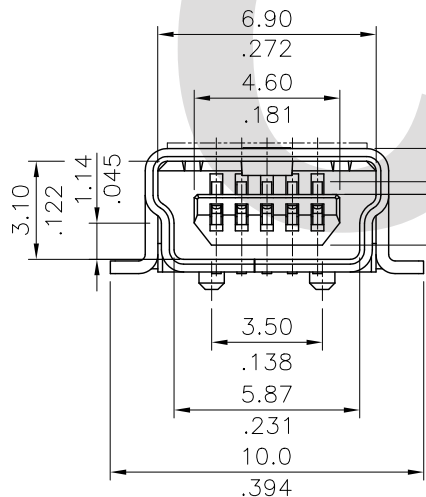


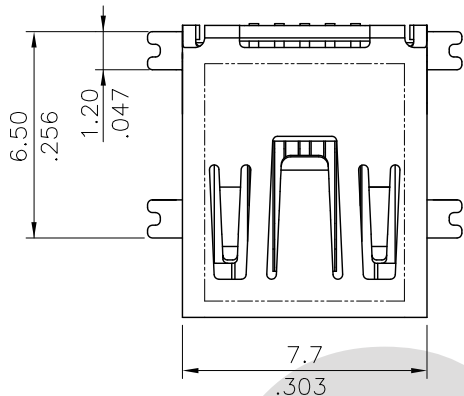

Materials :

- * Insulation: Glass filled Polyamide UL 94V-0
- * Contacts: Copper Alloy
- * Shell: Copper Alloy
- * Shell Plating:
120μ" Tin plated over 30μ" Nickel
- * Pick & Place Pad : Glass filled polyamide UL 94V-0

PICK & PLACE PAD
(Mylar)(Optional)

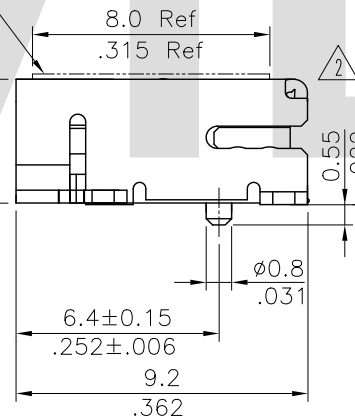

Ordering Code:

CU04 S C M 1 5 B H -T0 -LF
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Series No.

② S= Socket

③ Plating option:

C= Selective 0.76μm(30μ") Gold plated
over 1.27μm(50μ") Nickel

④ Tail style: M= SMT Type

⑤ Insulator Color: 1= Black

⑥ No of Circuits: 5= 5 Pin

⑦ Type: B= Mini USB 5 Pin Type-B

⑧ Option: H= HRS Type


⑨ Packing Option:

-R0= Tape & Reel Packing
(With Pick & Place Pad)

-T0= Tube Packing

⑩ Other option:

LF= For Lead Free IR Processes

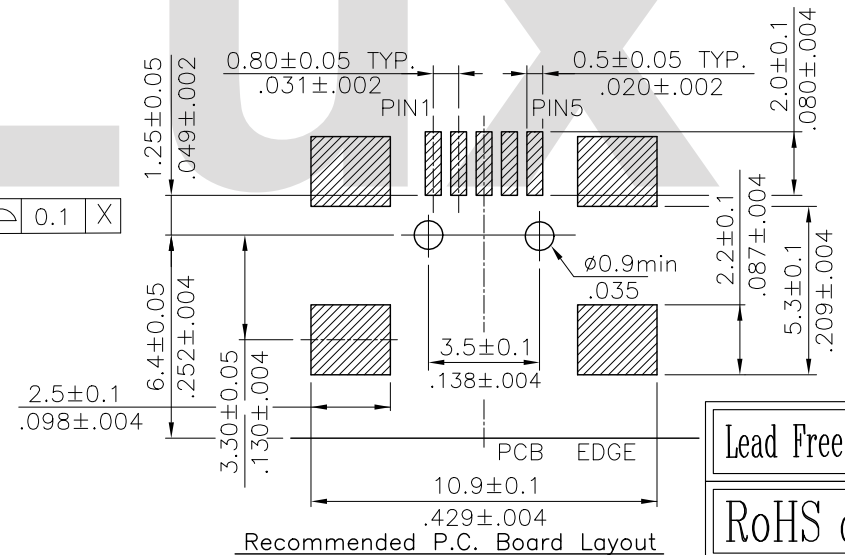

Lead Free Process

RoHS Compliant

Recommended P.C. Board Layout

④				CVILUX CORP 2010.06.08 ISSUED		DATE	UNIT: mm / inch		TITLE: MINI USB 5 PIN SMT BOARD MOUNT CONNECTOR (HRS TYPE)	 瀚荃股份有限公司 CviLux Corporation			
③	Karen	5/24-10'	ECN10083		DRAWN BY:	Karen	6/1-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
②	Sansy	4/13-07'	ECN07082/ECR07035-0		ENGINEER:	Clark	6/1-10'	.X ± 0.20/.008	X' ± 1'	MATERIAL:			
①	Jim	12/4/06'	ECN06443		CHECKED BY:	Eisley	6/2-10'				.XX ± 0.10/.004	.X' ±	CUSTOMER: F5T0063
SYM	NAME	DATE	REVISIONS		APPROVED BY:	David	6/2-10'	.XXX ± 0.05/.002	.XX' ±				
DRAWING NO.		CU0420SD		PART NO.		CU04SCM15BH-*0-LF							
SCALE		4 / 1		SHEET		1 OF 1							

CVILUX CORP

2010.06.08

ISSUED