SPECIFICATIONS

Contact rating:	Silver - 5 amps, 125VAC or 28VDC - 3 amps, 250VAC Gold - 0.4 amps, 20VAC/VDC
Contact material:	Copper alloy
Contact resistance:	10 milliohms max at 2-4 VDC, 100 mA
Case material:	DAP, UL94V-0
Insulation resistance:	1,000 megohms min.
Withstanding:	1,500 VRMS
Actuator material:	Nylon, UL94V-0
Housing material:	Stainless steel
Switch support:	Brass or steel, tin plated
Durability:	30,000 cycles min.
Operating temperature:	-30°C to +85°C
Approvals:	UL and c-UL (CSA)
Category:	T80-S
UL file:	E123142



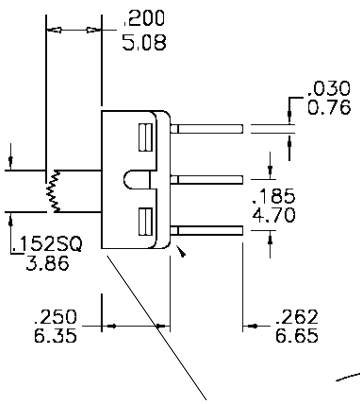

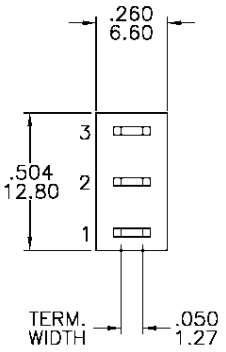

P.C. MOUNTING







Series	Style	Actuator	Color	Terminal	Plating Contact/Terminal	Support Bracket	Options
SWT	TSXX	A1	BK	C	XX	XX	X
Switch	13=SPDT (on/on) 11=DPDT (on/on) 14=SPDT (on/off/on) 12=DPDT (on/off/on)	A1 type actuator	BK=Black	C type terminal	SV=Silver GD=Gold	[blank]=None S20=With bracket	[blank]=None E=Epoxy sealed

RoHS compliant

Rev.	Description	Date	Approved

Drawing	Name	Date
Approved	Howard	09/30/03
Checked	Lizzy	09/30/03
Drawn	Tina	09/30/03

0.0 ± 0.35 0.00 ± 0.20 Angles ± 3'

UNIT: mm

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **SWT-TS-13-A1-BK-C-XX-XX-X**

Description: Slide switch