

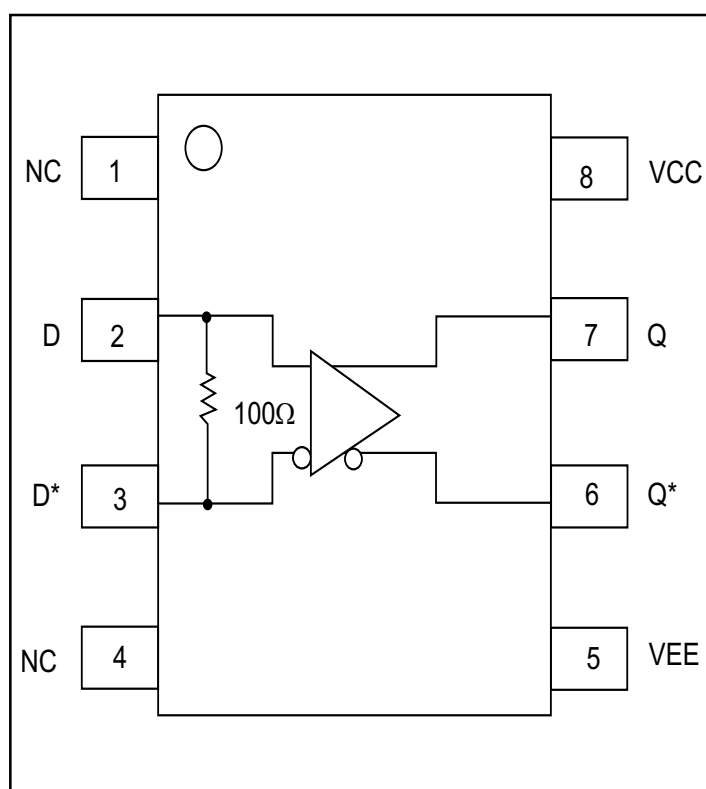
HIGH-PERFORMANCE PRODUCTS
Description

SK1303 is a true differential LVDS Receiver/Driver. This device is designed to support frequency rates in excess of 800 MHz. SK1303 operates over an extended supply range of 3.0V to 5.5V and has a 100 Ω onchip termination resistor across its differential inputs.

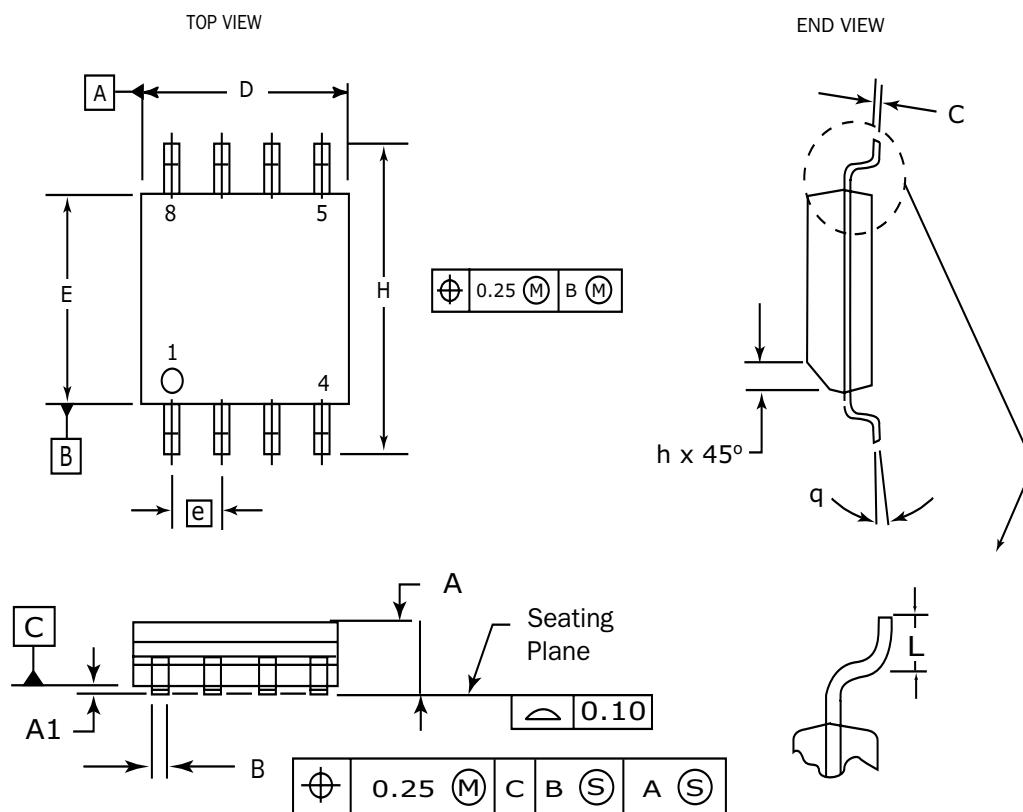
When the differential LVDS inputs are left open or floating, the output Q will be at a logic LOW and Q* at a logic HIGH.

Features

- Extended Supply Voltage Range: (VCC = 3.0V to 5.5V; VEE = 0V)
- 800 MHz Minimum Toggle Frequency
- Typical 350 mV Differential LVDS Inputs/Outputs
- Onchip 100 Ω Input Termination Resistor
- ESD Protection > 4000V
- Specified Over Industrial Temperature Range: -40°C to 85°C
- Available in both 8 pin SOIC and MSOP Packages
- Flammability Rating: UL-94 Code V-0
- Moisture sensitivity: Level 1

Functional Block Diagram

Pin Descriptions

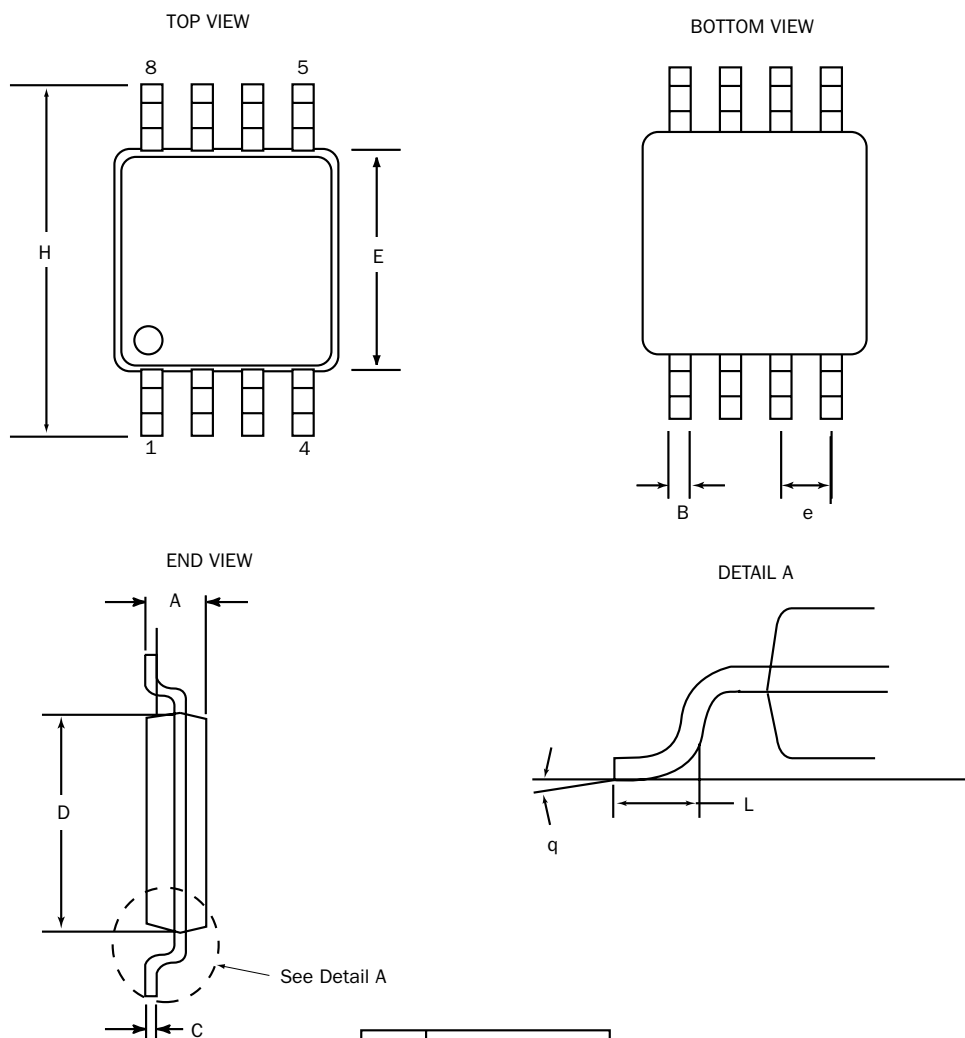
Pin Name	Function
D, D*	Differential LVDS inputs
Q, Q*	Differential LVDS Outputs

8 Pin SOIC Package


DIM	MILLIMETERS	
	MIN	MAX
A	1.35	1.75
A1	0.10	0.25
B	0.33	0.51
C	0.19	0.25
D	4.80	5.00
E	3.80	4.00
e	1.27 BSC	
H	5.80	6.20
h	0.25	0.50
L	0.40	1.27
θ	0°	8°

NOTES:

1. Dimensions are in millimeters.
2. Dimensions D and E do not include mold protrusion.
3. Maximum mold protrusion 0.15 per side.
4. Dimension B does not include Dambar protrusion. Allowable Dambar protrusion shall be 0.127 total in excess of the B dimension at maximum material condition.

8 Pin MSOP Package


DIM	MILLIMETERS	
	MIN	MAX
A	0.94	1.1
B	0.25	0.40
C	0.13	0.23
D	2.90	3.10
E	2.90	3.10
e	0.65	BSC
H	4.75	5.1
L	0.4	0.7
θ	0°	6°

NOTES:

1. Dimensions are in mm
2. Controlling dimension: mm
3. Dimension does not include mold flash or protrusions, either of which shall not exceed 0.20

HIGH-PERFORMANCE PRODUCTS

Absolute Maximum Ratings

Symbol	Parameter	Value	Unit
V_{EE}	Power Supply ($V_{CC} = 0V$)	-6.0 to 0	V
V_{CC}	Power Supply ($V_{EE} = 0V$)	6.0 to 0	V
V_I	Input Voltage ($V_{CC} = 0V$, V_I not more negative than V_{EE})	-6.0 to 0	V
V_I	Input Voltage ($V_{EE} = 0V$, V_I not more positive than V_{CC})	6.0 to 0	V
I_{OUT}	Output Current Continuous Surge	50 100	mA mA
T_A	Operating Temperature Range	-40 to +85	°C
T_{stg}	Storage Temperature	-65 to +150	°C
θ_{JA} for SOIC	Thermal Resistance (Junction-to-Ambient) Still Air 500 lfpm	153.7 130	°C/W °C/W
θ_{JC} for SOIC	Thermal Resistance (Junction-to-Case)	41.2	°C/W
θ_{JA} for MSOP	Thermal Resistance (Junction-to-Ambient) Still Air 500 lfpm (>2 layers)	206.3 140	°C/W °C/W
θ_{JC} for MSOP	Thermal Resistance (Junction-to-Case)	39.1	°C/W
T_{sol}	Solder Temperature (<2 to 3 seconds: 245°C desired)	265	°C

* Maximum Ratings are those values beyond which damage to the device may occur.

DC Characteristics

SK1303 LVDS Input DC Electrical Characteristics

($V_{CC} = +3.0V$ to $+5.5V$; $V_{EE} = 0V$)

Symbol	Characteristic	$T_A = -40^\circ C$			$T_A = 0^\circ C$			$T_A = +25^\circ C$			$T_A = +85^\circ C$			Unit
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
V_{IH}	Input High Voltage	0.9		2.6	0.9		2.6	0.9		2.6	0.9		2.6	V
V_{IL}	Input Low Voltage	0.65		2.40	0.65		2.40	0.65		2.40	0.65		2.40	V
R_{IN}	Input Impedance	79	100	121	79	100	121	79	100	121	79	100	121	Ω
V_{PP}	Minimum Peak-to-Peak Input Swing	100		1000	100		1000	100		1000	100		1000	mV
I_{CC}	Supply Current			45			45			45			45	mA

HIGH-PERFORMANCE PRODUCTS
DC Characteristics (Continued)
SK1303 LVDS Outputs DC Electrical Characteristics

(VCC = +3.0V to +5.5V; VEE = 0V)

Symbol	Characteristic	TA = - 40°C			TA = 0°C			TA = + 25°C			TA = + 85°C			Unit
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
V _{OH}	Output High Voltage	1.25		1.8	1.25		1.8	1.25		1.8	1.25		1.8	V
V _{OL}	Output Low Voltage	0.95		1.5	0.95		1.5	0.95		1.5	0.95		1.5	V
R _O	Output Impedance	15		70	15		70	15		70	15		70	Ω
DV _{OUT}	Peak-to-Peak Voltage ¹	250	350	470	250	350	470	250	350	470	250	350	470	mV

AC Characteristics
SK1303 AC Electrical Characteristics

(VCC = +3.0V to +5.5V; VEE = 0V)

Symbol	Characteristic	TA = - 40°C			TA = 0°C			TA = + 25°C			TA = + 85°C			Unit
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
F _{MAX}	Max Toggle Frequency ²	800			800			800			800			MHz
t _{PLH} t _{PHL}	Propagation Delay D to Q	450	595	740	450	600	750	470	615	760	500	650	800	ps
t _r , t _f	Output Rise/Fall	150	335	520	150	240	330	150	240	330	160	250	340	ps

Notes:

1. DV_{OUT} is obtained as follows: Voltages of Q and Q* outputs with respect with V_{EE} are measured. The absolute difference between the high and the low is equal to DV_{OUT}.
2. 250 mV minimum output peak-to-peak swing per Max. toggle frequency.

Application Notes
AN1004 - Interfacing Between LVDS and ECL / LVECL / PECL / LVPECL

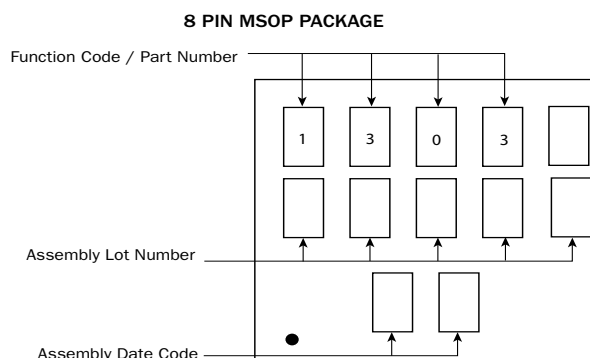
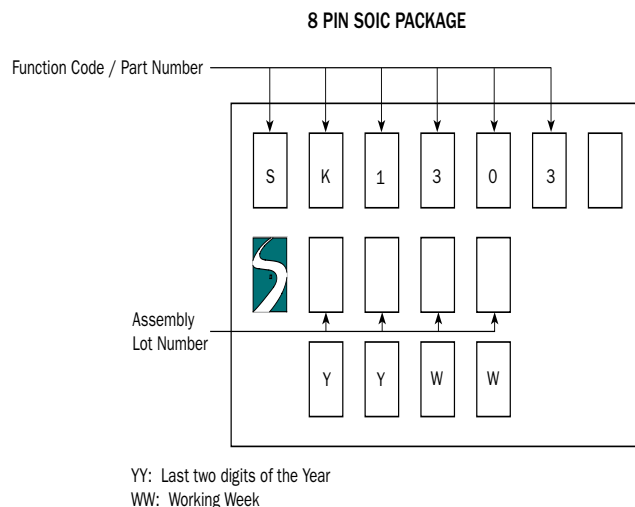
HIGH-PERFORMANCE PRODUCTS

Ordering Information

Ordering Code	Package ID
SK1303D	8-SOIC
SK1303DT	8-SOIC
SK1303MS	8-MSOP
SK1303MST	8-MSOP

The letter “T” stands for tape and reel. For tape and reel information refer to the HPP Part Ordering Information Data Sheet.

Marking Information



Contact Information

Division Headquarters
10021 Willow Creek Road
San Diego, CA 92131
Phone: (858) 695-1808
FAX: (858) 695-2633

Semtech Corporation High-Performance Products Division

Marketing Group
1111 Comstock Street
Santa Clara, CA 95054
Phone: (408) 566-8776
FAX: (408) 566-8759