



THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.






TOLERANCE:
XX ±0.01 IN
.XXX ±0.006
.XXXX ±0.002
MM
X: ±0.25
XX: ±0.15
XXX: ±0.05

ISSUE NUMBER	
ORIGINAL	①
DM: 0.612(15.55) WAS 0.63(16.0)	⑥
0.439(11.15) WAS 0.445(11.30)	⑥
0.153(3.90) WAS 0.146(3.70)	⑥
ADD DIM: 0.238(6.04), 0.207(5.25)	
0.177(4.5), 0.078(2.0), 0.024(0.60)	
RSTAMONICA JUN.10/2010	
0.333(8.45) AND 0.306(7.78) WAS 0.372(9.45) AND 0.331(8.40)	⑦
F.BRIONES OCT.08/10	

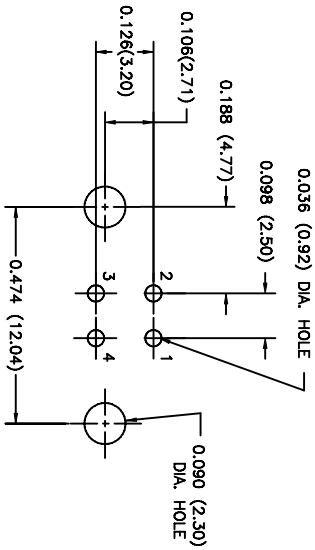

PC BOARD MOUNTING DIMENSIONS

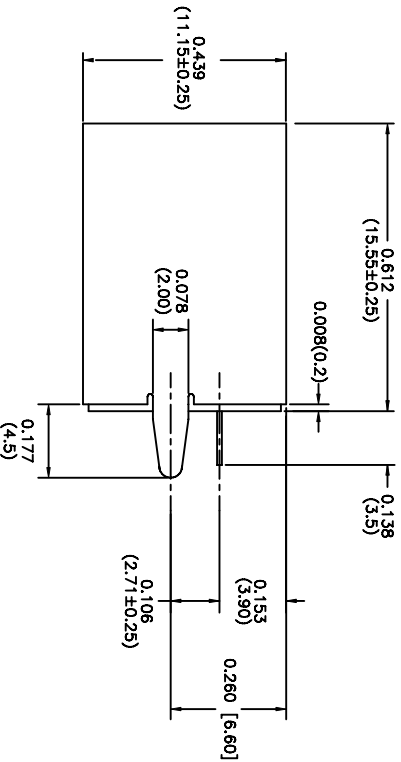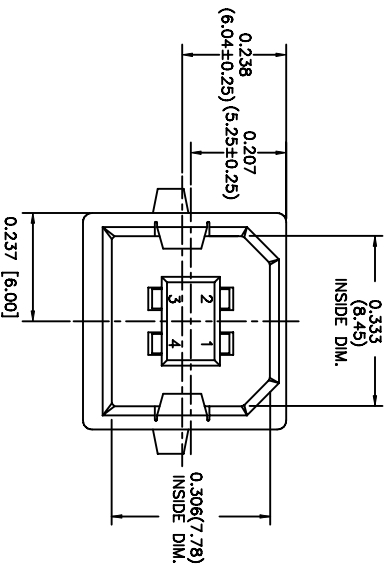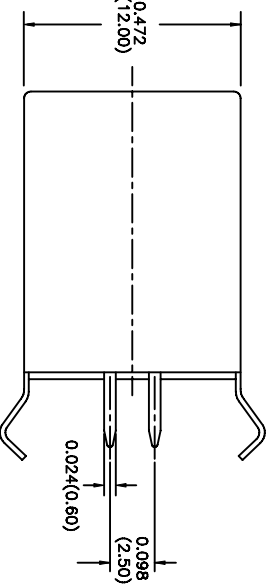

MATERIAL:
HOUSING: PBT GLASS FILLED, WHITE COLOR
CONTACTS: PHOSPHOR BRONZE, GOLD PLATED ON CONTACT AREA WITH TIN PLATING ON TAIL
SHELL: BRASS, NICKEL PLATED
BOTTOM COVER: PBT GLASS FILLED WHITE COLOR
CONTACT PLATING GOLD PLATING PART NO.
GOLD FLASH 690-004-260-023
15 MICRONS OF GOLD 690-004-360-023
30 MICRONS OF GOLD 690-004-660-023

PART NUMBER: 690-004-260-023

CONTACT CODE _____

- SPECIFICATIONS:
1. CONTACT RESISTANCE: 30 MOHM MAX
 2. INSULATION RESISTANCE: 1000MOHM MIN AT 500VDC
 3. RATED VOLTAGE AND CURRENT: 1.5A @ 250VAC MIN.
 4. DIELECTRIC WITHSTANDING VOLTAGE: 500VAC (RMS) FOR 1MIN
 5. INSERTION FORCE: 35N MIN
 6. EXTRACTION FORCE: 10N MIN



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR ROHS COMPLIANCY.

USB CONNECTOR B TYPE, VERTICAL, SINGLE DECK

ACAD REFERENCE NO. 690-004-260-023

DRAWN: J.CHOW DATE: OCT 16/98

CHECKED: DATE:

SCALE: (IN C.A.D. 1:1) SHEET 1 OF 1

DRAWING NUMBER ISSUE

690-004-260-023 7

EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.