


C-CPS-6982700-03-700D

Coaxial Power Splitter | 698-2700 MHz | DIN-Female | 3-way

Electrical Characteristics		
Frequency bands	698-2700 MHz	
Insertion loss	≤ 5.2 dB	
VSWR	≤ 1.25	
Intermodulation (2x43 dBm)	≤ -150 dBc	
Ripple	≤ 0.4 dB	
Power Rating	700 W	
Impedance	50Ω	
Temperature range	-35° to 75° C	-31° to 167° F
Connector(s)	DIN Female	
Mechanical Characteristics		
Dimensions Length x Width x Depth	252 x 82 x 38 mm	9.9 x 3.2 x 1.5 in
Net Weight	1.2 kg	2.6 lbs
Applications	IP65	

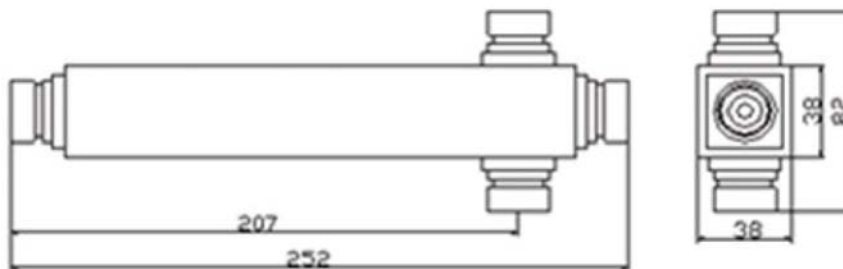

Quoted performance parameters are provided to offer typical or range values only and may vary as a result of normal manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to product may be made without notice.