

PCB Terminal Blocks

ST-331

Specifications: **ST-331**

Features:

- Tri-barrier construction
- Mounting ends available
- UL recognized
- Accepts 12 AWG

Electrical:



Current: 20A @ 300V
 Wire Range: 12-22 AWG
 Operating temp: -40°C - +105°C
 Withstanding: 2000V AC per min.
 IR: >500MΩ (500V DC)
 Torque: 7 lb-in.

Materials:

Housing: Polyamide 66 UL94V-0
 Terminal: Brass, Tin plated
 Screw: M3 combo head w/captive sem plate
 Screw material: Steel, Ni plated
 Positions available: 2-32

20A 300V

8.25mm

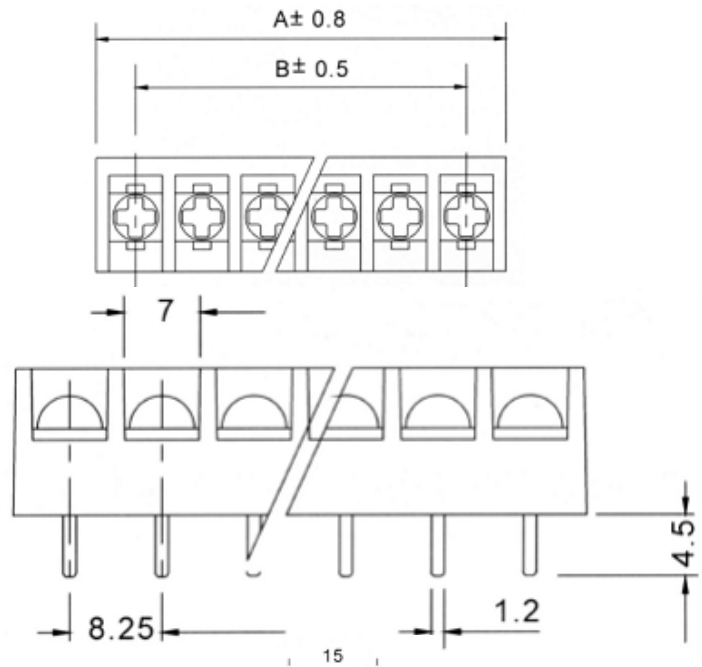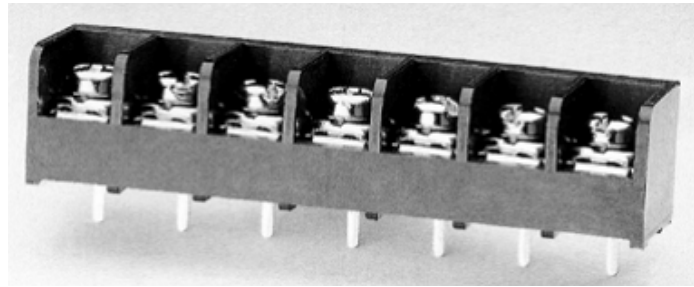

POLE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A		17.70	25.90	35.00	43.25	51.50	59.75	68.00	76.25	84.50	92.75	101.00	109.25	117.50	125.75	134.00
B		8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50	123.75
POLE	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A	142.25	150.50	158.75	167.00	175.25	183.50	191.75	200.00	208.25	216.50	224.75	233.00	241.25	249.50	257.75	266.00
B	132.00	140.25	148.50	156.75	165.00	173.25	181.50	189.75	198.00	206.25	214.50	222.75	231.00	239.25	247.50	255.75

ST-33□-□P□

BlockMaster Electronics, Inc.

(800) 595-8881

www.blockmaster.com