

MA2B027 Series (MA27 Series)

Silicon epitaxial planar type variable resistor


For temperature and reduced voltage compensation

■ Features

- High reliability achieved through combination of a planar type chip and glass sealing structure
- Easy mounting because of employing DO-35 (DHD) envelope
- Extremely small reverse current I_R
- Large power dissipation
- Wide forward voltage V_F range

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Reverse voltage (DC)	V_R	6	V
Forward current (DC)	MA2B0270A/B	I_{FM}	mA
	MA2B027WA/WB		
	MA2B027TA/TB		
	MA2B027QA/QB		
Power dissipation	P_D	150	mW
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

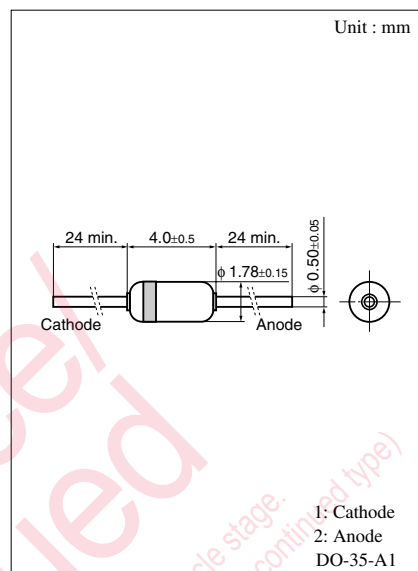

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse current (DC)	I_R	$V_R = 6\text{ V}$			10	μA
		$V_R = 6\text{ V}$			1	
Forward voltage (DC)	MA2B0270A	$I_F = 1.5\text{ mA}$	0.56		0.61	V
	MA2B0270B		0.59		0.64	
	MA2B027WA/WB	$I_F = 10\text{ }\mu\text{A}$	0.77			
	MA2B027TA/TB		1.15			
	MA2B027QA/QB		1.60			
Forward voltage (DC)	MA2B0270A/B	$I_F = 50\text{ mA}$			1.1	V
	MA2B027WA		1.18		1.28	
	MA2B027WB	$I_F = 3\text{ mA}$	1.26		1.36	
	MA2B027TA		1.76		1.92	
	MA2B027TB		1.88		2.04	
	MA2B027QA		2.20		2.40	
	MA2B027QB		2.34		2.54	
Temperature coefficient of forward voltage	MA2B0270A/B	$-\Delta V_F / \Delta T$	$I_F = 1.5\text{ mA}$	2.0		mV/ $^\circ\text{C}$
	MA2B027WA/WB		$I_F = 3\text{ mA}$	4.6		
	MA2B027TA/TB			6.5		
	MA2B027QA/QB			8.8		

Note) Rated input/output frequency: 100 MHz



■ Cathode Indication

Type No.	MA2B0270A	MA2B0270B	MA2B027WA	MA2B027WB	MA2B027TA*	MA2B027TB*	MA2B027QA*	MA2B027QB*
Color	Yellow	Blue	Light Blue	Brown	Yellow	Blue	Green	Brown


Note) * : Body Color ; Black

Note) The part numbers in the parenthesis show conventional part number.




Characteristics charts of MA2B027

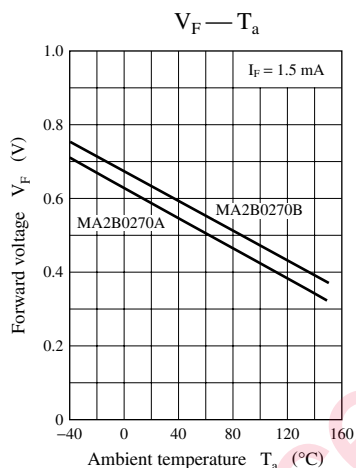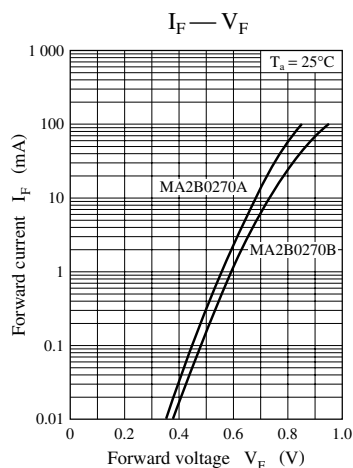



Characteristics charts of MA2B027Q

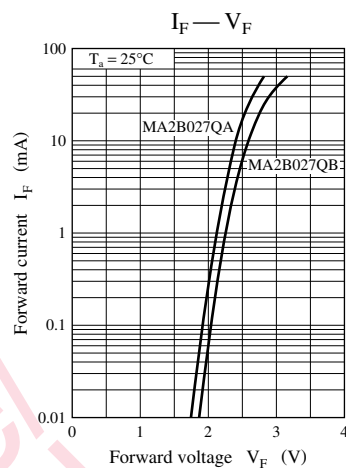

Characteristics charts of MA2B027W

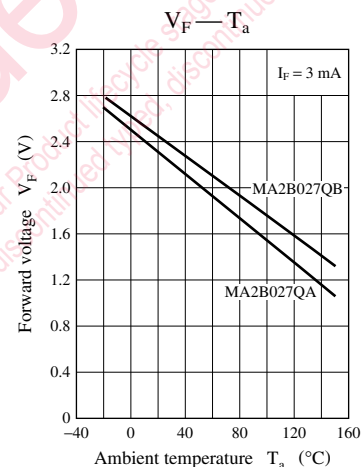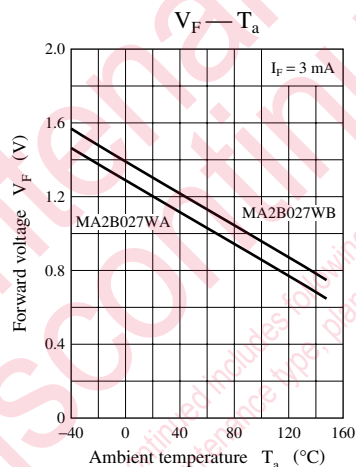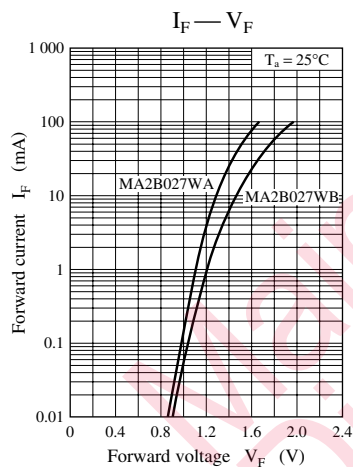

Characteristics charts of MA2B027T

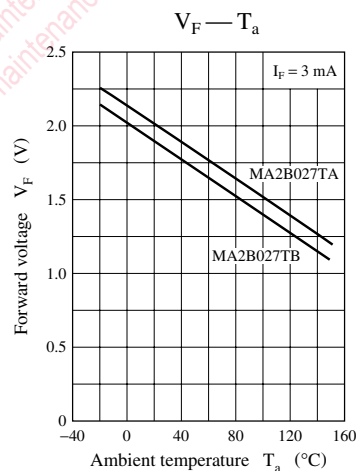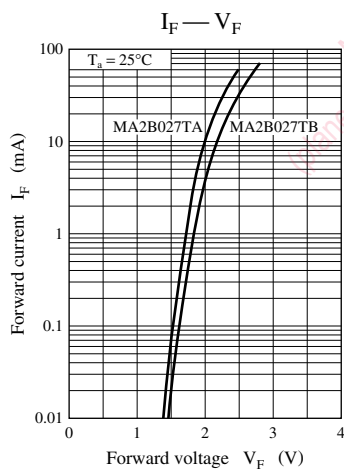

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.