

HM65256B Series

5.0 V Supply

32,768-word × 8-bit High Speed Psuedo Static RAM

Features


- Single 5 V ($\pm 10\%$)
- Access time
 - $\overline{CE}$ access time: 100/120/150/200 ns
 - Address access time: 50/60/75/100 ns (in static column mode)
- Cycle time
 - Random read/write cycle time: 160/190/235/310 ns
 - Static column mode cycle time: 55/65/80/105 ns
- Low power: 175 mW typ. active
- All inputs and outputs TTL compatible
- Static column mode capability
- Non-multiplexed address
- 256 refresh cycles (4 ms)
- Refresh functions
 - Address refresh
 - Automatic refresh
 - Self refresh

Type No.	Access time	Package
HM65256BLSP-10	100 ns	300-mil 28-pin plastic DIP (DP-28N)
HM65256BLSP-12	120 ns	
HM65256BLSP-15	150 ns	
HM65256BLSP-20	200 ns	
HM65256BFP-10T	100 ns	28-pin plastic SOP (FP-28DA)
HM65256BFP-12T	120 ns	
HM65256BFP-15T	150 ns	
HM65256BFP-20T	200 ns	
HM65256BLFP-10T	100 ns	
HM65256BLFP-12T	120 ns	
HM65256BLFP-15T	150 ns	
HM65256BLFP-20T	200 ns	

Ordering Information

Type No.	Access time	Package
HM65256BP-10	100 ns	600-mil 28-pin plastic DIP (DP-28)
HM65256BP-12	120 ns	
HM65256BP-15	150 ns	
HM65256BP-20	200 ns	
HM65256BLP-10	100 ns	
HM65256BLP-12	120 ns	
HM65256BLP-15	150 ns	
HM65256BLP-20	200 ns	
HM65256BSP-10	100 ns	300-mil 28-pin plastic DIP (DP-28N)
HM65256BSP-12	120 ns	
HM65256BSP-15	150 ns	
HM65256BSP-20	200 ns	

Pin Arrangement

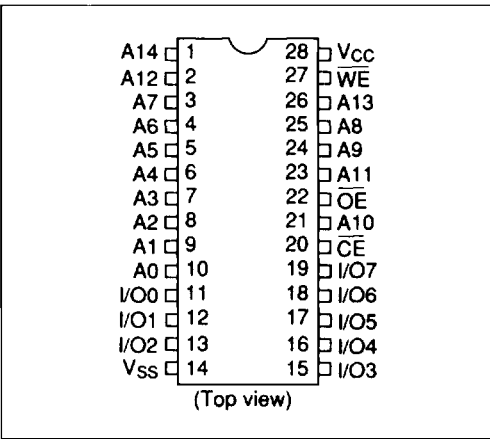


HITACHI

Hitachi America, Ltd. • Hitachi Plaza • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1819 • (415) 589-8300

HM65256B Series

Block Diagram

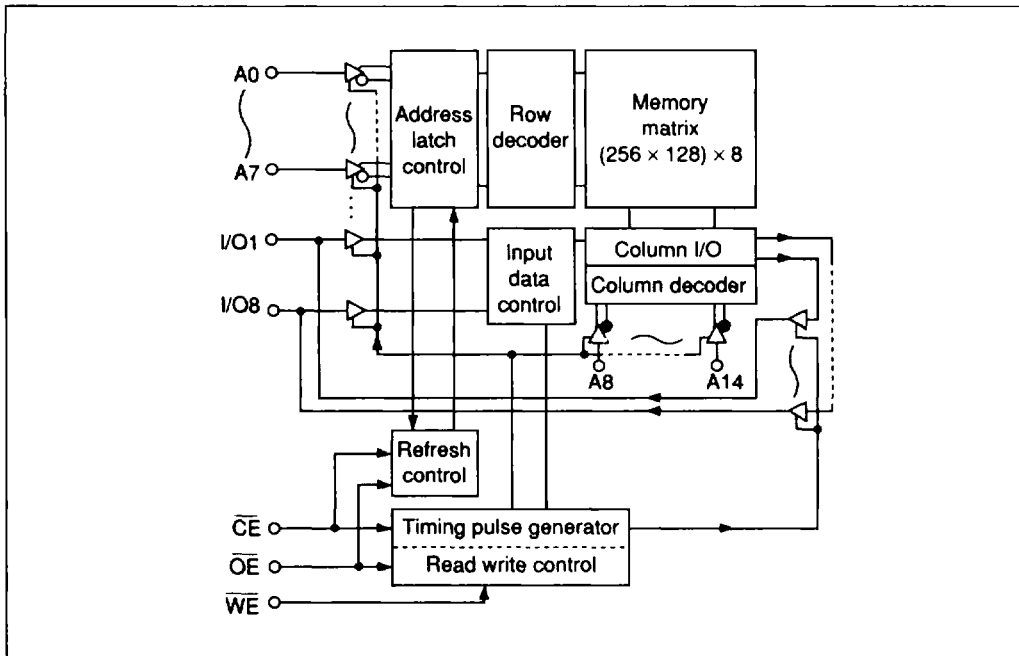

Truth Table

$\overline{CE}$	$\overline{OE}$	$\overline{WE}$	I/O Pin	Mode
L	L	H	Low Z	Read
L	x	L	High Z	Write
L	H	H	High Z	—
H	L	x	High Z	Refresh
H	H	x	High Z	Standby

HITACHI

Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Terminal voltage with respect to V_{SS}	V_T	-1.0 to +7.0	V
Power dissipation	P_T	1.0	W
Operating temperature	T_{opr}	0 to +70	°C
Storage temperature	T_{stg}	-55 to +125	°C
Storage temperature under bias	T_{bias}	-10 to +85	°C

Recommended DC Operating Conditions ($T_a = 0$ to +70°C)

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage	V_{CC}	4.5	5.0	5.5	V
	V_{SS}	0	0	0	V
Input voltage	V_{IH}	2.2	—	6.0	V
	V_{IL}	-0.5*	—	0.8	V

Note: V_{IL} min = -3.0 V for pulse width ≤ 10 ns.

HM65256B Series

DC Characteristics ($T_a = 0$ to $+70^\circ\text{C}$, $V_{CC} = 5\text{ V} \pm 10\%$)

Parameter	Symbol	HM65256B			HM65256BL			Unit	Test conditions
		Min	Typ	Max	Min	Typ	Max		
Operating power supply current	I_{CC1}	—	35	65	—	35	65	mA	$I_{I/O} = 0\text{ mA}$ $t_{cyc} = \text{min}$
Standby power supply current	I_{SB1}	—	1	2	—	1	2	mA	$\text{CE} = V_{IH}$, $\text{OE} = V_{IH}$, $V_{in} \geq 0\text{ V}$
	I_{SB2}	—	—	—	—	0.05	0.1	mA	$\text{CE} > V_{CC} - 0.2\text{ V}$, $\text{OE} \geq V_{CC} - 0.2\text{ V}$, $V_{in} \geq 0$
Operating power supply current in self refresh mode	I_{CC2}	—	1	2	—	0.6	1	mA	$\text{CE} = V_{IH}$, $\text{OE} = V_{IL}$, $V_{in} \geq 0\text{ V}$
	I_{CC3}	—	—	—	—	50	100	μA	$\text{CE} \geq V_{CC} - 0.2\text{ V}$, $\text{OE} \leq 0.2\text{ V}$, $V_{in} \geq 0\text{ V}$
Input leakage current	I_{LI}	-10	—	10	-10	—	10	μA	$V_{CC} = 5.5\text{ V}$, $V_{in} = V_{SS}$ to V_{CC}
Output leakage current	I_{LO}	-10	—	10	-10	—	10	μA	$\text{OE} = V_{IH}$, $V_{I/O} = V_{SS}$ to V_{CC}
Output voltage	V_{OL}	—	—	0.4	—	—	0.4	V	$I_{OL} = 2.1\text{ mA}$
	V_{OH}	2.4	—	—	2.4	—	—	V	$I_{OH} = -1\text{ mA}$

Capacitance

Parameter	Symbol	Typ	Max	Unit	Test conditions
Input capacitance	C_{in}	—	5	pF	$V_{in} = 0\text{ V}$
Input/output capacitance	$C_{I/O}$	—	7	pF	$V_{I/O} = 0\text{ V}$

Note: These parameters are sampled and not 100% tested.

HITACHI

AC Characteristics ($T_a = 0$ to $+70^\circ\text{C}$, $V_{CC} = 5\text{ V} \pm 10\%$)

AC Test Conditions:

- Input pulse levels: 2.4 V, 0.4 V
- Input rise and fall times: 5 ns
- Timing measurement level: 2.2 V, 0.8 V
- Reference level: $V_{OH} = 2.0\text{ V}$
 $V_{OL} = 0.8\text{ V}$
- Output load: 1 TTL and 100 pF
(including scope and jig)

Parameter	Symbol	HM65256B-10		HM65256B-12		HM65256B-15		HM65256B-20		Unit
		Min	Max	Min	Max	Min	Max	Min	Max	
Random read or write cycle time	t_{RC}	160	—	190	—	235	—	310	—	ns
Static column mode read or write cycle	t_{RSC}	55	—	65	—	80	—	105	—	ns
Chip enable access time	t_{CEA}	—	100	—	120	—	150	—	200	ns
Address access time	t_{AA}	—	50	—	60	—	75	—	100	ns
Output enable access time	t_{OEA}	—	40	—	50	—	60	—	75	ns
Chip disable to output in high Z	t_{CHZ}	—	25	—	25	—	30	—	35	ns
Chip enable to output in low Z	t_{CLZ}	30	—	30	—	35	—	40	—	ns
Output enable to output in low Z	t_{OLZ}	10	—	10	—	10	—	10	—	ns
Output disable to output in high Z	t_{OHZ}	—	25	—	25	—	30	—	35	ns
Chip enable pulse width	t_{CE}	100 ns 4 ms		120 ns 4 ms		150 ns 4 ms		200 ns 4 ms		
Chip enable precharge time	t_P	50	—	60	—	75	—	100	—	ns
Address set-up time	t_{AS}	0	—	0	—	0	—	0	—	ns
Row address hold time	t_{RAH}	20	—	20	—	25	—	30	—	ns
Column address hold time	t_{CAH}	100	—	120	—	150	—	200	—	ns
Read command set-up time	t_{RCS}	0	—	0	—	0	—	0	—	ns
Read command hold time	t_{RCH}	0	—	0	—	0	—	0	—	ns
Output enable hold time	t_{OHC}	0	—	0	—	0	—	0	—	ns
Output enable to chip enable delay time	t_{OCD}	0	—	0	—	0	—	0	—	ns
Output hold time from column address	t_{OH}	5	—	5	—	5	—	10	—	ns
Write command pulse width	t_{WP}	25	—	25	—	30	—	35	—	ns
Chip enable to end of write	t_{CW}	100	—	120	—	150	—	200	—	ns

HITACHI

Hitachi America, Ltd. • Hitachi Plaza • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1819 • (415) 589-8300

6-7

HM65256B Series

AC Characteristics (Ta = 0 to +70°C, V_{CC} = 5 V ± 10%) (cont)


Parameter	Symbol	HM65256B-10		HM65256B-12		HM65256B-15		HM65256B-20		Unit
		Min	Max	Min	Max	Min	Max	Min	Max	
Column address set-up time	t _{ASW}	0	—	0	—	0	—	0	—	ns
Column address hold time after write	t _{AHW}	0	—	0	—	0	—	0	—	ns
Data valid to end of write	t _{DW}	20	—	20	—	25	—	30	—	ns
Data in hold time for write	t _{DH}	0	—	0	—	0	—	0	—	ns
Output active from end of write	t _{OW}	5	—	5	—	5	—	5	—	ns
Write to output in high Z	t _{WHZ}	—	25	—	25	—	30	—	35	ns
Transition time (rise and fall)	t _T	3	50	3	50	3	50	3	50	ns
Refresh command delay time	t _{RFD}	50	—	60	—	75	—	100	—	ns
Refresh precharge time	t _{FP}	30	—	30	—	30	—	30	—	ns
Refresh command pulse width for automatic refresh	t _{FAP}	80	10000	80	10000	80	10000	80	10000	ns
Automatic refresh cycle time	t _{FC}	160	—	190	—	235	—	310	—	ns
Refresh command pulse width for self refresh	t _{FAS}	10000	—	10000	—	10000	—	10000	—	ns
Refresh reset time for self refresh	t _{FRS}	160	—	190	—	235	—	310	—	ns
Refresh period	t _{REF}	—	4	—	4	—	4	—	4	ns

- Notes:
1. t_{CHZ}, t_{OHZ}, and t_{WHZ} are defined as the time at which the output achieves the open circuit conditions.
 2. t_{CLZ}, t_{OLZ} and t_{OW} are sampled under the condition of t_T = 5 ns, and not 100% tested.
 3. A write occurs during the overlap of a low $\overline{CE}$ and low $\overline{WE}$.
 4. If $\overline{CE}$ goes low simultaneously with $\overline{WE}$ going low or after $\overline{WE}$ going low, the outputs remain in high impedance state.
 5. If input signals of opposite phase to the outputs are applied in a write cycle, $\overline{OE}$ or $\overline{WE}$ must disable output buffers prior to applying data to the device and data inputs must be floating prior to $\overline{OE}$ or $\overline{WE}$ turning on output buffers.
 6. V_{IH} (min.) and V_{IL} (max.) are reference levels for measuring timing of input signals. Also, transition times are measured between V_{IH} and V_{IL}.
 7. An initial pause of 100 μs is required after power-up followed by a minimum of 8 initialization cycles.
 8. At the end of self refresh, refresh reset time (t_{FRS}) is required to reset the internal self refresh operation of the RAM. During t_{FRS}, $\overline{CE}$ and $\overline{OE}$ must be kept high. If auto refresh follows self refresh, low transition of $\overline{OE}$ at the beginning of auto refresh must not occur during t_{FRS} period.

HITACHI


Timing Waveforms

Read Cycle (1) ($\overline{\text{CE}}$ controlled)

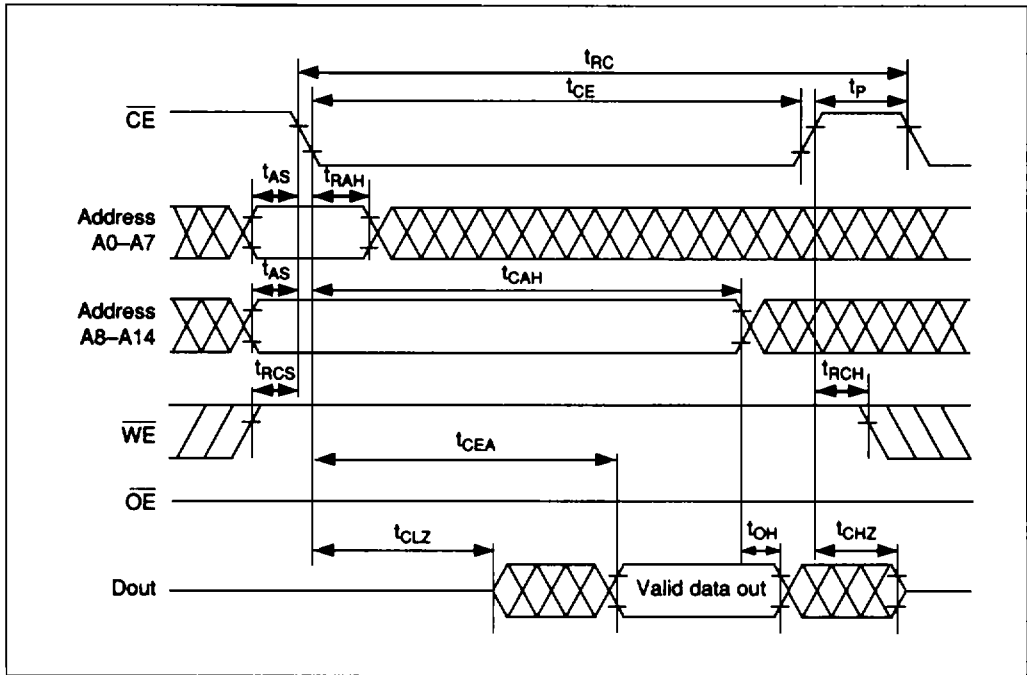


HM65256B Series

Read Cycle (2) ($\overline{\text{OE}}$ controlled)

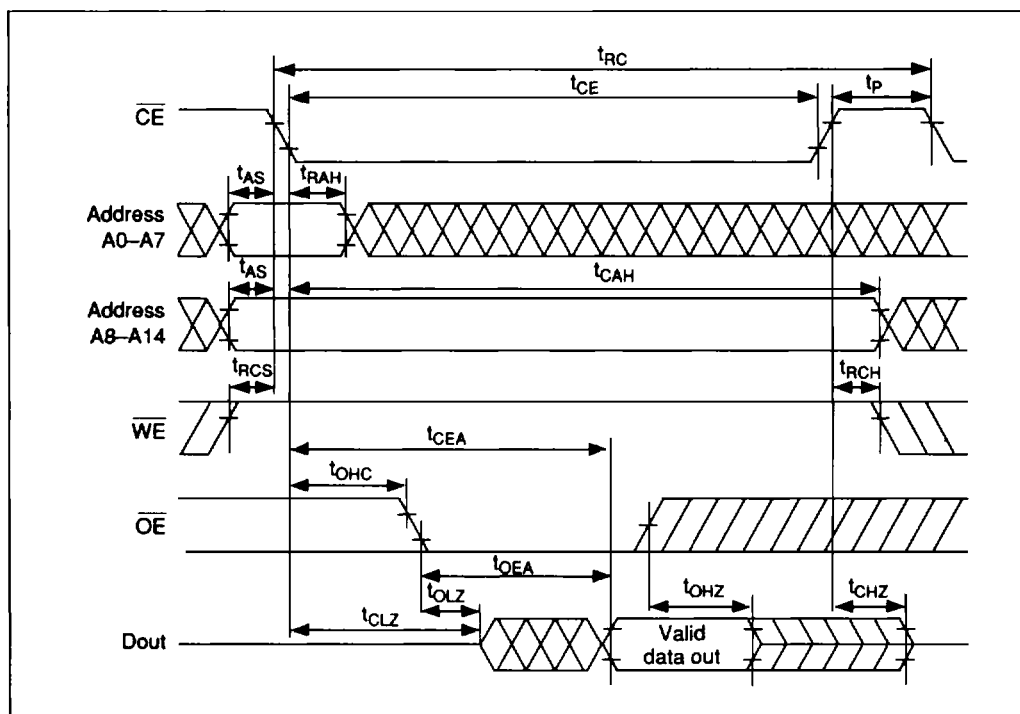


HITACHI

Write Cycle (1) ($\overline{OE}$ Clock)

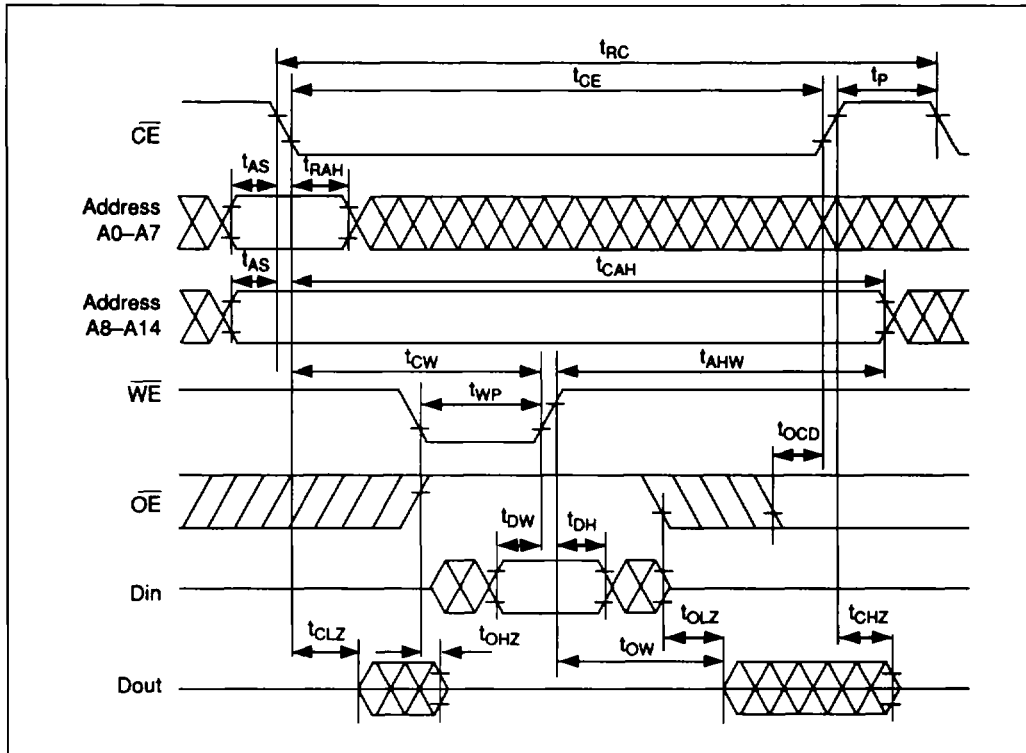


HM65256B Series

Write Cycle (2) ($\overline{OE}$ fixed low)

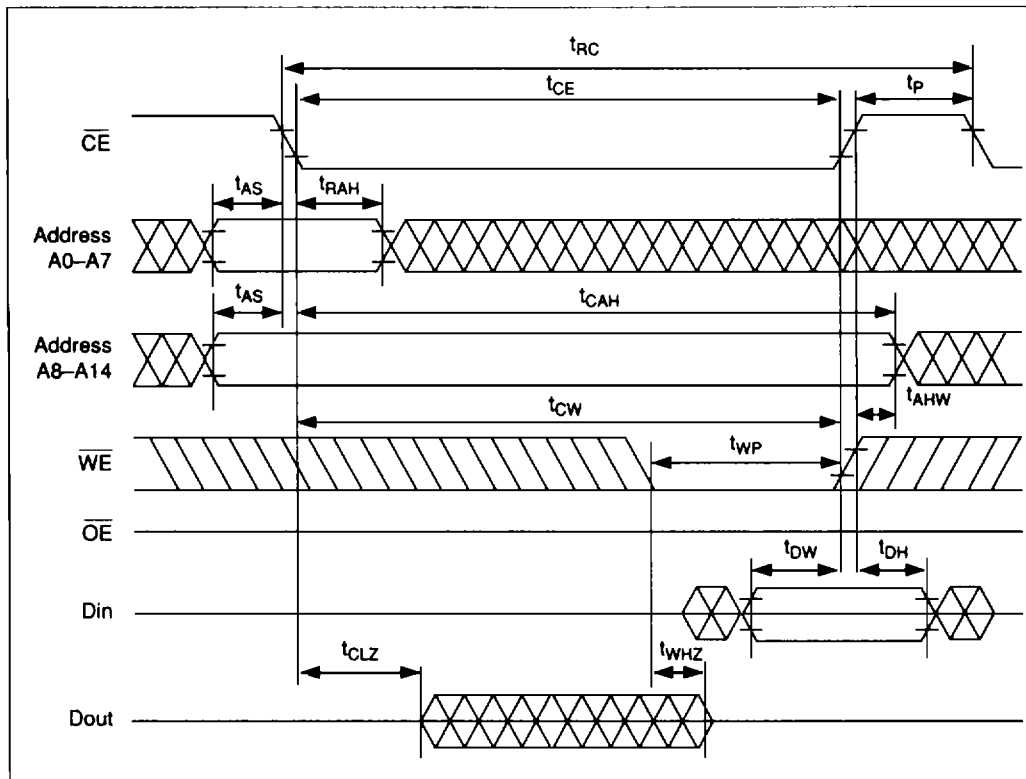


HITACHI

Static Column Mode Read Cycle

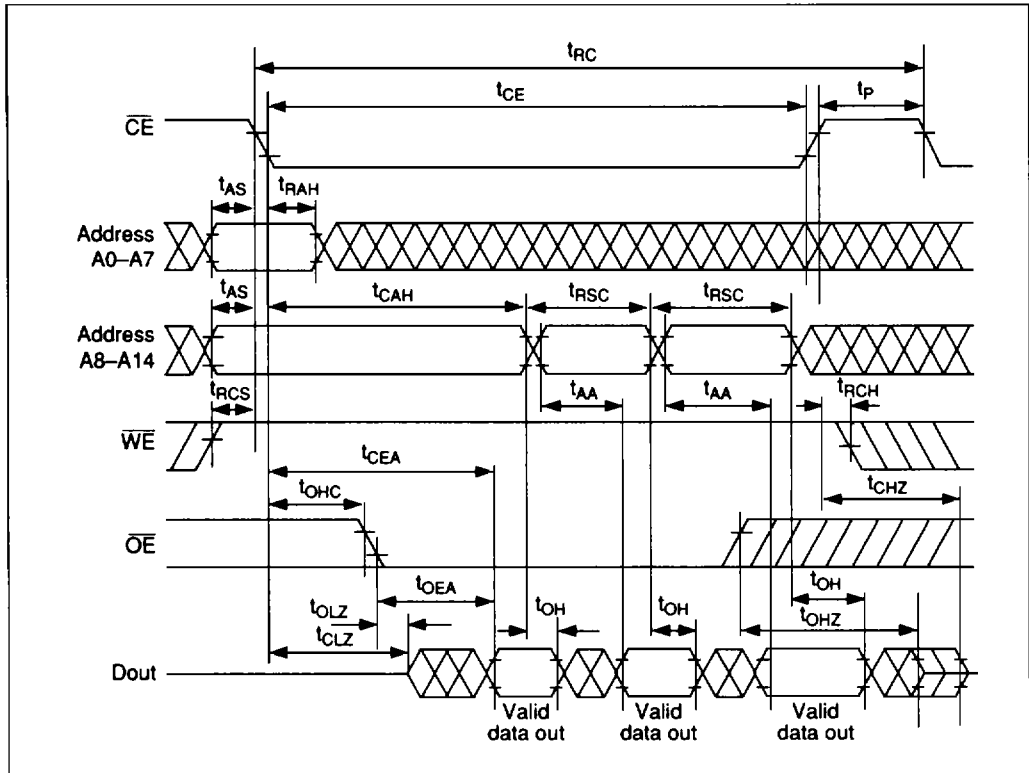


HM65256B Series


Static Column Mode Write Cycle

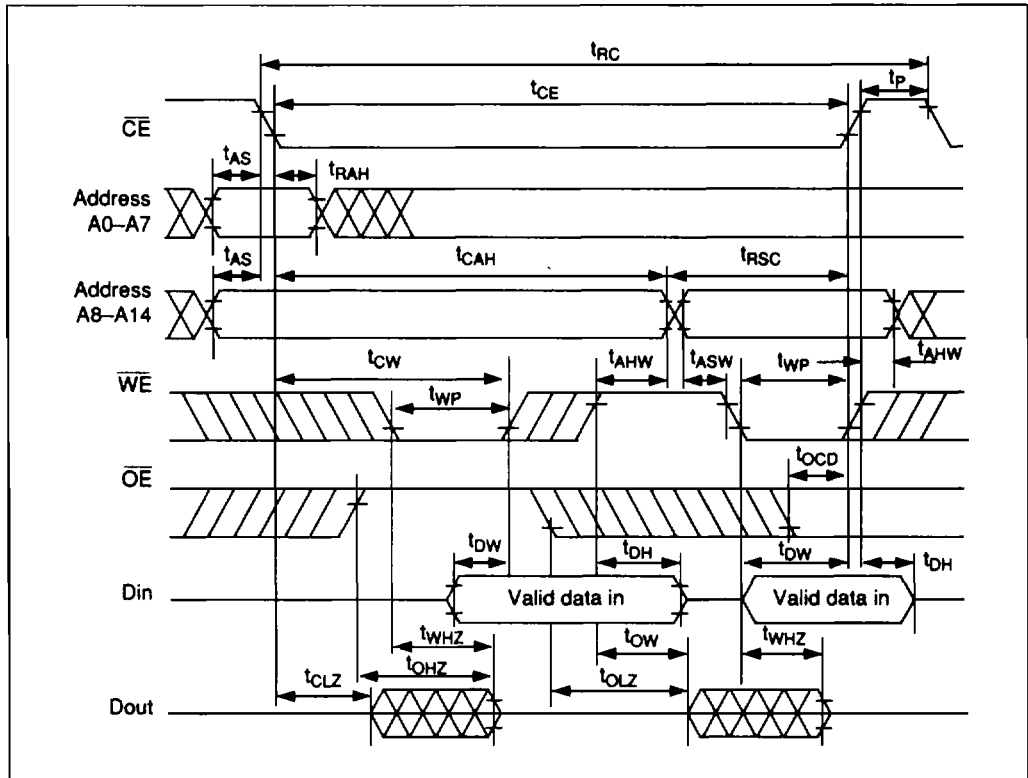

Automatic Refresh Cycle

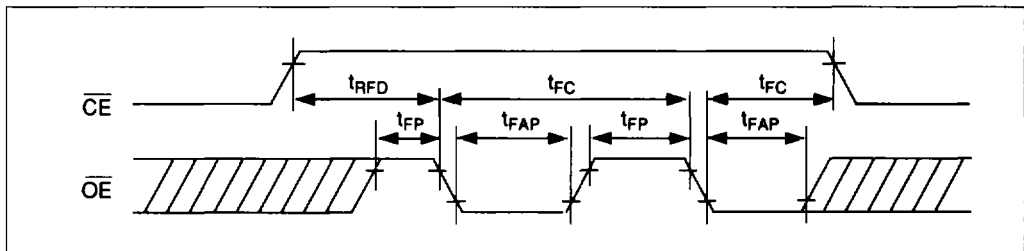

Self Refresh Cycle

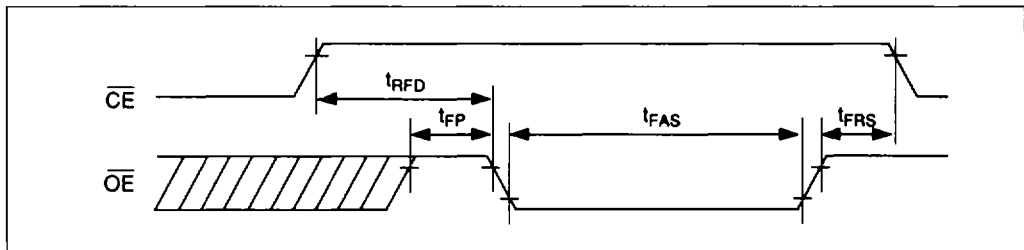

HITACHI