


This model was previously released as AHC-07-LL-44-NF-CC.

HC-7LL44-NF-CC

7.5 dB Hybrid Coupler | 350-2700 MHz | 4 in 4 out | N Female

Electrical Characteristics	
Frequency Range	350-2700 MHz
Insertion Loss	≤ 7.5 dB
Isolation	≥ 23 dB
PIM3 (2x20W)	≤ -153 dBc
VSWR	≤ 1.25
Power Rating (average)	200 W
Peak Power	1 kW
Impedance	50Ω
Mechanical Characteristics	
Connectors	N Female
Dimensions (L x W x D; without connectors)	356 x 121 x 68 mm
Weight	4 kg
Environmental Characteristics	
Operating Temperature	-25° C to +65° C
Humidity	5-95%
Environmental	IP65

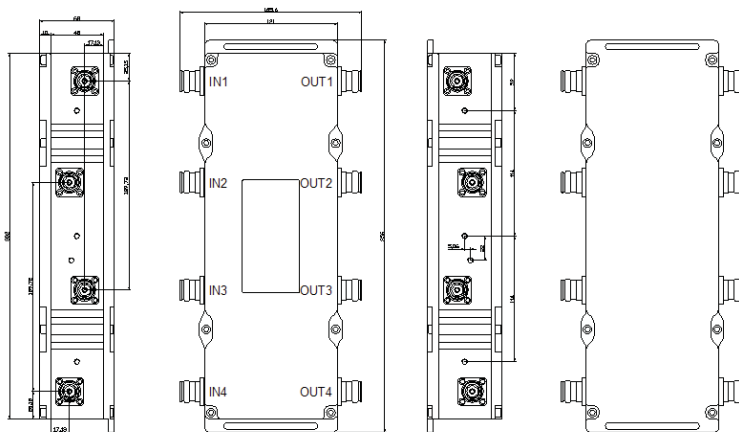

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.