

Features

Automotive Use
 Color Clear Encapsulation
 Excellent Character Appearance
 High Light Output
 IC Compatible
 Low Current Requirements
 Other face/epoxy colors are available

Applications


Message Signs
 VMS

Notes

All Dimensions are in millimeters.
 Tolerance is $\pm 0.25\text{mm}$ unless otherwise stated.
 The slope angle of any pin may be $\pm 5.0^\circ$ MAX.
 Operating Temperature: $-25 \sim +85$
 Storage Temperature: $-25 \sim +100$
 Specifications subject to change without notice.

Part Number	PWL λ_p	Material	Emitted Color	Face Colors		Maximum Ratings			Optical and Electrical Characteristics						Pin Out	
				Epoxy Color	Surface Color	IF	VR	PD	Forward Voltage VF			Reverse Current IR		Luminous Intensity IV		
									typ.	max.	IF@	max.	VR@	typ. dot		IF@
MTAN6621-CHRG	635	GaAsP	HR	White	Grey	30	5.00	85.00	6.30	9.00	20mA	100	5V	7.80	10mA	1
	567	GaP	YG	White	Grey	30	5.00	85.00	6.30	9.00	20mA	100	5V	6.80	10mA	1
Units	nm	-	-	-	-	mA	V	mW	V	-	-	μA	-	mcd	-	-

Package Dimensions and Pin Functions

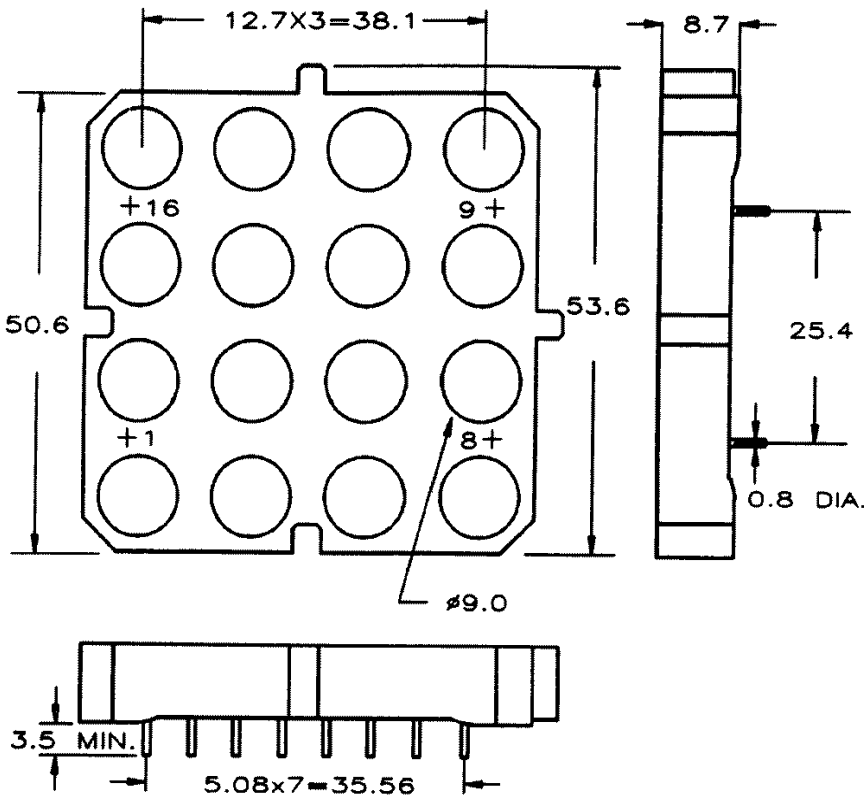

PINOUT 1

COLUMN CATHODE

PIN NO. FUNCTION

1. CATHODE COLUMN 1 (HR)
2. CATHODE COLUMN 1 (G)
3. CATHODE COLUMN 2 (HR)
4. CATHODE COLUMN 2 (G)
5. CATHODE COLUMN 3 (HR)
6. CATHODE COLUMN 3 (G)
7. CATHODE COLUMN 4 (HR)
8. CATHODE COLUMN 4 (G)
9. ANODE ROW 1 (HR)
10. ANODE ROW 1 (G)
11. ANODE ROW 2 (HR)
12. ANODE ROW 2 (G)
13. ANODE ROW 3 (HR)
14. ANODE ROW 3 (G)
15. ANODE ROW 4 (HR)
16. ANODE ROW 4 (G)