


SIL PIN ADAPTOR
ID: 037



STL 1R-XXXX

Series 400



TECHNICAL DATA

Pitch	2,54 mm
Insulating Material	high temp. thermoplast UL94V-0
Contact Material	Brass
Rated Current	3 Amp.
Rated Voltage	100 V _{RMS} /150 V _{DC}
Breakdown Voltage	min. 1000 V _{RMS}
Operating Temperature	-40°C bis +105°C
Maximum Soldering Temperature	260°C for 10 seconds

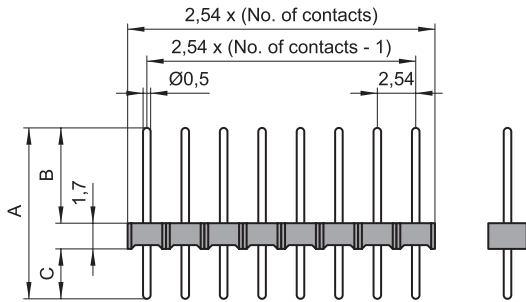

Code	Dimensions		
	A	B	C
0650	6,50	2,30	2,50
0830	8,30	3,40	3,30
1130	11,30	6,30	3,30
1260	12,60	7,60	3,30
1470	14,70	9,70	3,30
custom	_____	_____	_____

All dimensions in mm.
Other dimensions upon request.

STL 1R - XXXX G XX - XXX U

- 1R: 1 row, pitch 2,54mm, round pin
- Code: see table
- G: straight contacts
- XX: GG = Au plated
TT = Sn plated
- Poles: 1 - 36 poles possible
- U: RoHS-compliant with high temp. plastic